

Heat Sink

Introduction

This example is intended as a first introduction to simulations of fluid flow and conjugate heat transfer. It shows the following important points:

- How to draw an air box around a device in order to model convective cooling in this box.
- How to set a total heat flux on a boundary using automatic area computation.
- How to display results in an efficient way using selections in data sets.

The application is also described in detail in the book *Introduction to the Heat Transfer Module*. An extension of the application that takes surface-to-surface radiation into account is also available; see [Heat Sink with Surface-to-Surface Radiation](#).

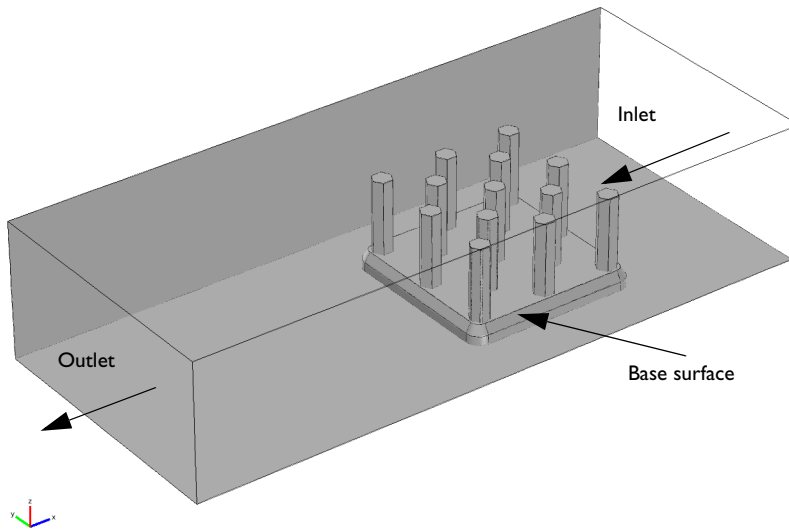


Figure 1: The application setup including channel and heat sink.

Model Definition

The modeled system consists of an aluminum heat sink for cooling of components in electronic circuits mounted inside a channel of rectangular cross section (see [Figure 1](#)).

Such a setup is used to measure the cooling capacity of heat sinks. Air enters the channel at the inlet and exits the channel at the outlet. The base surface of the heat sink receives a 1 W heat flux from an external heat source. All other external faces are thermally insulated.

The cooling capacity of the heat sink can be determined by monitoring the temperature of the base surface of the heat sink.

The model solves a thermal balance for the heat sink and the air flowing in the rectangular channel. Thermal energy is transported through conduction in the aluminum heat sink and through conduction and convection in the cooling air. The temperature field is continuous across the internal surfaces between the heat sink and the air in the channel. The temperature is set at the inlet of the channel. The base of the heat sink receives a 1 W heat flux. The transport of thermal energy at the outlet is dominated by convection.

The flow field is obtained by solving one momentum balance for each space coordinate (x , y , and z) and a mass balance. The inlet velocity is defined by a parabolic velocity profile for fully developed laminar flow. At the outlet, the normal stress is equal the outlet pressure and the tangential stress is canceled. At all solid surfaces, the velocity is set to zero in all three spatial directions.

The thermal conductivity of air, the heat capacity of air, and the air density are all temperature-dependent material properties.

You can find all of the settings mentioned above in the predefined multiphysics coupling for Conjugate Heat Transfer in COMSOL Multiphysics. You also find the material properties, including their temperature dependence, in the Material Browser.

Results

In [Figure 2](#), the hot wake behind the heat sink visible in the plot is a sign of the convective cooling effects. The maximum temperature, reached at the heat sink base, is about 380 K.

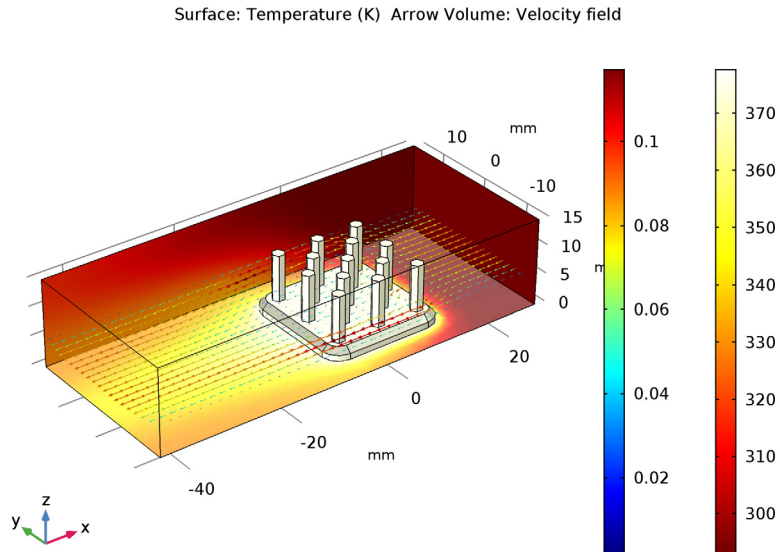


Figure 2: The surface plot shows the temperature field on the channel walls and the heat sink surface, while the arrow plot shows the flow velocity field around the heat sink.

Application Library path: Heat_Transfer_Module/Tutorials,
_Forced_and_Natural_Convection/heat_sink

Modeling Instructions

From the **File** menu, choose **New**.

NEW

In the **New** window, click **Model Wizard**.

MODEL WIZARD

- 1 In the **Model Wizard** window, click **3D**.
- 2 In the **Select Physics** tree, select **Heat Transfer>Conjugate Heat Transfer>Laminar Flow**.
- 3 Click **Add**.
- 4 Click **Study**.
- 5 In the **Select Study** tree, select **Preset Studies for Selected Physics Interfaces>Stationary**.
- 6 Click **Done**.

GEOMETRY I

Note that the **Geometry representation** must be set to **COMSOL kernel** to fit with the numbering of the boundaries used in these instructions.

The model geometry is available as a parameterized geometry sequence in a separate MPH-file. If you want to create it from scratch yourself, you can follow the instructions in the [Geometry Modeling Instructions](#) section. Otherwise, insert the geometry sequence as follows:

- 1 On the **Geometry** toolbar, click **Insert Sequence**.
- 2 Browse to the model's Application Libraries folder and double-click the file `heat_sink_geom_sequence.mph`.

The application's Application Library folder is shown in the **Application Library path** section immediately before the current section. Note that the path given there is relative to the COMSOL Application Library root, which for a standard installation on Windows is `C:\Program Files\COMSOL\COMSOL53\Multiphysics\applications`.

Rotate 1 (rot1)

- 1 In the **Model Builder** window, under **Component 1 (comp1)>Geometry 1** click **Rotate 1 (rot1)**.
- 2 In the **Settings** window for **Geometry**, click **Build Selected**.

Work Plane 2 (wp2)


In the **Model Builder** window, expand the **Component 1 (comp1)>Geometry 1>Work Plane 2 (wp2)** node.

Convert to Solid 1 (csol1)

- 1 In the **Model Builder** window, expand the **Component 1 (comp1)>Geometry 1>Work Plane 2 (wp2)>Plane Geometry** node, then click **Convert to Solid 1 (csol1)**.
- 2 In the **Settings** window for **Convert to Solid**, click **Build Selected**.

Delete Entities 1 (del1)

- 1 In the **Model Builder** window, under **Component 1 (comp1)>Geometry 1>Work Plane 2 (wp2)>Plane Geometry** click **Delete Entities 1 (del1)**.
- 2 In the **Settings** window for **Delete Entities**, locate the **Entities or Objects to Delete** section.
- 3 In the tree, select **csoll>6**.
- 4 On the object **csoll**, select Domains 1–5 and 7–9 only.
- 5 In the **Model Builder** window, click **Geometry 1**.
- 6 On the **Geometry** toolbar, click **Build All**.
- 7 Click the **Zoom Extents** button on the **Graphics** toolbar.
To facilitate face selection in the next steps, use the **Wireframe rendering** option (skip this step if you followed the instructions in the appendix):
- 8 Click the **Wireframe Rendering** button on the **Graphics** toolbar.

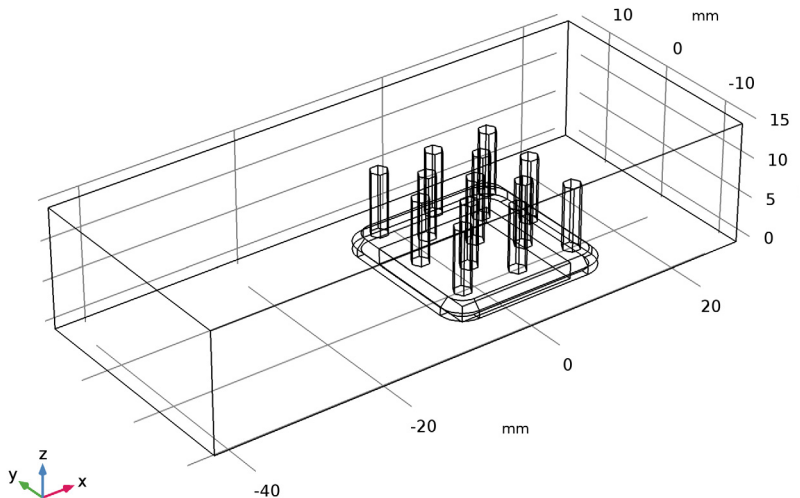

LAMINAR FLOW (SPF)

- 1 In the **Model Builder** window, under **Component 1 (comp1)** click **Laminar Flow (spf)**.
- 2 In the **Settings** window for **Laminar Flow**, locate the **Domain Selection** section.
- 3 From the **Selection** list, choose **Air**.

HEAT TRANSFER (HT)

On the **Physics** toolbar, click **Laminar Flow (spf)** and choose **Heat Transfer (ht)**.

Fluid 1

- 1 In the **Model Builder** window, under **Component 1 (comp1)>Heat Transfer (ht)** click **Fluid 1**.
- 2 In the **Settings** window for **Fluid**, locate the **Domain Selection** section.
- 3 From the **Selection** list, choose **Air**.

MATERIALS

Next, add materials.

ADD MATERIAL

- 1 On the **Home** toolbar, click **Add Material** to open the **Add Material** window.
- 2 Go to the **Add Material** window.
- 3 In the tree, select **Built-In>Air**.
- 4 Click **Add to Component** in the window toolbar.

MATERIALS

Air (mat1)

- 1 In the **Model Builder** window, under **Component 1 (comp1)>Materials** click **Air (mat1)**.
- 2 In the **Settings** window for **Material**, locate the **Geometric Entity Selection** section.
- 3 From the **Selection** list, choose **Air**.

ADD MATERIAL

- 1 Go to the **Add Material** window.
- 2 In the tree, select **Built-In>Aluminum 3003-H18**.
- 3 Click **Add to Component** in the window toolbar.

MATERIALS

Aluminum 3003-H18 (mat2)

- 1 In the **Model Builder** window, under **Component 1 (comp1)>Materials** click **Aluminum 3003-H18 (mat2)**.
- 2 In the **Settings** window for **Material**, locate the **Geometric Entity Selection** section.
- 3 From the **Selection** list, choose **Aluminum**.

ADD MATERIAL

- 1 Go to the **Add Material** window.
- 2 In the tree, select **Built-In>Silica glass**.
- 3 Click **Add to Component** in the window toolbar.

MATERIALS

Silica glass (mat3)

- 1 In the **Model Builder** window, under **Component 1 (comp1)>Materials** click **Silica glass (mat3)**.
- 2 In the **Settings** window for **Material**, locate the **Geometric Entity Selection** section.
- 3 From the **Selection** list, choose **Silica Glass**.
- 4 On the **Home** toolbar, click **Add Material** to close the **Add Material** window.

GLOBAL DEFINITIONS

Parameters

- 1 In the **Model Builder** window, expand the **Global Definitions** node, then click **Parameters**.
- 2 In the **Settings** window for **Parameters**, locate the **Parameters** section.
- 3 In the table, enter the following settings:

Name	Expression	Value	Description
U0	5[cm/s]	0.05 m/s	Mean inlet velocity
P0	1[W]	1 W	Total power dissipated by the electronics package

Now define the physical properties of the model. Start with the fluid domain.

LAMINAR FLOW (SPF)

On the **Physics** toolbar, click **Heat Transfer (ht)** and choose **Laminar Flow (spf)**.

The no-slip condition is the default boundary condition for the fluid. Define the inlet and outlet conditions as described below.

- 1 In the **Model Builder** window, under **Component 1 (comp1)** click **Laminar Flow (spf)**.

Inlet 1

- 1 On the **Physics** toolbar, click **Boundaries** and choose **Inlet**.
- 2 In the **Settings** window for **Inlet**, locate the **Boundary Selection** section.
- 3 From the **Selection** list, choose **Inlet**.

- 4 Locate the **Boundary Condition** section. From the list, choose **Laminar inflow**.
- 5 Locate the **Laminar Inflow** section. In the U_{av} text field, type U0.

Outlet 1

- 1 On the **Physics** toolbar, click **Boundaries** and choose **Outlet**.
- 2 Click the **Zoom Extents** button on the **Graphics** toolbar.
- 3 In the **Settings** window for **Outlet**, locate the **Boundary Selection** section.
- 4 From the **Selection** list, choose **Outlet**.

HEAT TRANSFER (HT)

Thermal insulation is the default boundary condition for the temperature. Define the inlet temperature and the outlet condition as described below.

- 1 In the **Model Builder** window, under **Component 1 (comp1)** click **Heat Transfer (ht)**.

Temperature 1

- 1 On the **Physics** toolbar, click **Boundaries** and choose **Temperature**.
- 2 In the **Settings** window for **Temperature**, locate the **Boundary Selection** section.
- 3 From the **Selection** list, choose **Inlet**.

The ambient temperature is defined in the main node of the Heat Transfer interface. Its default value is 293.15 K which corresponds to the inlet temperature used in this model. It is possible to edit the ambient temperature value or to define it using the meteorological data which gives access to climate data from more than 6000 stations in the world.

- 4 Locate the **Temperature** section. From the T_0 list, choose **Ambient temperature (ht)**.

Outflow 1

- 1 On the **Physics** toolbar, click **Boundaries** and choose **Outflow**.
- 2 In the **Settings** window for **Outflow**, locate the **Boundary Selection** section.
- 3 From the **Selection** list, choose **Outlet**.

Next, use the P_0 parameter to define the total heat source in the electronics package.


Heat Source 1

- 1 On the **Physics** toolbar, click **Domains** and choose **Heat Source**.
- 2 In the **Settings** window for **Heat Source**, locate the **Domain Selection** section.
- 3 From the **Selection** list, choose **Silica Glass**.
- 4 Locate the **Heat Source** section. Click the **Heat rate** button.
- 5 In the P_0 text field, type P0.

MESH I

- 1 In the **Model Builder** window, under **Component 1 (comp1)** click **Mesh I**.
- 2 In the **Settings** window for **Mesh**, locate the **Mesh Settings** section.
- 3 From the **Element size** list, choose **Extra coarse**.
- 4 Click **Build All**.
To get a better view of the mesh, hide some of the boundaries.
- 5 Click the **Click and Hide** button on the **Graphics** toolbar.
- 6 Click the **Select Boundaries** button on the **Graphics** toolbar.
- 7 Select Boundaries 1, 2, and 4 only.

The finished mesh should look like that in the figure below.

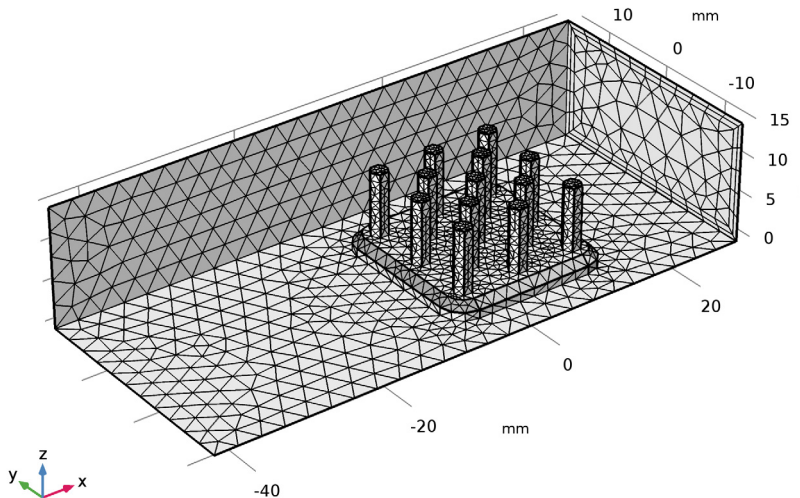

To achieve more accurate numerical results, this mesh can be refined by choosing another predefined element size. However, doing so requires more computational time and memory.

STUDY I

On the **Home** toolbar, click **Compute**.

RESULTS

Temperature (ht)

Four default plots are generated automatically. The first one shows the temperature on the wall boundaries, the third one shows the velocity magnitude on five parallel slices, and the last one shows the pressure field. Add an arrow plot to visualize the velocity field with temperature field.

- 1 In the **Model Builder** window, under **Results** click **Temperature (ht)**.
- 2 On the **Temperature (ht)** toolbar, click **Arrow Volume**.

Arrow Volume 1

- 1 In the **Model Builder** window, under **Results>Temperature (ht)** click **Arrow Volume 1**.
- 2 In the **Settings** window for **Arrow Volume**, click **Replace Expression** in the upper-right corner of the **Expression** section. From the menu, choose **Component 1>Laminar Flow>Velocity and pressure>u,v,w - Velocity field**.
- 3 Locate the **Arrow Positioning** section. Find the **X grid points** subsection. In the **Points** text field, type 40.
- 4 Find the **Y grid points** subsection. In the **Points** text field, type 20.
- 5 Find the **Z grid points** subsection. From the **Entry method** list, choose **Coordinates**.
- 6 In the **Coordinates** text field, type 5[mm].

Color Expression 1

- 1 On the **Temperature (ht)** toolbar, click **Color Expression**.
- 2 In the **Settings** window for **Color Expression**, click **Replace Expression** in the upper-right corner of the **Expression** section. From the menu, choose **Component 1>Laminar Flow>Velocity and pressure>spf.U - Velocity magnitude**.
- 3 On the **Temperature (ht)** toolbar, click **Plot**.

Global Evaluation 1

- 1 On the **Results** toolbar, click **Global Evaluation**.
- 2 In the **Settings** window for **Global Evaluation**, type Energy Balance in the **Label** text field.
- 3 Click **Add Expression** in the upper-right corner of the **Expressions** section. From the menu, choose **Component 1>Heat Transfer>Global>Net powers>ht.ntefluxInt - Total net energy rate**.

4 Click **Add Expression** in the upper-right corner of the **Expressions** section. From the menu, choose **Component 1>Heat Transfer>Global>Heat source powers>ht.QInt - Total heat source**.

5 Click **Evaluate**.

TABLE

1 Go to the **Table** window.

You can verify that the two values match and are close to 1 W in the **Table 1** tab.

Geometry Modeling Instructions

If you wish to create the geometry yourself, follow these steps.

ROOT

Parameters

On the **Home** toolbar, click **Parameters**.

GLOBAL DEFINITIONS

Parameters

1 In the **Settings** window for **Parameters**, locate the **Parameters** section.

2 In the table, enter the following settings:

Name	Expression	Value	Description
L_channel	7[cm]	0.07 m	Channel length
W_channel	3[cm]	0.03 m	Channel width
H_channel	1.5[cm]	0.015 m	Channel height
L_chip	1.5[cm]	0.015 m	Chip size
H_chip	2[mm]	0.002 m	Chip height

3 On the **Home** toolbar, click **Component** and choose **Add Component>3D**.

GEOMETRY 1

1 In the **Model Builder** window, under **Component 1 (comp1)** click **Geometry 1**.

2 In the **Settings** window for **Geometry**, locate the **Units** section.

3 From the **Length unit** list, choose **mm**.

Work Plane 1 (wp1)

- 1 On the **Geometry** toolbar, click **Work Plane**.
- 2 In the **Settings** window for **Work Plane**, locate the **Plane Definition** section.
- 3 From the **Plane** list, choose **xz-plane**.
- 4 In the **y-coordinate** text field, type -7.5.

Plane Geometry

In the **Model Builder** window, under **Component 1 (comp1)>Geometry 1>Work Plane 1 (wp1)** click **Plane Geometry**.

Bézier Polygon 1 (b1)

- 1 On the **Work Plane** toolbar, click **Primitives** and choose **Bézier Polygon**.
- 2 In the **Settings** window for **Bézier Polygon**, locate the **Polygon Segments** section.
- 3 Find the **Added segments** subsection. Click **Add Linear**.
- 4 Find the **Control points** subsection. In row **1**, set **xw** to -10.495.
- 5 In row **2**, set **xw** to -9.495.
- 6 Find the **Added segments** subsection. Click **Add Linear**.
- 7 Find the **Control points** subsection. In row **2**, set **yw** to 2.
- 8 Find the **Added segments** subsection. Click **Add Linear**.
- 9 Find the **Control points** subsection. In row **2**, set **xw** to -10.495.
- 10 In row **2**, set **yw** to 1.
- 11 Find the **Added segments** subsection. Click **Add Linear**.
- 12 Find the **Control points** subsection. In row **2**, set **yw** to 0.

Work Plane 1 (wp1)

In the **Model Builder** window, under **Component 1 (comp1)>Geometry 1** click **Work Plane 1 (wp1)**.

Revolve 1 (rev1)

- 1 On the **Geometry** toolbar, click **Revolve**.
- 2 In the **Settings** window for **Revolve**, locate the **Revolution Angles** section.
- 3 Click the **Angles** button.
- 4 In the **End angle** text field, type 90.
- 5 Locate the **Revolution Axis** section. From the **Axis type** list, choose **3D**.
- 6 Find the **Point on the revolution axis** subsection. In the **xw** text field, type -7.5.
- 7 In the **yw** text field, type -7.5.

- 8 Find the **Direction of revolution axis** subsection. In the **yw** text field, type 0.
- 9 In the **zw** text field, type 1.
- 10 Locate the **Selections of Resulting Entities** section. Click **New**.
- 11 In the **New Cumulative Selection** dialog box, type ALuminum in the **Name** text field.
- 12 Click **OK**.

Extrude 1 (ext1)

- 1 On the **Geometry** toolbar, click **Extrude**.
- 2 In the **Settings** window for **Extrude**, locate the **General** section.
- 3 From the **Extrude from** list, choose **Faces**.
- 4 On the object **rev1**, select Boundary 1 only.
- 5 Locate the **Distances** section. In the table, enter the following settings:

Distances (mm)
15

- 6 Locate the **Selections of Resulting Entities** section. From the **Contribute to** list, choose **Aluminum**.
- 7 Locate the **General** section. In the tree, select **rev1**.

Rotate 1 (rot1)

- 1 On the **Geometry** toolbar, click **Transforms** and choose **Rotate**.
- 2 In the **Settings** window for **Rotate**, locate the **Input** section.
- 3 From the **Input objects** list, choose **Aluminum**.
- 4 Select the **Keep input objects** check box.
- 5 Locate the **Rotation Angle** section. In the **Rotation** text field, type range (90, 90, 270).
- 6 Locate the **Selections of Resulting Entities** section. From the **Contribute to** list, choose **Aluminum**.

Work Plane 2 (wp2)

- 1 On the **Geometry** toolbar, click **Work Plane**.
- 2 In the **Settings** window for **Work Plane**, locate the **Plane Definition** section.
- 3 From the **Plane type** list, choose **Face parallel**.
- 4 On the object **ext1**, select Boundary 4 only.

Plane Geometry

In the **Model Builder** window, under **Component 1 (comp1)>Geometry 1>Work Plane 2 (wp2)** click **Plane Geometry**.

Cross Section 1 (crol)

- 1 On the **Work Plane** toolbar, click **Cross Section**.
- 2 In the **Settings** window for **Cross Section**, locate the **Selections of Resulting Entities** section.
- 3 Select the **Resulting objects selection** check box.

Convert to Curve 1 (ccurl)

- 1 On the **Work Plane** toolbar, click **Conversions** and choose **Convert to Curve**.
- 2 In the **Settings** window for **Convert to Curve**, locate the **Input** section.
- 3 From the **Input objects** list, choose **Cross Section 1**.
- 4 Locate the **Selections of Resulting Entities** section. Select the **Resulting objects selection** check box.

Convert to Solid 1 (csol1)

- 1 On the **Work Plane** toolbar, click **Conversions** and choose **Convert to Solid**.
- 2 In the **Settings** window for **Convert to Solid**, locate the **Input** section.
- 3 From the **Input objects** list, choose **Convert to Curve 1**.
- 4 Click **Build Selected**.

Box Selection 2 (boxsel2)

- 1 On the **Work Plane** toolbar, click **Selections** and choose **Box Selection**.
- 2 On the **Work Plane** toolbar, click **Selections** and choose **Box Selection**.
- 3 In the **Settings** window for **Box Selection**, locate the **Box Limits** section.
- 4 In the **xw minimum** text field, type -10.
- 5 In the **xw maximum** text field, type -10.
- 6 In the **yw minimum** text field, type 0.
- 7 In the **yw maximum** text field, type 0.
- 8 On the **Work Plane** toolbar, click **Build All**.

Difference Selection 1 (difsell)

- 1 On the **Work Plane** toolbar, click **Selections** and choose **Difference Selection**.
- 2 In the **Settings** window for **Difference Selection**, locate the **Input Entities** section.
- 3 Click **Add**.

- 4 In the **Add** dialog box, select **Box Selection 1** in the **Selections to add** list.
- 5 Click **OK**.
- 6 In the **Settings** window for **Difference Selection**, locate the **Input Entities** section.
- 7 Click **Add**.
- 8 In the **Add** dialog box, select **Box Selection 2** in the **Selections to subtract** list.
- 9 Click **OK**.

Delete Entities 1 (del1)

- 1 Right-click **Plane Geometry** and choose **Delete Entities**.
- 2 In the **Settings** window for **Delete Entities**, locate the **Entities or Objects to Delete** section.
- 3 From the **Geometric entity level** list, choose **Domain**.
- 4 From the **Selection** list, choose **Difference Selection 1**.

Work Plane 2 (wp2)

In the **Model Builder** window, under **Component 1 (comp1)>Geometry 1** click **Work Plane 2 (wp2)**.

Extrude 2 (ext2)

- 1 On the **Geometry** toolbar, click **Extrude**.
- 2 In the **Settings** window for **Extrude**, locate the **General** section.
- 3 Find the **Input objects** subsection. Select the **Active** toggle button.
- 4 In the **Model Builder** window, click **Extrude 2 (ext2)**.
- 5 In the **Settings** window for **Extrude**, locate the **Distances** section.
- 6 In the table, enter the following settings:

Distances (mm)
2

- 7 Select the **Reverse direction** check box.
- 8 Locate the **Selections of Resulting Entities** section. From the **Contribute to** list, choose **Aluminum**.

Work Plane 3 (wp3)

- 1 On the **Geometry** toolbar, click **Work Plane**.
- 2 In the **Settings** window for **Work Plane**, locate the **Plane Definition** section.
- 3 In the **z-coordinate** text field, type 2.
- 4 Locate the **Unite Objects** section. Clear the **Unite objects** check box.

Plane Geometry

In the **Model Builder** window, under **Component 1 (comp1)>Geometry 1>Work Plane 3 (wp3)** click **Plane Geometry**.

Bézier Polygon 1 (b1)

- 1 On the **Work Plane** toolbar, click **Primitives** and choose **Bézier Polygon**.
- 2 In the **Settings** window for **Bézier Polygon**, locate the **Polygon Segments** section.
- 3 Find the **Added segments** subsection. Click **Add Linear**.
- 4 Find the **Control points** subsection. In row **1**, set **xw** to -8.597.
- 5 In row **1**, set **yw** to -7.5.
- 6 In row **2**, set **xw** to -8.048.
- 7 In row **2**, set **yw** to -8.45.
- 8 Find the **Added segments** subsection. Click **Add Linear**.
- 9 Find the **Control points** subsection. In row **2**, set **xw** to -6.952.
- 10 Find the **Added segments** subsection. Click **Add Linear**.
- 11 Find the **Control points** subsection. In row **2**, set **xw** to -6.4.
- 12 In row **2**, set **yw** to -7.5.
- 13 Find the **Added segments** subsection. Click **Add Linear**.
- 14 Find the **Control points** subsection. In row **2**, set **xw** to -6.952.
- 15 In row **2**, set **yw** to -6.55.
- 16 Find the **Added segments** subsection. Click **Add Linear**.
- 17 Find the **Control points** subsection. In row **2**, set **xw** to -8.048.

Copy 1 (copy1)

- 1 On the **Work Plane** toolbar, click **Transforms** and choose **Copy**.
- 2 Select the object **b1** only.
- 3 In the **Settings** window for **Copy**, locate the **Displacement** section.
- 4 In the **xw** text field, type 3.748.
- 5 In the **yw** text field, type 3.748.

Work Plane 3 (wp3)

In the **Model Builder** window, under **Component 1 (comp1)>Geometry 1** click **Work Plane 3 (wp3)**.

Extrude 3 (ext3)

- 1 On the **Geometry** toolbar, click **Extrude**.

- 2 In the **Settings** window for **Extrude**, locate the **Distances** section.
- 3 In the table, enter the following settings:

Distances (mm)
8

Array 1 (arr1)

- 1 On the **Geometry** toolbar, click **Transforms** and choose **Array**.
- 2 Click the **Zoom Extents** button on the **Graphics** toolbar.
- 3 Select the object **ext3(1)** only.
- 4 In the **Settings** window for **Array**, locate the **Size** section.
- 5 In the **x size** text field, type 3.
- 6 In the **y size** text field, type 3.
- 7 Locate the **Displacement** section. In the **x** text field, type 7.495.
- 8 In the **y** text field, type 7.495.
- 9 Locate the **Selections of Resulting Entities** section. From the **Contribute to** list, choose **Aluminum**.

Array 2 (arr2)

- 1 On the **Geometry** toolbar, click **Transforms** and choose **Array**.
- 2 Select the object **ext3(2)** only.
- 3 In the **Settings** window for **Array**, locate the **Size** section.
- 4 In the **x size** text field, type 2.
- 5 In the **y size** text field, type 2.
- 6 Locate the **Displacement** section. In the **x** text field, type 7.495.
- 7 In the **y** text field, type 7.495.
- 8 Locate the **Selections of Resulting Entities** section. From the **Contribute to** list, choose **Aluminum**.

Union 1 (un1)

- 1 On the **Geometry** toolbar, click **Booleans and Partitions** and choose **Union**.
- 2 In the **Settings** window for **Union**, locate the **Union** section.
- 3 From the **Input objects** list, choose **Aluminum**.
- 4 Locate the **Selections of Resulting Entities** section. From the **Contribute to** list, choose **Aluminum**.

5 Locate the **Union** section. Clear the **Keep interior boundaries** check box.

Block 1 (blk1)

- 1 On the **Geometry** toolbar, click **Block**.
- 2 In the **Settings** window for **Block**, locate the **Size and Shape** section.
- 3 In the **Width** text field, type L_chip.
- 4 In the **Depth** text field, type L_chip.
- 5 In the **Height** text field, type H_chip.
- 6 Locate the **Position** section. From the **Base** list, choose **Center**.
- 7 In the **z** text field, type -H_chip/2.
- 8 Locate the **Selections of Resulting Entities** section. Click **New**.
- 9 In the **New Cumulative Selection** dialog box, type Silica Glass in the **Name** text field.
- 10 Click **OK**.

Block 2 (blk2)

- 1 On the **Geometry** toolbar, click **Block**.
- 2 In the **Settings** window for **Block**, locate the **Size and Shape** section.
- 3 In the **Width** text field, type L_channel.
- 4 In the **Depth** text field, type W_channel.
- 5 In the **Height** text field, type H_channel.
- 6 Locate the **Position** section. In the **x** text field, type -45.
- 7 In the **y** text field, type -W_channel/2.

Form Union (fin)

- 1 In the **Model Builder** window, under **Component 1 (comp1)>Geometry 1** click **Form Union (fin)**.
- 2 In the **Settings** window for **Form Union/Assembly**, click **Build Selected**.

Explicit Selection 1 (sel1)

- 1 On the **Geometry** toolbar, click **Selections** and choose **Explicit Selection**.
- 2 On the object **fin**, select Domain 1 only.
- 3 In the **Settings** window for **Explicit Selection**, type Air in the **Label** text field.
- 4 Click the **Zoom Extents** button on the **Graphics** toolbar.

Explicit Selection 2 (sel2)

- 1 On the **Geometry** toolbar, click **Selections** and choose **Explicit Selection**.

- 2 In the **Settings** window for **Explicit Selection**, type Inlet in the **Label** text field.
- 3 Locate the **Entities to Select** section. From the **Geometric entity level** list, choose **Boundary**.
- 4 On the object **fin**, select Boundary 129 only.

Explicit Selection 3 (sel3)

- 1 On the **Geometry** toolbar, click **Selections** and choose **Explicit Selection**.
- 2 In the **Settings** window for **Explicit Selection**, type Outlet in the **Label** text field.
- 3 Locate the **Entities to Select** section. From the **Geometric entity level** list, choose **Boundary**.
- 4 On the object **fin**, select Boundary 1 only.

Adjacent Selection 1 (adjsel1)

- 1 On the **Geometry** toolbar, click **Selections** and choose **Adjacent Selection**.
- 2 In the **Settings** window for **Adjacent Selection**, locate the **Input Entities** section.
- 3 Click **Add**.
- 4 In the **Add** dialog box, select **Air** in the **Input selections** list.
- 5 Click **OK**.
- 6 In the **Settings** window for **Adjacent Selection**, type Air Boundaries in the **Label** text field.

Difference Selection 1 (difsell)

- 1 On the **Geometry** toolbar, click **Selections** and choose **Difference Selection**.
- 2 In the **Settings** window for **Difference Selection**, type Exterior Walls in the **Label** text field.
- 3 Locate the **Geometric Entity Level** section. From the **Level** list, choose **Boundary**.
- 4 Locate the **Input Entities** section. Click **Add**.
- 5 In the **Add** dialog box, select **Air Boundaries** in the **Selections to add** list.
- 6 Click **OK**.
- 7 In the **Settings** window for **Difference Selection**, locate the **Input Entities** section.
- 8 Click **Add**.
- 9 In the **Add** dialog box, In the **Selections to subtract** list, choose **Inlet** and **Outlet**.
- 10 Click **OK**.

Intersection Selection 1 (intsel1)

- 1 On the **Geometry** toolbar, click **Selections** and choose **Intersection Selection**.

- 2 In the **Settings** window for **Intersection Selection**, type Thermal Grease in the **Label** text field.
- 3 Locate the **Geometric Entity Level** section. From the **Level** list, choose **Boundary**.
- 4 Locate the **Input Entities** section. Click **Add**.
- 5 In the **Add** dialog box, In the **Selections to intersect** list, choose **Aluminum** and **Silica Glass**.
- 6 Click **OK**.

