




# Waveguide Iris Bandpass Filter

## Introduction

---

A conductive diaphragm, an iris, placed transverse to a waveguide aperture causes a discontinuity and generates shunt reactance. Bandpass frequency response can be achieved from cascaded cavity resonators combined with such reactive elements, which can be created by inserting a series of iris elements inside the waveguide. This example consists of a WR-90 X-band waveguide and symmetrical inductive diaphragms (irises). The calculated S-parameters show good bandpass response and out-of-band rejection.

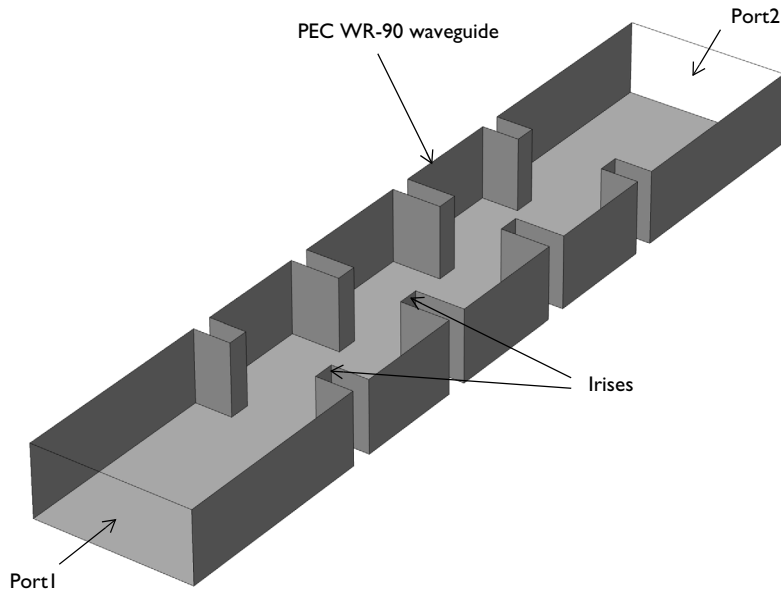

*Figure 1: Symmetrical irises inside the waveguide generate shunt inductance. The top surface is removed to show the inside.*

## Model Definition

---

This example uses a WR-90 waveguide for X-band applications. The waveguide and iris parts are modeled as perfect electric conductors (PECs) and the inside of the waveguide is filled with air. On each end of the waveguide, a port boundary condition is applied with the predefined rectangular  $TE_{10}$  mode. Only one port is excited to observe the S-parameters of the example. The upper cut-off frequency can be approximately estimated using the resonant frequency of the biggest cavity located in the middle of the filter via

$$f_{nml} = \frac{c}{2\pi\sqrt{\epsilon_r\mu_r}} \sqrt{\left(\frac{m\pi}{a}\right)^2 + \left(\frac{n\pi}{b}\right)^2 + \left(\frac{l\pi}{d}\right)^2}$$

where  $a$  and  $b$  are the dimensions of the waveguide's aperture and  $d$  is the length of the cavity. For this example, the values  $a = 2.286$  cm,  $b = 1.016$  cm, and  $d = 1.73$  cm give a resonant frequency at the dominant mode, TE<sub>101</sub>, of 10.87 GHz. Because the cavities are not completely closed but formed with the open irises, this estimation gives only an approximated value.

### Results and Discussion

The default plot shows the norm of the electric fields in the waveguide; see Figure 2. At 10 GHz, the shape of the field distribution in each section of cavities looks like that of the dominant mode of a cavity.

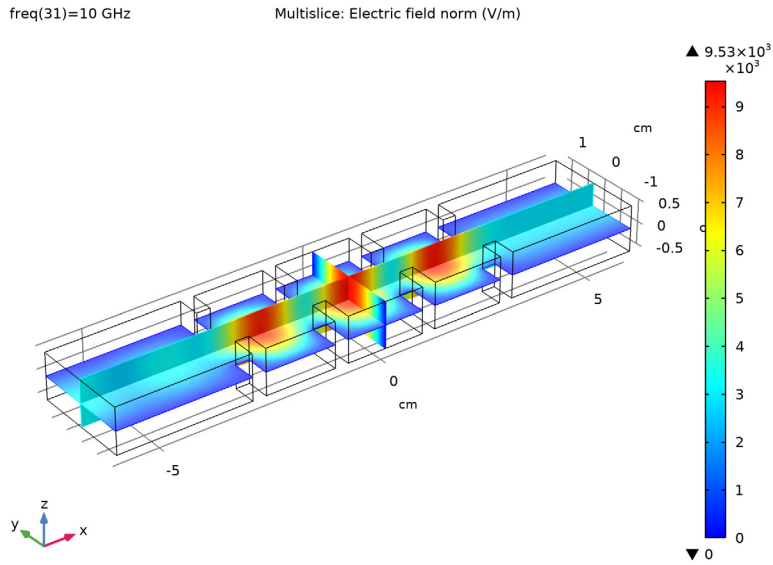


Figure 2: The E-field norm plot at the passband frequency shows the dominant mode resonance in each cavity formed by the irises.

Figure 3 shows the calculated S-parameters. The passband is around 10 GHz and good out-of-band rejection frequency response is observed.

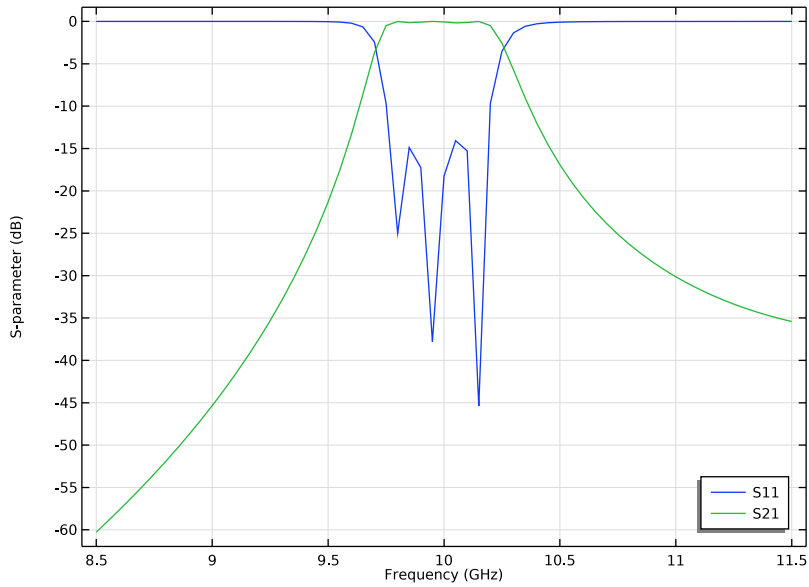


Figure 3: The calculated S-parameters show good matching characteristics as well as out-of-band rejection.

In Figure 4, the calculated S-parameters from the Frequency Domain, Modal method are plotted together with those of the discrete frequency sweep. While the frequency resolution of the Frequency Domain, Modal is five times finer than that of the discrete frequency sweep, the simulation time is four times faster to analyze the same filter.

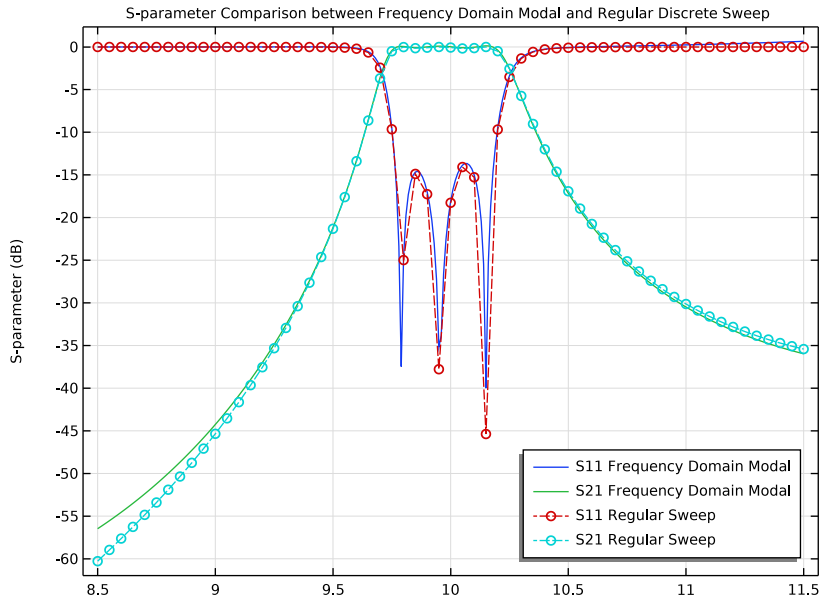


Figure 4: The calculated S-parameters from the Frequency Domain, Modal method are plotted with those of the discrete frequency sweep (dashed lines with circle makers).

## References


1. D.M. Pozar, *Microwave Engineering*, John Wiley & Sons, 1998.
2. R.E. Collin, *Foundation of Microwave Engineering*, McGraw-Hill, 1992.

**Application Library path:** RF\_Module/Filters/waveguide\_iris\_filter




## Modeling Instructions

From the **File** menu, choose **New**.

### NEW


In the **New** window, click  **Model Wizard**.

## MODEL WIZARD

- 1 In the **Model Wizard** window, click  **3D**.
- 2 In the **Select Physics** tree, select **Radio Frequency>Electromagnetic Waves, Frequency Domain (emw)**.
- 3 Click **Add**.
- 4 Click  **Study**.
- 5 In the **Select Study** tree, select **General Studies>Frequency Domain**.
- 6 Click  **Done**.


## STUDY I

### *Step 1: Frequency Domain*

- 1 In the **Model Builder** window, under **Study I** click **Step 1: Frequency Domain**.
- 2 In the **Settings** window for **Frequency Domain**, locate the **Study Settings** section.
- 3 Click  **Range**.
- 4 In the **Range** dialog box, type 8.5[GHz] in the **Start** text field.
- 5 In the **Step** text field, type 0.05[GHz].
- 6 In the **Stop** text field, type 11.5[GHz].
- 7 Click **Replace**.

## GLOBAL DEFINITIONS

### *Parameters I*



- 1 In the **Model Builder** window, under **Global Definitions** click **Parameters I**.
- 2 In the **Settings** window for **Parameters**, locate the **Parameters** section.
- 3 Click  **Load from File**.
- 4 Browse to the model's Application Libraries folder and double-click the file `waveguide_iris_filter_parameters.txt`.

## GEOMETRY I

- 1 In the **Model Builder** window, under **Component I (comp1)** click **Geometry I**.
- 2 In the **Settings** window for **Geometry**, locate the **Units** section.
- 3 From the **Length unit** list, choose **cm**.

Create a block for the WR-90 waveguide.

WR-90


- 1 In the **Geometry** toolbar, click  **Block**.
- 2 In the **Settings** window for **Block**, type WR-90 in the **Label** text field.
- 3 Locate the **Size and Shape** section. In the **Width** text field, type 12.
- 4 In the **Depth** text field, type w\_wg.
- 5 In the **Height** text field, type h\_wg.
- 6 Locate the **Position** section. From the **Base** list, choose **Center**.
- 7 Click  **Build All Objects**.

Choose wireframe rendering to get a view inside the waveguide when adding the irises.

- 8 Click the  **Wireframe Rendering** button in the **Graphics** toolbar.


Next, add a block for generating the inner irises, which form the center cavity.

*Iris 1*


- 1 In the **Geometry** toolbar, click  **Block**.
- 2 In the **Settings** window for **Block**, type Iris1 in the **Label** text field.
- 3 Locate the **Size and Shape** section. In the **Width** text field, type d\_iris.
- 4 In the **Depth** text field, type l\_iris1.
- 5 In the **Height** text field, type h\_wg.
- 6 Locate the **Position** section. From the **Base** list, choose **Center**.
- 7 In the **x** text field, type spacing/2.
- 8 In the **y** text field, type (w\_wg-l\_iris1)/2.

Add another block for generating the outer irises, which enclose the first and last cavities.

*Iris 2*


- 1 In the **Geometry** toolbar, click  **Block**.
- 2 In the **Settings** window for **Block**, type Iris2 in the **Label** text field.
- 3 Locate the **Size and Shape** section. In the **Width** text field, type d\_iris.
- 4 In the **Depth** text field, type l\_iris2.
- 5 In the **Height** text field, type h\_wg.
- 6 Locate the **Position** section. From the **Base** list, choose **Center**.
- 7 In the **x** text field, type spacing\*1.42.
- 8 In the **y** text field, type (w\_wg-l\_iris2)/2.

9 Click  **Build All Objects**.

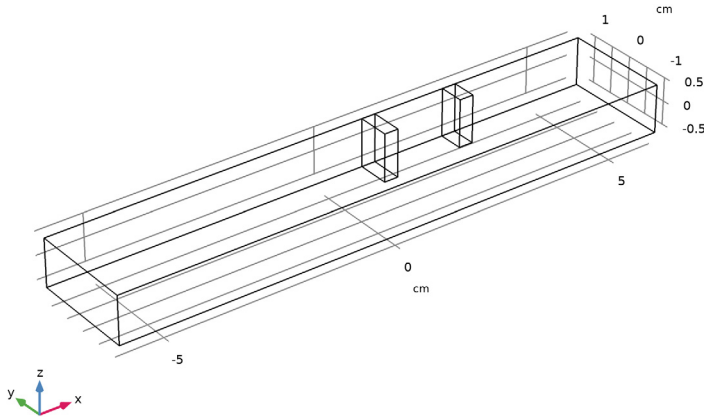


Create symmetrical inductive diaphragms by mirroring the iris blocks a couple of times.

*Mirror 1 (mir1)*

- 1 In the **Geometry** toolbar, click  **Transforms** and choose **Mirror**.
- 2 Select the objects **blk2** and **blk3** only.
- 3 In the **Settings** window for **Mirror**, locate the **Input** section.
- 4 Select the **Keep input objects** check box.
- 5 Locate the **Normal Vector to Plane of Reflection** section. In the **x** text field, type 1.
- 6 In the **z** text field, type 0.


*Mirror 2 (mir2)*


- 1 In the **Geometry** toolbar, click  **Transforms** and choose **Mirror**.
- 2 Select the objects **blk2**, **blk3**, **mir1(1)**, and **mir1(2)** only.
- 3 In the **Settings** window for **Mirror**, locate the **Input** section.
- 4 Select the **Keep input objects** check box.
- 5 Locate the **Normal Vector to Plane of Reflection** section. In the **y** text field, type 1.
- 6 In the **z** text field, type 0.

*Difference 1 (dif1)*

- 1 In the **Geometry** toolbar, click  **Booleans and Partitions** and choose **Difference**.



- 2 Select the object **blk1** only.
- 3 In the **Settings** window for **Difference**, locate the **Difference** section.
- 4 Find the **Objects to subtract** subsection. Select the  **Activate Selection** toggle button.
- 5 Select the objects **blk2**, **blk3**, **mir1(1)**, **mir1(2)**, **mir2(1)**, **mir2(2)**, **mir2(3)**, and **mir2(4)** only.
- 6 Click  **Build All Objects**.

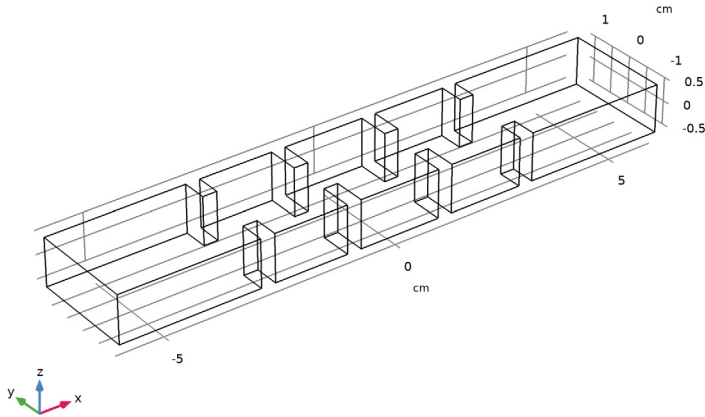


## ELECTROMAGNETIC WAVES, FREQUENCY DOMAIN (EMW)

Now, set up the physics. The default boundary condition, Perfect Electric Conductor, applies to all exterior boundaries.

*Port 1*

- 1 In the **Model Builder** window, under **Component 1 (comp1)** right-click **Electromagnetic Waves, Frequency Domain (emw)** and choose **Port**.

2 Select Boundary 1 only.

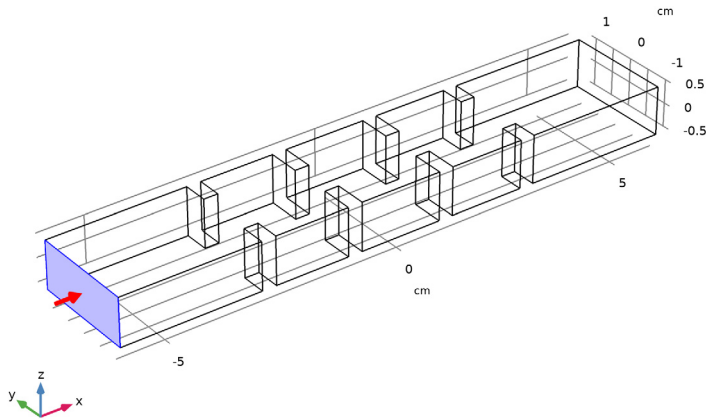

The excitation port

3 In the **Settings** window for **Port**, locate the **Port Properties** section.


4 From the **Type of port** list, choose **Rectangular**.

For the first port, wave excitation is **on** by default.

*Port 2*

1 In the **Physics** toolbar, click  **Boundaries** and choose **Port**.

2 Select Boundary 38 only.

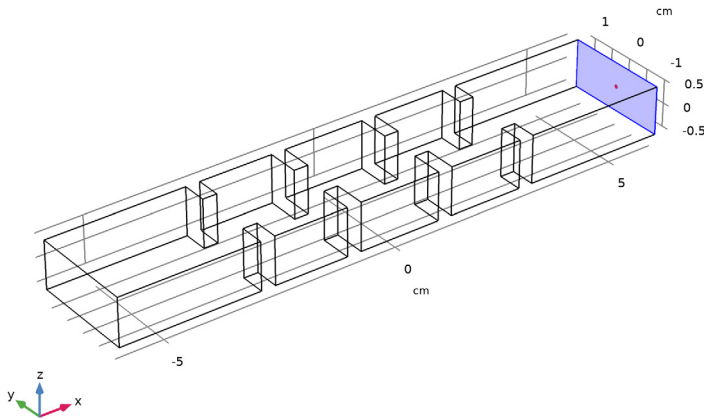

The observation port

3 In the **Settings** window for **Port**, locate the **Port Properties** section.

4 From the **Type of port** list, choose **Rectangular**.

## MATERIALS

Assign material properties on the model. Use air for all domains.

### ADD MATERIAL

1 In the **Home** toolbar, click  **Add Material** to open the **Add Material** window.

2 Go to the **Add Material** window.


3 In the tree, select **Built-in>Air**.

4 Click **Add to Component** in the window toolbar.

5 In the **Home** toolbar, click  **Add Material** to close the **Add Material** window.

## MESH 1

In the **Model Builder** window, under **Component 1 (comp1)** right-click **Mesh 1** and choose **Build All**.

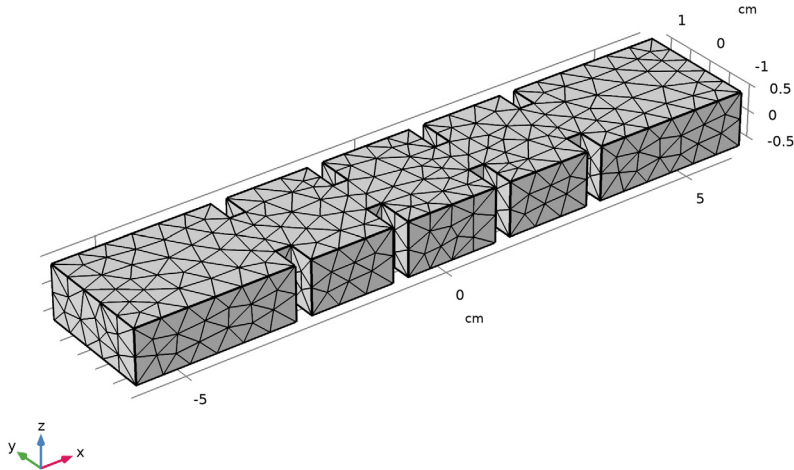

## STUDY 1

In the **Home** toolbar, click **Compute**.

## RESULTS

### *Electric Field (emw)*

The default plot shows the distribution of the norm of the electric field. Choose the center frequency of the passband.

- 1 In the **Settings** window for **3D Plot Group**, locate the **Data** section.
- 2 From the **Parameter value (freq (GHz))** list, choose **10**.
- 3 In the **Electric Field (emw)** toolbar, click **Plot**.

The resonant E-field should be observed in the cavities. Compare with [Figure 2](#).

### *S-parameter (emw)*


- 1 In the **Model Builder** window, click **S-parameter (emw)**.
- 2 In the **Settings** window for **ID Plot Group**, locate the **Legend** section.

3 From the **Position** list, choose **Lower right**.

4 In the **S-parameter (emw)** toolbar, click  **Plot**.

The resulting plot shows the S-parameters of the filter. Compare the plot with [Figure 3](#).

*Smith Plot (emw)*

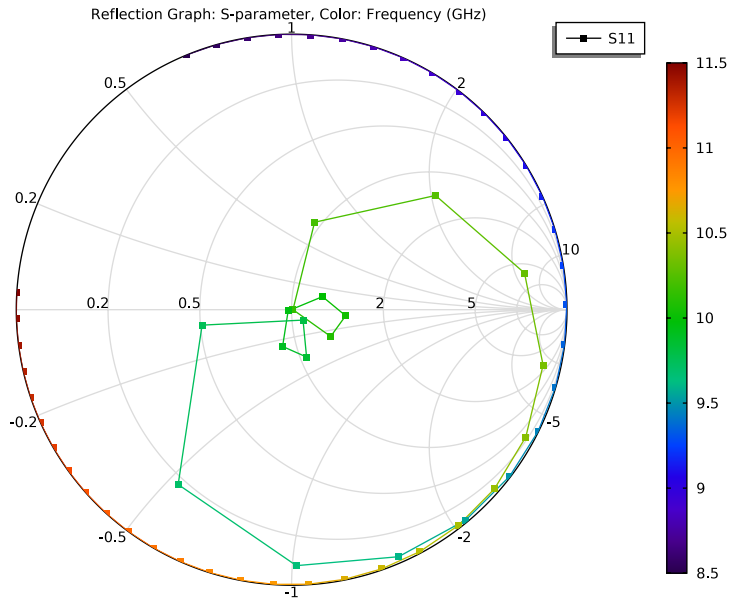

Analyze the same model with a Frequency Domain Modal method. When a device presents resonances, the **Frequency Domain Modal** method combined with an **Eigenfrequency** analysis provides a faster solution time.

#### ADD STUDY

1 In the **Home** toolbar, click  **Add Study** to open the **Add Study** window.

2 Go to the **Add Study** window.

3 Find the **Studies** subsection. In the **Select Study** tree, select **Preset Studies for Selected Physics Interfaces>Frequency Domain, Modal**.

4 Click **Add Study** in the window toolbar.

5 In the **Home** toolbar, click  **Add Study** to close the **Add Study** window.

## STUDY 2

### Step 1: Eigenfrequency

- 1 In the **Settings** window for **Eigenfrequency**, locate the **Study Settings** section.
- 2 In the **Search for eigenfrequencies around** text field, type 9.5[GHz].


### Step 2: Frequency Domain, Modal

- 1 In the **Model Builder** window, click **Step 2: Frequency Domain, Modal**.
- 2 In the **Settings** window for **Frequency Domain, Modal**, locate the **Study Settings** section.
- 3 In the **Frequencies** text field, type range(8.5[GHz],0.01[GHz],11.5[GHz]).


With a very fine frequency step simulation, the solutions contain a lot of data. As a result, the model file size will increase tremendously when it is saved. By selecting the Store fields in output check box in the Values of Dependent Variables section of the Frequency Domain study step settings, it is possible to define for what part of the model the computed solution should be saved. When only S-parameters are of interest, it is not necessary to store all of the field solutions. Instead, only store the field on the selections for the port boundaries, as those will be used for the S-parameter calculations.

## ELECTROMAGNETIC WAVES, FREQUENCY DOMAIN (EMW)

### Port 1

- 1 In the **Model Builder** window, under **Component 1 (comp1)>Electromagnetic Waves, Frequency Domain (emw)** click **Port 1**.
- 2 In the **Settings** window for **Port**, locate the **Boundary Selection** section.
- 3 Click  **Create Selection**.
- 4 In the **Create Selection** dialog box, type Port 1 in the **Selection name** text field.
- 5 Click **OK**.

### Port 2

- 1 In the **Model Builder** window, click **Port 2**.
- 2 In the **Settings** window for **Port**, locate the **Boundary Selection** section.
- 3 Click  **Create Selection**.
- 4 In the **Create Selection** dialog box, type Port 2 in the **Selection name** text field.
- 5 Click **OK**.

## STUDY 2

### *Step 2: Frequency Domain, Modal*

- 1 In the **Model Builder** window, under **Study 2** click **Step 2: Frequency Domain, Modal**.
- 2 In the **Settings** window for **Frequency Domain, Modal**, click to expand the **Values of Dependent Variables** section.
- 3 Find the **Store fields in output** subsection. From the **Settings** list, choose **For selections**.
- 4 Under **Selections**, click **+ Add**.
- 5 In the **Add** dialog box, in the **Selections** list, choose **Port 1** and **Port 2**.
- 6 Click **OK**.


It is necessary to include the port boundaries to calculate S-parameters. By choosing only the port boundaries for **Store fields in output** settings, it is possible to reduce the size of a model file a lot.

- 7 In the **Home** toolbar, click **= Compute**.

## RESULTS


### *Multislice*

- 1 In the **Model Builder** window, expand the **Electric Field (emw) 1** node, then click **Multislice**.
- 2 In the **Settings** window for **Multislice**, locate the **Multiplane Data** section.
- 3 Find the **X-planes** subsection. From the **Entry method** list, choose **Coordinates**.
- 4 In the **Coordinates** text field, type **-6 6**.
- 5 Find the **Y-planes** subsection. In the **Planes** text field, type **0**.
- 6 Find the **Z-planes** subsection. In the **Planes** text field, type **0**.

7 In the **Electric Field (emw) 1** toolbar, click  **Plot**.

freq(301)=11.5 GHz

Multislice: Electric field norm (V/m)

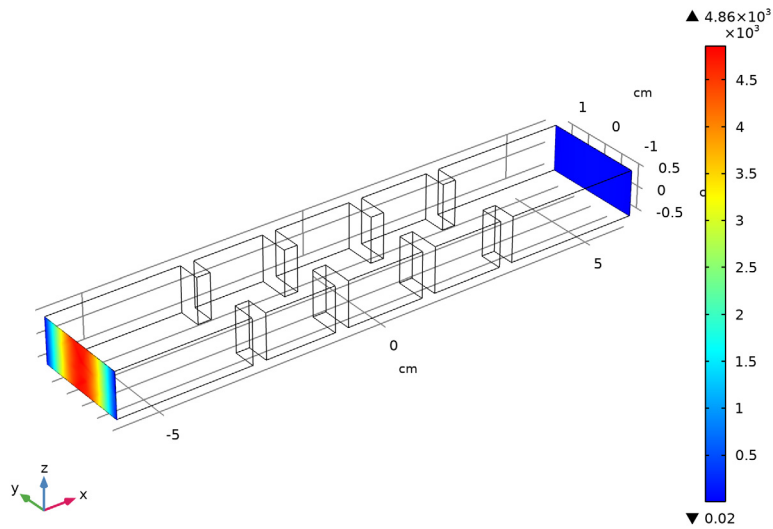


Since 11.5 GHz is not within the passband, the input power at the excitation port is not delivered to the observation port.

#### *Electric Field (emw) 1*


- 1 In the **Model Builder** window, click **Electric Field (emw) 1**.
- 2 In the **Settings** window for **3D Plot Group**, locate the **Data** section.
- 3 From the **Parameter value (freq (GHz))** list, choose **10**.



4 In the **Electric Field (emw) I** toolbar, click  **Plot**.

freq(151)=10 GHz

Multislice: Electric field norm (V/m)

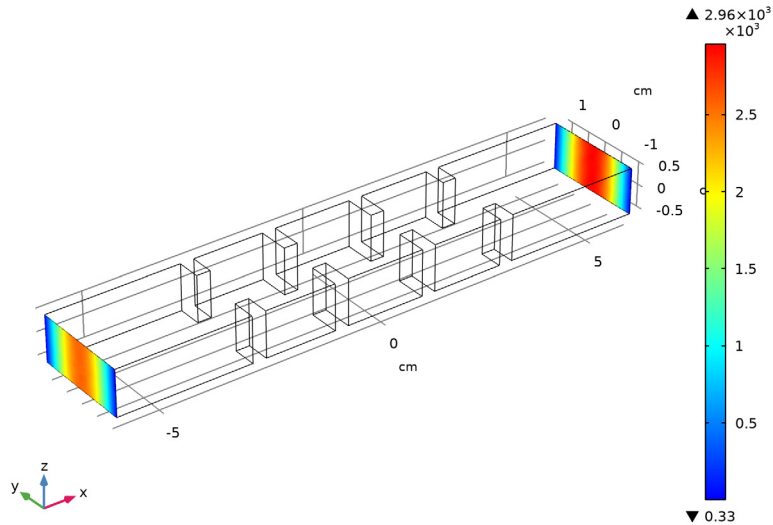

When the frequency of the plot is within the passband, the input power at the excitation port is delivered to the observation port.

Next, plot the calculated S-parameters from the Frequency Domain Modal method together with those of the discrete frequency sweep.

*S-parameter (emw) I*

- 1 In the **Model Builder** window, click **S-parameter (emw) I**.
- 2 In the **Settings** window for **ID Plot Group**, locate the **Legend** section.
- 3 From the **Position** list, choose **Lower right**.

*Global I*


- 1 In the **Model Builder** window, expand the **S-parameter (emw) I** node, then click **Global I**.
- 2 In the **Settings** window for **Global**, locate the **y-Axis Data** section.
- 3 In the table, enter the following settings:

Expression	Unit	Description
emw.S11dB	1	S11 Frequency Domain Modal
emw.S21dB	1	S21 Frequency Domain Modal

## Global 2

- 1 In the **Model Builder** window, right-click **S-parameter (emw) 1** and choose **Global**.
- 2 In the **Settings** window for **Global**, locate the **Data** section.
- 3 From the **Dataset** list, choose **Study 1/Solution 1 (sol1)**.
- 4 Click **Add Expression** in the upper-right corner of the **y-Axis Data** section. From the menu, choose **Component 1 (comp1)>Electromagnetic Waves, Frequency Domain>Ports>S-parameter, dB>emw.S11dB - S11**.
- 5 Click **Add Expression** in the upper-right corner of the **y-Axis Data** section. From the menu, choose **Component 1 (comp1)>Electromagnetic Waves, Frequency Domain>Ports>S-parameter, dB>emw.S21dB - S21**.
- 6 Locate the **y-Axis Data** section. In the table, enter the following settings:


Expression	Unit	Description
emw.S11dB	1	S11 Regular Sweep
emw.S21dB	1	S21 Regular Sweep

- 7 Click to expand the **Coloring and Style** section. Find the **Line style** subsection. From the **Line** list, choose **Dashed**.
- 8 Find the **Line markers** subsection. From the **Marker** list, choose **Circle**.
- 9 From the **Positioning** list, choose **In data points**.
- 10 In the **S-parameter (emw) 1** toolbar, click  **Plot**.

## S-parameter (emw) 1



- 1 In the **Model Builder** window, click **S-parameter (emw) 1**.
- 2 In the **Settings** window for **ID Plot Group**, click to expand the **Title** section.
- 3 From the **Title type** list, choose **Manual**.
- 4 In the **Title** text area, type S-parameter Comparison between Frequency Domain Modal and Regular Discrete Sweep.  
Compare the plot with [Figure 4](#).
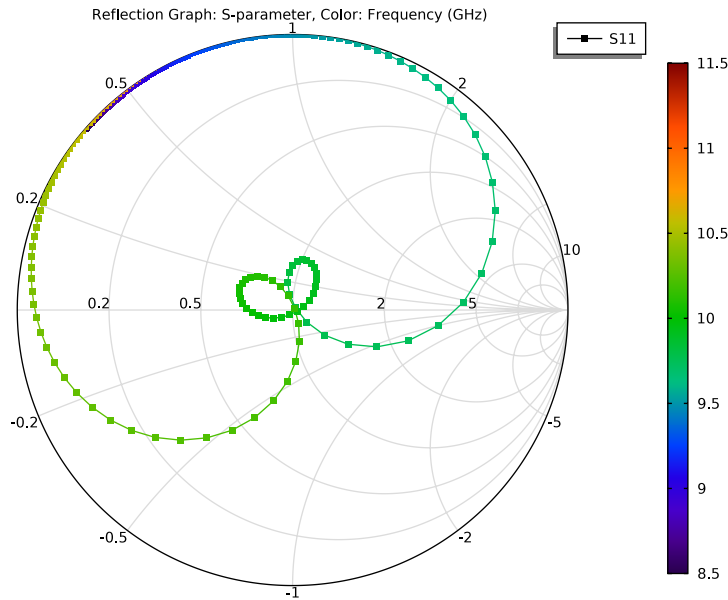
## Smith Plot (emw) 1



Analyze the same model with a finer frequency resolution using **Adaptive Frequency Sweep** based on asymptotic waveform evaluation (AWE). When a device presents a slowly varying frequency response, the AWE provides a faster solution time when running the simulation on many frequency points. The following example with the AWE can be computed five times faster than regular Frequency Domain sweeps with a same finer frequency resolution.



### ADD STUDY

- 1 In the **Home** toolbar, click  **Add Study** to open the **Add Study** window.
- 2 Go to the **Add Study** window.
- 3 Find the **Studies** subsection. In the **Select Study** tree, select **Preset Studies for Selected Physics Interfaces>Adaptive Frequency Sweep**.
- 4 Click **Add Study** in the window toolbar.
- 5 In the **Home** toolbar, click  **Add Study** to close the **Add Study** window.

### STUDY 3

#### Step 1: Adaptive Frequency Sweep

- 1 In the **Settings** window for **Adaptive Frequency Sweep**, locate the **Study Settings** section.

- 2 In the **Frequencies** text field, type range (8.5[GHz], 0.01[GHz], 11.5[GHz]).  
Use a five times finer frequency resolution.  
A slowly varying scalar value curve works well for AWE expressions. When **AWE expression type** is set to **Physics controlled** in the **Adaptive Frequency Sweep** study settings, `abs(comp1.emw.S21)` is used automatically for two-port devices.
- 3 Locate the **Values of Dependent Variables** section. Find the **Store fields in output** subsection. From the **Settings** list, choose **For selections**.
- 4 Under **Selections**, click  **Add**.
- 5 In the **Add** dialog box, in the **Selections** list, choose **Port 1** and **Port 2**.
- 6 Click **OK**.
- 7 In the **Home** toolbar, click  **Compute**.

## RESULTS

### *Electric Field (emw) 2*

- 1 In the **Settings** window for **3D Plot Group**, locate the **Data** section.
- 2 From the **Parameter value (freq (GHz))** list, choose **10**.


### *Multislice*

- 1 In the **Model Builder** window, expand the **Electric Field (emw) 2** node.
- 2 Right-click **Multislice** and choose **Delete**.

### *Surface 1*

In the **Model Builder** window, right-click **Electric Field (emw) 2** and choose **Surface**.

### *Selection 1*

- 1 In the **Model Builder** window, right-click **Surface 1** and choose **Selection**.
- 2 Select Boundaries 1 and 38 only.
- 3 In the **Electric Field (emw) 2** toolbar, click  **Plot**.

### *S-parameter (emw) 2*

- 1 In the **Model Builder** window, click **S-parameter (emw) 2**.
- 2 In the **Settings** window for **ID Plot Group**, locate the **Title** section.
- 3 From the **Title type** list, choose **Manual**.
- 4 In the **Title** text area, type S-parameter Comparison between Adaptive Frequency Sweep and Regular Discrete Sweep.
- 5 Locate the **Legend** section. From the **Position** list, choose **Lower right**.

### Global 1

- 1 In the **Model Builder** window, expand the **S-parameter (emw) 2** node, then click **Global 1**.
- 2 In the **Settings** window for **Global**, locate the **y-Axis Data** section.
- 3 In the table, enter the following settings:


Expression	Unit	Description
emw.S11dB	1	S11 Adaptive Frequency Sweep
emw.S21dB	1	S21 Adaptive Frequency Sweep


### Global 2

- 1 Right-click **Results>S-parameter (emw) 2>Global 1** and choose **Duplicate**.
- 2 In the **Settings** window for **Global**, locate the **y-Axis Data** section.
- 3 In the table, enter the following settings:

Expression	Unit	Description
emw.S11dB	1	S11 Regular Sweep
emw.S21dB	1	S21 Regular Sweep

- 4 Locate the **Data** section. From the **Dataset** list, choose **Study 1/Solution 1 (sol1)**.
- 5 Locate the **Coloring and Style** section. Find the **Line style** subsection. From the **Line** list, choose **Dotted**.
- 6 Find the **Line markers** subsection. From the **Marker** list, choose **Cycle**.
- 7 From the **Positioning** list, choose **In data points**.

8 In the **S-parameter (emw) 2** toolbar, click  **Plot**.

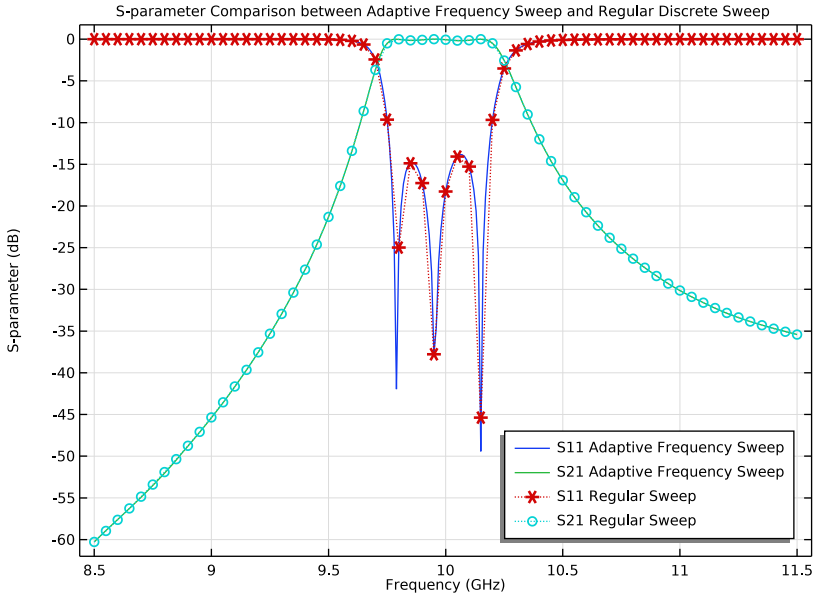

Smith Plot (emw) 2

