

Microfluidics Module

User's Guide

Microfluidics Module User's Guide

© 1998–2019 COMSOL

Protected by patents listed on www.comsol.com/patents, and U.S. Patents 7,519,518; 7,596,474; 7,623,991; 8,457,932; 8,954,302; 9,098,106; 9,146,652; 9,323,503; 9,372,673; 9,454,625; and 10,019,544. Patents pending.

This Documentation and the Programs described herein are furnished under the COMSOL Software License Agreement (www.comsol.com/comsol-license-agreement) and may be used or copied only under the terms of the license agreement.

COMSOL, the COMSOL logo, COMSOL Multiphysics, COMSOL Desktop, COMSOL Compiler, COMSOL Server, and LiveLink are either registered trademarks or trademarks of COMSOL AB. All other trademarks are the property of their respective owners, and COMSOL AB and its subsidiaries and products are not affiliated with, endorsed by, sponsored by, or supported by those trademark owners. For a list of such trademark owners, see www.comsol.com/trademarks.

Version: COMSOL 5.5

Contact Information

Visit the Contact COMSOL page at www.comsol.com/contact to submit general inquiries, contact Technical Support, or search for an address and phone number. You can also visit the Worldwide Sales Offices page at www.comsol.com/contact/offices for address and contact information.

If you need to contact Support, an online request form is located at the COMSOL Access page at www.comsol.com/support/case. Other useful links include:

- Support Center: www.comsol.com/support
- Product Download: www.comsol.com/product-download
- Product Updates: www.comsol.com/support/updates
- COMSOL Blog: www.comsol.com/blogs
- Discussion Forum: www.comsol.com/community
- Events: www.comsol.com/events
- COMSOL Video Gallery: www.comsol.com/video
- Support Knowledge Base: www.comsol.com/support/knowledgebase

Part number: CM021901

C o n t e n t s

Chapter 1: Introduction

About the Microfluidics Module	14
About Microfluidics	14
About the Microfluidics Module	15
The Microfluidics Module Physics Interface Guide	15
Coupling to Other Physics Interfaces	18
The Microfluidics Module Study Capabilities by Physics Interface.	19
Common Physics Interface and Feature Settings and Nodes	20
The Liquids and Gases Materials Database	21
Where Do I Access the Documentation and Application Libraries?	21
Overview of the User's Guide	25

Chapter 2: Microfluidic Modeling

Physics and Scaling in Microfluidics	28
Dimensionless Numbers in Microfluidics	31
Dimensionless Numbers Important for Solver Stability	31
Other Dimensionless Numbers	33
Modeling Microfluidic Fluid Flows	36
Selecting the Right Physics Interface.	36
Single-Phase Flow	37
Multiphase Flow	39
Porous Media Flow	40
The Relationship Between the Physics Interfaces	42
Modeling Coupled Phenomena in Microfluidics	44
Chemical Transport and Reactions	44
Electrohydrodynamics	46

Heat Transfer	53
Coupling to Other Physics Interfaces	55
Modeling Rarefied Gas Flows	56
The Flow Regimes	56
Slip Flow	57
References for the Theory of Microfluidics	58

Chapter 3: Single-Phase Flow Interfaces

The Laminar Flow and Creeping Flow Interfaces	60
The Creeping Flow Interface	60
The Laminar Flow Interface	61
Domain, Boundary, Pair, and Point Nodes for Single-Phase Flow	67
Fluid Properties	67
Volume Force	70
Initial Values	71
Wall	71
Inlet.	75
Outlet.	77
Symmetry	79
Open Boundary	80
Boundary Stress	80
Periodic Flow Condition	82
Interior Wall	83
Flow Continuity	85
Pressure Point Constraint	85
Point Mass Source	85
Line Mass Source.	86
Gravity	87
Theory for the Single-Phase Flow Interfaces	89
General Single-Phase Flow Theory	90
Compressible Flow	92
Weakly Compressible Flow	92
The Mach Number Limit	92

Incompressible Flow	93
The Reynolds Number.	94
Non-Newtonian Flow	95
Theory for the Wall Boundary Condition	97
Prescribing Inlet and Outlet Conditions	102
Mass Flow	104
Fully Developed Flow (Inlet)	105
Fully Developed Flow (Outlet).	107
No Viscous Stress	108
Normal Stress Boundary Condition.	108
Pressure Boundary Condition	109
Mass Sources for Fluid Flow	111
Numerical Stability — Stabilization Techniques for Fluid Flow	113
Solvers for Laminar Flow.	115
Pseudo Time Stepping for Laminar Flow Models	117
Discontinuous Galerkin Formulation	119
Particle Tracing in Fluid Flow	119
References for the Single-Phase Flow, Laminar Flow Interfaces	120

Chapter 4: Multiphase Flow, Two-Phase Flow Interfaces

The Laminar Two-Phase Flow, Level Set and Laminar Two-Phase Flow, Phase Field Interfaces	124
The Laminar Two-Phase Flow, Level Set Interface	124
The Two-Phase Flow, Level Set Coupling Feature	125
The Wetted Wall Coupling Feature.	128
The Interior Wetted Wall Coupling Feature	130
The Laminar Two-Phase Flow, Phase Field Interface	132
The Two-Phase Flow, Phase Field Coupling Feature.	133
Domain, Boundary, Point, and Pair Nodes for the Laminar Flow, Two-Phase, Level Set and Phase Field Interfaces.	136
The Laminar Three-Phase Flow, Phase Field Interface	138
The Laminar Three-Phase Flow, Phase Field Interface	138

The Three-Phase Flow, Phase Field Coupling Feature	139
Domain, Boundary, Point, and Pair Nodes for the Laminar Three-Phase Flow, Phase Field Interface	141
The Laminar Two-Phase Flow, Moving Mesh Interface	143
Select Laminar Flow Properties	144
Deforming Domain	144
Fluid-Fluid Interface	145
External Fluid Interface	147
Wall-Fluid Interface	148
Theory for the Level Set and Phase Field Interfaces	150
Level Set and Phase Field Equations	150
Conservative and Nonconservative Formulations	153
Phase Initialization	154
Numerical Stabilization	155
References for the Level Set and Phase Field Interfaces	156
Theory for the Three-Phase Flow, Phase Field Interface	157
Governing Equations of the Three-Phase Flow, Phase Field Interface	157
Reference for the Three-Phase Flow, Phase Field Interface	160
Theory for the Two-Phase Flow, Moving Mesh Interface	161
Domain Level Fluid Flow	161
About the Moving Mesh	162
About the Fluid Interface Boundary Conditions	163
Wall-Fluid Interface Boundary Conditions	167
References for the Two-Phase Flow, Moving Mesh Interface	168

Chapter 5: Mathematics, Moving Interfaces

The Level Set Interface	172
Domain, Boundary, and Pair Nodes for the Level Set Interface	174
Level Set Model	174
Initial Values	175
Inlet.	176

Initial Interface	176
No Flow	176
Thin Barrier.	177
Continuity	177
The Phase Field Interface	178
Domain, Boundary, and Pair Nodes for the Phase Field Interface.	179
Phase Field Model	180
Initial Values	181
Inlet.	182
Initial Interface.	182
Wetted Wall	182
Interior Wetted Wall	183
Continuity	183
The Ternary Phase Field Interface	185
Domain, Boundary, and Pair Nodes for the Ternary Phase Field	
Interface.	186
Mixture Properties	186
Initial Values	188
Inlet.	188
Outlet.	188
Symmetry	189
Wetted Wall	189
Theory for the Level Set Interface	191
The Level Set Method	191
Conservative and Nonconservative Form	193
Initializing the Level Set Function	194
Variables For Geometric Properties of the Interface	194
Reference for the Level Set Interface	195
Theory for the Phase Field Interface	196
About the Phase Field Method.	196
The Equations for the Phase Field Method	196
Conservative and Nonconservative Forms	198
Additional Sources of Free Energy	199
Initializing the Phase Field Function	199

Variables and Expressions	200
Reference for the Phase Field Interface	200
Theory for the Ternary Phase Field Interface	201
About the Phase Field Method.	201
The Equations of the Ternary Phase Field Method	201
Reference for the Ternary Phase Field Interface	203

Chapter 6: Porous Media Flow Interfaces

The Darcy's Law Interface	206
Domain, Boundary, Edge, Point, and Pair Nodes for the Darcy's Law Interface	208
Fluid and Matrix Properties	210
Mass Source	213
Initial Values	213
Storage Model	214
Richards' Equation Model	215
Poroelastic Storage	215
Gravity	215
Porous Electrode Coupling	216
Electrode Surface Coupling	217
Pressure	217
Mass Flux.	218
Line Mass Source.	218
Point Mass Source	219
Inlet.	219
Symmetry	220
No Flow	221
Flux Discontinuity	221
Outlet	222
Precipitation	222
Cross Section	222
Thickness.	223
Interior Wall	223
Thin Barrier.	223

Pressure Head	224
Hydraulic Head	224
Atmosphere/Gauge	224
Pervious Layer	225
Well	226
Fracture Flow	227
The Brinkman Equations Interface	228
Domain, Boundary, Point, and Pair Nodes for the Brinkman	
Equations Interface	230
Fluid and Matrix Properties	231
Mass Source	233
Volume Force	233
Initial Values	233
Fluid Properties	234
The Free and Porous Media Flow Interface	236
Domain, Boundary, Point, and Pair Nodes for the Free and Porous	
Media Flow Interface	237
Fluid Properties	238
Fluid and Matrix Properties	239
Mass Source	240
Volume Force	240
Initial Values	240
Microfluidic Wall Conditions	240
Wall	241
Theory for the Darcy's Law Interface	243
About Darcy's Law	243
Darcy's Law — Equation Formulation	244
Storage Model	245
Hydraulic Head, Pressure Head, and Elevation Head	246
Average Linear Velocity	247
Permeability Models and Non-Darcian Flow	247
References for the Darcy's Law Interface	251
Theory for the Brinkman Equations Interface	253
About the Brinkman Equations	253

Brinkman Equations Theory.	254
References for the Brinkman Equations Interface.	255

Theory for the Free and Porous Media Flow Interface	256
Reference for the Free and Porous Media Flow Interface.	256

Chapter 7: Rarefied Flow Interface

The Slip Flow Interface	258
Domain, Boundary, Edge, Point, and Pair Nodes for the Slip Flow Interface.	260
Fluid	261
External Slip Wall	262
Initial Values	263
Slip Wall	263
Periodic Condition	264
Symmetry	264
Interior Slip Wall.	264
Continuity	265
Theory for the Slip Flow Interface	266
Slip Flow Boundary Conditions	266
References for the Slip Flow Interface	268

Chapter 8: Chemical Species Transport Interfaces

The Transport of Diluted Species Interface	272
The Transport of Diluted Species in Porous Media Interface	276
Domain, Boundary, and Pair Nodes for the Transport of Diluted Species Interface.	278
Transport Properties	279
Turbulent Mixing	281
Initial Values	282
Mass-Based Concentrations.	282
Reactions.	282

No Flux	284
Inflow	284
Outflow	285
Concentration	285
Flux	286
Symmetry	287
Flux Discontinuity	287
Partition Condition	288
Periodic Condition	289
Line Mass Source.	289
Point Mass Source	290
Open Boundary	291
Thin Diffusion Barrier	291
Thin Impermeable Barrier	291
Equilibrium Reaction	292
Surface Reactions	293
Surface Equilibrium Reaction	293
Fast Irreversible Surface Reaction	293
Porous Electrode Coupling	294
Reaction Coefficients	294
Electrode Surface Coupling	295
Porous Media Transport Properties.	295
Adsorption	298
Partially Saturated Porous Media	299
Volatilization	302
Reactive Pellet Bed	303
Reactions (Reactive Pellet Bed)	305
Species Source.	306
Hygroscopic Swelling	307
Fracture	308
Theory for the Transport of Diluted Species Interface	309
Mass Balance Equation.	310
Equilibrium Reaction Theory	311
Convective Term Formulation.	313
Solving a Diffusion Equation Only	314
Mass Sources for Species Transport	314
Adding Transport Through Migration	316

Supporting Electrolytes	317
Crosswind Diffusion	318
Danckwerts Inflow Boundary Condition	319
Mass Balance Equation for Transport of Diluted Species in Porous Media	320
Convection in Porous Media	321
Diffusion in Porous Media	323
Dispersion	324
Adsorption	325
Reactions.	327
Mass Transport in Fractures	328
References	329

Chapter 9: Glossary

Glossary of Terms	332
--------------------------	------------

Introduction

This guide describes the Microfluidics Module, an optional add-on package that extends the COMSOL Multiphysics® modeling environment with customized physics interfaces for microfluidics.

This chapter introduces you to the capabilities of this module. A summary of the physics interfaces and where you can find documentation and model examples is also included. The last section is a brief overview with links to each chapter in this guide.

In this chapter:

- [About the Microfluidics Module](#)
- [Overview of the User's Guide](#)

About the Microfluidics Module

In this section:

- [About Microfluidics](#)
- [About the Microfluidics Module](#)
- [The Microfluidics Module Physics Interface Guide](#)
- [Coupling to Other Physics Interfaces](#)
- [The Microfluidics Module Study Capabilities by Physics Interface](#)
- [Common Physics Interface and Feature Settings and Nodes](#)
- [The Liquids and Gases Materials Database](#)
- [Where Do I Access the Documentation and Application Libraries?](#)

About Microfluidics

The field of *microfluidics* evolved as engineers and scientists explored new avenues to make use of the fabrication technologies developed by the microelectronics industry. These technologies enabled complex micron and submicron structures to be integrated with electronic systems and batch fabricated at low cost. Mechanical devices fabricated using these technologies have become known as microelectromechanical systems (MEMS), whilst fluidic devices are commonly referred to as microfluidic systems or “lab-on-a-chip” devices. A proper description of these microsystems usually requires multiple physical effects to be incorporated.

At the microscale different physical effects become important to those dominant at macroscopic scales. Properties that scale with the volume of the system (such as inertia) become comparatively less important than those that scale with the surface area of the system (such as viscosity and surface tension). Fluid flow is therefore usually laminar and chemical migration is often limited by diffusion. Electrokinetic effects become important as the electric double layers present at interfaces in the system interact with external applied fields. As systems are further miniaturized, the mean free path of the fluid can become comparable to the size of the system and rarefaction effects become important. At moderate Knudsen numbers (the Knudsen number is the ratio of the mean free path to the system size), it is still possible to use the Navier-Stokes equations to solve the flow; however, special slip boundary conditions are required.

Research activity in microfluidics is changing medical-diagnostic processes such as DNA analysis, and it is spurring the development of successful commercial products.

Tools to address the flow of fluids within porous media are also included as well as a physics interface to model moderately rarefied gas flows (the Slip Flow interface).

About the Microfluidics Module

The Microfluidics Module is a collection of tailored physics interfaces for the simulation of microfluidic devices. It has a range of tools to address the specific challenges of modeling micro- and nanoscale flows.

Physics interfaces that address laminar flow, multiphase flow, flow in porous media, and moderately rarefied flow (the Slip Flow interface) are available. Enhanced capabilities to treat chemical reactions between dilute species are also included. COMSOL Multiphysics also has tools to model the transport and reactions of concentrated species, but the Chemical Reaction Engineering Module is required for these physics interfaces. In addition to the standard tools for modeling fluid flow, interfaces between fluids can be modeled by the Level Set, Phase Field, and Moving Mesh interfaces, making it possible to model surface tension and multiphase flow at the microscale.

The Microfluidics Module Applications Libraries and supporting documentation explain how to use the physics interfaces to model a range of microfluidic devices.

















The Microfluidics Module Physics Interface Guide














The physics interfaces in the Microfluidics Module form a complete set of simulation tools, which extends the functionality of the physics interfaces of the base package for COMSOL Multiphysics. The details of the physics interfaces and study types for the Microfluidics Module are listed in the table. The functionality of the COMSOL Multiphysics base package is given in the *COMSOL Multiphysics Reference Manual*.



In the *COMSOL Multiphysics Reference Manual*:

- [Studies and Solvers](#)
 - [The Physics Interfaces](#)
 - For a list of all the core physics interfaces included with a COMSOL Multiphysics license, see [Physics Interface Guide](#).
-

PHYSICS INTERFACE	ICON	TAG	SPACE DIMENSION	AVAILABLE STUDY TYPE
 Chemical Species Transport				
Transport of Diluted Species ¹		tds	all dimensions	stationary; time dependent
Transport of Diluted Species in Porous Media		tds	all dimensions	stationary; time dependent
 Reacting Flow				
Laminar Flow, Diluted Species ¹		—	3D, 2D, 2D axisymmetric	stationary; time dependent
 Fluid Flow				
 Single-Phase Flow				
Creeping Flow		spf	3D, 2D, 2D axisymmetric	stationary; time dependent
Laminar Flow ¹		spf	3D, 2D, 2D axisymmetric	stationary; time dependent
 Multiphase Flow				
 <i>Two-Phase Flow, Level Set</i>				
Laminar Two-Phase Flow, Level Set		—	3D, 2D, 2D axisymmetric	time dependent with phase initialization
 <i>Two-Phase Flow, Phase Field</i>				
Laminar Two-Phase Flow, Phase Field		—	3D, 2D, 2D axisymmetric	time dependent with phase initialization
 <i>Three-Phase Flow, Phase Field</i>				
Laminar, Three-Phase Flow, Phase Field		—	3D, 2D, 2D axisymmetric	time dependent

PHYSICS INTERFACE	ICON	TAG	SPACE DIMENSION	AVAILABLE STUDY TYPE
 Two-Phase Flow, Moving Mesh				
Laminar Two-Phase Flow, Moving Mesh		—	3D, 2D, 2D axisymmetric	time dependent
 Porous Media and Subsurface Flow				
Brinkman Equations		br	3D, 2D, 2D axisymmetric	stationary; time dependent
Darcy's Law		dl	all dimensions	stationary; time dependent
Free and Porous Media Flow		fp	3D, 2D, 2D axisymmetric	stationary; time dependent
 Rarefied Flow				
Slip Flow		slpf	3D, 2D, 2D axisymmetric	stationary; time dependent
 Mathematics				
 Moving Interface				
Level Set		ls	all dimensions	time dependent with phase initialization
Phase Field		pf	all dimensions	time dependent; time dependent with phase initialization
Ternary Phase Field		terpf	3D, 2D, 2D axisymmetric	time dependent
¹ This physics interface is included with the core COMSOL package but has added functionality for this module.				

Coupling to Other Physics Interfaces

The Microfluidics Module connects to COMSOL Multiphysics and other add-on modules in the COMSOL Multiphysics product line. [Table 2-1](#) summarizes the most important microfluidics couplings and other common devices you can model.

The *Microfluidics* column lists transport phenomena that are key issues in, for example, lab-on-a-chip type devices.

This list is only the tip of the iceberg — an overview of the most important applications where you can use the Microfluidics Module. In your hands, the multiphysics combinations and applications are unlimited.

TABLE 2-1: EXAMPLES OF COUPLED PHENOMENA AND DEVICES YOU CAN MODEL USING THE MICROFLUIDICS MODULE

	MICROFLUIDICS
PHENOMENA/ COUPLING	Pressure-driven flow Chemical Reactions in two-phase flow Dielectrophoresis Electroosmotic flow Electrophoresis Electrothermal flow Electrowetting Magnetophoresis Mass transport using diffusion, migration, and convection Slip Flow
DEVICES	Lab-on-a-chip devices Microfluidic channels Microreactors Micromixers MEMS heat exchangers Nonmechanical pumps and valves

The Microfluidics Module Study Capabilities by Physics Interface

Table 2-2 lists the Preset Studies available for each physics interface specific to this module.



	<p>When using the axisymmetric interfaces, the horizontal axis represents the r direction and the vertical axis the z direction. The geometry must be created in the right half plane (that is, only for positive r).</p>
	<p>Studies and Solvers in the <i>COMSOL Multiphysics Reference Manual</i></p>

TABLE 2-2: MICROFLUIDICS MODULE DEPENDENT VARIABLES AND PRESET STUDY AVAILABILITY

PHYSICS INTERFACE	NAME	DEPENDENT VARIABLES	PRESET STUDIES*		
			STATIONARY	TIME DEPENDENT	TRANSIENT WITH INITIALIZATION
CHEMICAL SPECIES TRANSPORT					
Transport of Diluted Species	tds	c	√	√	
Transport of Diluted Species in Porous Media	tds	c	√	√	
FLUID FLOW>RAREFIED FLOW					
Slip Flow	slpf	u, v, w, p, T	√	√	
FLUID FLOW>SINGLE-PHASE FLOW					
Laminar Flow	spf	u, v, w, p	√	√	
Creeping Flow	spf	u, v, w, p	√	√	
FLUID FLOW>MULTIPHASE FLOW					
Laminar Two-Phase Flow, Level Set	tpf	u, v, w, p, ϕ			√

TABLE 2-2: MICROFLUIDICS MODULE DEPENDENT VARIABLES AND PRESET STUDY AVAILABILITY

PHYSICS INTERFACE	NAME	DEPENDENT VARIABLES	PRESET STUDIES*		
			STATIONARY	TIME DEPENDENT	TRANSIENT WITH INITIALIZATION
Laminar Two-Phase Flow, Phase Field	tpf	u, v, w, p, ϕ, ψ			√
Laminar Two-Phase Flow, Moving Mesh	spf	u, v, w, p		√	
FLUID FLOW>POROUS MEDIA AND SUBSURFACE FLOW					
Brinkman Equations	br	u, v, w, p	√	√	
Darcy's Law	dl	u, v, w, p	√	√	
Free and Porous Media Flow	fp	u, v, w, p	√	√	
MATHEMATICS					
Level Set	ls	ϕ			√
Phase Field	pf	ϕ, ψ			√

* Custom studies are also available based on the physics interface.

Common Physics Interface and Feature Settings and Nodes

There are several common settings and sections available for the physics interfaces and feature nodes. Some of these sections also have similar settings or are implemented in the same way no matter the physics interface or feature being used. There are also some physics feature nodes that display in COMSOL Multiphysics.

In each module's documentation, only unique or extra information is included; standard information and procedures are centralized in the *COMSOL Multiphysics Reference Manual*.



In the *COMSOL Multiphysics Reference Manual* see [Table 2-4](#) for links to common sections and [Table 2-5](#) to common feature nodes. You can also search for information: press F1 to open the **Help** window or Ctrl+F1 to open the **Documentation** window.

The Liquids and Gases Materials Database

The Microfluidics Module includes an additional **Liquids and Gases** material database with temperature-dependent fluid dynamic and thermal properties.



For detailed information about materials and the [Liquids and Gases Materials Database](#), see [Materials](#) in the *COMSOL Multiphysics Reference Manual*.

Where Do I Access the Documentation and Application Libraries?

A number of internet resources have more information about COMSOL, including licensing and technical information. The electronic documentation, topic-based (or context-based) help, and the application libraries are all accessed through the COMSOL Desktop.




If you are reading the documentation as a PDF file on your computer, the [blue links](#) do not work to open an application or content referenced in a different guide. However, if you are using the Help system in COMSOL Multiphysics, these links work to open other modules, application examples, and documentation sets.



THE DOCUMENTATION AND ONLINE HELP


The *COMSOL Multiphysics Reference Manual* describes the core physics interfaces and functionality included with the COMSOL Multiphysics license. This book also has instructions about how to use COMSOL Multiphysics and how to access the electronic Documentation and Help content.

Opening Topic-Based Help


The Help window is useful as it is connected to the features in the COMSOL Desktop. To learn more about a node in the Model Builder, or a window on the Desktop, click to highlight a node or window, then press F1 to open the Help window, which then


displays information about that feature (or click a node in the Model Builder followed by the **Help** button (). This is called *topic-based* (or *context*) *help*.

Win	<p>To open the Help window:</p> <ul style="list-style-type: none">• In the Model Builder, Application Builder, or Physics Builder click a node or window and then press F1.• On any toolbar (for example, Home, Definitions, or Geometry), hover the mouse over a button (for example, Add Physics or Build All) and then press F1.• From the File menu, click Help ().• In the upper-right corner of the COMSOL Desktop, click the Help () button.
-----	--

Mac	<p>To open the Help window:</p> <ul style="list-style-type: none">• In the Model Builder or Physics Builder click a node or window and then press F1.• On the main toolbar, click the Help () button.• From the main menu, select Help>Help.
Linux	

Opening the Documentation Window

Win	<p>To open the Documentation window:</p> <ul style="list-style-type: none">• Press Ctrl+F1.• From the File menu select Help>Documentation ().
-----	---

Mac	<p>To open the Documentation window:</p> <ul style="list-style-type: none">• Press Ctrl+F1.• On the main toolbar, click the Documentation () button.• From the main menu, select Help>Documentation.
Linux	

THE APPLICATION LIBRARIES WINDOW

Each model or application includes documentation with the theoretical background and step-by-step instructions to create a model or application. The models and applications are available in COMSOL Multiphysics as MPH files that you can open for further investigation. You can use the step-by-step instructions and the actual models as templates for your own modeling. In most models, SI units are used to describe the relevant properties, parameters, and dimensions, but other unit systems are available.

Once the Application Libraries window is opened, you can search by name or browse under a module folder name. Click to view a summary of the model or application and its properties, including options to open it or its associated PDF document.





[The Application Libraries Window](#) in the *COMSOL Multiphysics Reference Manual*.

Opening the Application Libraries Window

To open the **Application Libraries** window ():




- From the **Home** toolbar, **Windows** menu, click () **Applications Libraries**.
- From the **File** menu select **Application Libraries**.

To include the latest versions of model examples, from the **File>Help** menu, select () **Update COMSOL Application Library**.



Select **Application Libraries** from the main **File>** or **Windows>** menus.



To include the latest versions of model examples, from the **Help** menu select () **Update COMSOL Application Library**.

CONTACTING COMSOL BY EMAIL

For general product information, contact COMSOL at info@comsol.com.

COMSOL ACCESS AND TECHNICAL SUPPORT

To receive technical support from COMSOL for the COMSOL products, please contact your local COMSOL representative or send your questions to

support@comsol.com. An automatic notification and a case number are sent to you by email. You can also access technical support, software updates, license information, and other resources by registering for a COMSOL Access account.

COMSOL ONLINE RESOURCES

COMSOL website	www.comsol.com
Contact COMSOL	www.comsol.com/contact
COMSOL Access	www.comsol.com/access
Support Center	www.comsol.com/support
Product Download	www.comsol.com/product-download
Product Updates	www.comsol.com/support/updates
COMSOL Blog	www.comsol.com/blogs
Discussion Forum	www.comsol.com/community
Events	www.comsol.com/events
COMSOL Video Gallery	www.comsol.com/video
Support Knowledge Base	www.comsol.com/support/knowledgebase

Overview of the User's Guide

The *Microfluidics Module User's Guide* gets you started with modeling microfluidic systems using COMSOL Multiphysics. The information in this guide is specific to this module. Instructions how to use COMSOL Multiphysics in general are included with the *COMSOL Multiphysics Reference Manual*.



As detailed in the section [Where Do I Access the Documentation and Application Libraries?](#) this information can also be searched from the COMSOL Multiphysics software **Help** menu.

TABLE OF CONTENTS, GLOSSARY, AND INDEX

To help you navigate through this guide, see the [Contents](#), [Glossary](#), and [Index](#).

MODELING IN MICROFLUIDICS

The [Microfluidic Modeling](#) chapter familiarizes you with modeling procedures useful when working with this module. Topics include [Dimensionless Numbers in Microfluidics](#), [Modeling Microfluidic Fluid Flows](#), [Modeling Coupled Phenomena in Microfluidics](#), and [Modeling Rarefied Gas Flows](#).

THE FLUID FLOW BRANCH INTERFACES

There are several fluid flow interfaces available. The various types of momentum transport that you can simulate includes laminar and creeping flow, multiphase two-phase flow, and flow in porous media. Every section describes the applicable physics interfaces in detail and concludes with the underlying interface theory.

Single-Phase Flow

[Single-Phase Flow Interfaces](#) chapter describes the Laminar Flow and Creeping Flow interfaces.

Multiphase Flow Two-Phase Flow

[Multiphase Flow, Two-Phase Flow Interfaces](#) chapter describes the Laminar Flow, Two-Phase Flow Level Set and Phase Field interfaces as well as the Laminar Flow, Two-Phase Flow, Moving Mesh interface. Some multiphase flow is described using the Phase Field and Level Set interfaces found under [Mathematics, Moving Interfaces](#) branch. In this module, these physics are already integrated into the relevant physics interfaces.

Porous Media and Subsurface Flow

[Porous Media Flow Interfaces](#) chapter describes the Darcy's Law, Brinkman Equations, and Free and Porous Media Flow interfaces.

Rarefied Flow

[Rarefied Flow Interface](#) chapter describes the Slip Flow interface, including the underlying theory.

THE CHEMICAL SPECIES TRANSPORT BRANCH INTERFACES

The transport and conversion of material is denoted as chemical species transport.

[Chemical Species Transport Interfaces](#) chapter describes the Transport of Diluted Species and the Transport of Diluted Species in Porous Media as well as the underlying theory.

Microfluidic Modeling

This chapter gives an overview of the physics interfaces available for modeling microfluidic flows and provides guidance on choosing the appropriate physics interface for a specific problem.

In this chapter:

- [Physics and Scaling in Microfluidics](#)
- [Dimensionless Numbers in Microfluidics](#)
- [Modeling Microfluidic Fluid Flows](#)
- [Modeling Coupled Phenomena in Microfluidics](#)
- [Modeling Rarefied Gas Flows](#)

Physics and Scaling in Microfluidics

Microfluidic flows occur on length scales that are orders of magnitude smaller than macroscopic flows. Manipulation of fluids at the microscale has a number of advantages — typically microfluidic systems are smaller, operate faster, and require less fluid than their macroscopic equivalents. Energy inputs and outputs are also easier to control (for example, heat generated in a chemical reaction) because the surface-to-area volume ratio of the system is much greater than that of a macroscopic system.

In general, as the length scale (L) of the fluid flow is reduced, properties that scale with the surface area of the system become comparatively more important than those that scale with the volume of the flow (see [Table 3-1](#)). This is apparent in the fluid flow itself as the viscous forces, which are generated by shear over the isovelocity surfaces (scaling as L^2), dominate over the inertial forces (which scale volumetrically as L^3). The Reynolds number (Re), which characterizes the ratio of these two forces, is typically low, so the flow is laminar. In many cases the creeping (Stokes) flow regime applies ($Re \ll 1$). The section [Single-Phase Flow](#) describes microfluidic fluid flows in greater detail.

When multiple phases are present surface tension effects become important relative to gravity and inertia at small length scales. The Laplace pressure, capillary force, and Marangoni forces all scale as $1/L$. The section [Multiphase Flow](#) gives more information on modeling flows involving several phases.

Flow through porous media can also occur on microscale geometries. Because the permeability of a porous media scales as L^2 (where L is the average pore radius) the flow is often friction dominated when the pore size is in the micron range and Darcy's law can be used. For intermediate flows this module also provides a physics interface to model flows where Brinkman equation is appropriate. For more information see [Porous Media Flow](#).

At the microscale, a range of electrohydrodynamic effects can be used to influence the fluid flow. The electric field strength for a given applied voltage scales as $1/L$, making it easier to apply relatively large fields to the fluid with moderate voltages. In electroosmosis the uncompensated ions in the charged electric double layer (EDL) present on the fluid surfaces are moved by an electric field, causing a net fluid flow. Electrophoretic and dielectrophoretic forces on charged or polarized particles in the fluid can be used to induce particle motion, as can diamagnetic forces in the case of

magnetophoresis. The manipulation of contact angles by the electrowetting phenomena is also easy in microscale devices. The section [Electrohydrodynamics](#) explains how to model these phenomena in detail.

TABLE 3-1: SCALING OF VARIOUS PHYSICAL PHENOMENA WITH LENGTH (L) AND THE CONSEQUENCES FOR MICROFLUIDIC DEVICES

PROPERTY	LENGTH SCALING	CONSEQUENCES
Volume	L^3	Surface related properties increase in importance relative to volumetric properties, Surface area to volume ratios are high.
Area	L^2	
Inertial Forces	L^3	Viscosity dominates over inertia, flow is laminar or creeping. Absence of convection makes mixing difficult.
Viscous Forces	L^2	
Laplace Pressure	L^{-1}	Surface tension effects become dominant in two phase flows.
Capillary Force	L^{-1}	
Permeability of Porous media	L^2	Darcy's law usually applies.
Diffusion Time Scale	L^2	Diffusive mixing possible (although still much slower than convection).
Electric Field (at constant applied voltage)	L^{-1}	Possibility of using a range of electrokinetic effects to drive the flow.
Knudsen Number	L^{-1}	Microscale gas flows are usually rarefied.

Laminar flows make mixing particularly difficult, so mass transport is often diffusion limited. The diffusion time scales as L^2 , but even in microfluidic systems diffusion is often a slow process. This has implications for chemical transport and hence reactions within microfluidic systems. [Chemical Transport and Reactions](#) describes how to model diffusion-based transport and chemical reactions in microfluidics.

As the length scale of the flow becomes comparable to intermolecular length scale, more complex kinetic effects become important. For gases the ratio of the molecular mean free path to the flow geometry size is given by the Knudsen number (Kn). Clearly, Kn scales as $1/L$. For $\text{Kn} < 0.01$, fluid flow is usually well described by the Navier-Stokes equations with no-slip boundary conditions. In the slip flow regime ($0.01 < \text{Kn} < 0.1$) appropriate slip boundary conditions can be used with the Navier-Stokes equations to describe the flow away from the boundary (see [Slip Flow](#)). At Knudsen numbers above 0.1 a fully kinetic approach is required. Flows in this regime can be modeled using tools from the Molecular Flow Module.

The next section describes the importance of [Dimensionless Numbers in Microfluidics](#), which are frequently used in transport equations.



The Free Molecular Flow and Transitional Flow interfaces are available in the Molecular Flow Module.



[The Physics Interfaces](#) and [Building a COMSOL Multiphysics Model](#) in the *COMSOL Multiphysics Reference Manual*

Dimensionless Numbers in Microfluidics

Information about the dominant physics in a microfluidics problem is contained in many of the dimensionless numbers that are used to characterize the flow. When using the finite element method, dimensionless numbers defined on the element or “cell” level can contain important information about the numerical stability of the problem (the term “cell” is carried over from the finite volume method in this context). This section includes information about the dimensionless numbers that are relevant to microfluidic flows.

In this section:

- [Dimensionless Numbers Important for Solver Stability](#)
- [Other Dimensionless Numbers](#)

Dimensionless Numbers Important for Solver Stability

When solving a microfluidics problem numerically there are two critical dimensionless numbers to consider in terms of solver stability. These numbers are:

- The Reynolds number (Re)
- The Peclet number (Pe)

Each of these numbers is defined in [Table 3-2](#). Both the Reynolds number and the Peclet number are associated with the relative importance of convective terms in the corresponding partial differential equation. The *Peclet number* describes the importance of convection in relation to diffusion (for either heat or mass transfer), and the *Reynolds number* describes the importance of the “convective” inertia term in relation to viscosity in the Navier-Stokes equations themselves.


Both the Reynolds number and the Peclet number can be defined on the “cell” or element level. As they are defined in COMSOL Multiphysics numerical instabilities can arise when the cell Reynolds or Peclet number is greater than one. These instabilities are usually manifested as spurious oscillations in the solution. Taking the Peclet

number as an example, oscillations can occur when the cell Peclet number is greater than one in the following circumstances:

- A Dirichlet boundary condition can lead to a solution containing a steep gradient near the boundary, forming a boundary layer. If the mesh cannot resolve the boundary layer, this creates a local disturbance.
- A space-dependent initial condition that the mesh does not resolve can cause a local initial disturbance that propagates through the computational domain.
- A small initial diffusion term close to a nonconstant source term or a nonconstant Dirichlet boundary condition can result in a local disturbance.

In theory the grid can be refined to bring the cell Reynolds or Peclet number below one, although this is often impractical for many problems. Several stabilization techniques are included, which enable problems with larger cell Reynolds or Peclet numbers to be solved. At the crudest level additional numerical diffusion can be added to the problem to improve its stability. This is achieved by selecting **Isotropic Diffusion** under **Inconsistent Stabilization** for any physics interface.



The stabilization options are visible when the **Show More Options** button () is clicked and **Stabilization** is selected in the **Show More Options** dialog box.

This method is termed “inconsistent” as a solution to the problem without numerical diffusion is not necessarily a solution to the problem with diffusion. COMSOL Multiphysics also has consistent stabilization options. A consistent stabilization technique reduces the numerical diffusion added to the problem as the solution approaches the exact solution. Both streamline diffusion and crosswind diffusion are available. Streamline diffusion adds numerical diffusion along the direction of the flow velocity (that is, the diffusion is parallel to the streamlines). Crosswind diffusion adds diffusion in the direction orthogonal to the velocity.

Generally it is best to use consistent stabilization where possible. If convergence problems are still encountered, inconsistent stabilization can be used with a parametric or time-dependent solver that slowly eliminates this term.



- [Override and Contribution and Numerical Stabilization in the COMSOL Multiphysics Reference Manual](#)
 - [Other Dimensionless Numbers](#)
-

TABLE 3-2: IMPORTANT DIMENSIONLESS NUMBERS RELATED TO THE STABILITY OF VARIOUS MICROFLUIDIC PROBLEMS.

DIMENSIONLESS NUMBER	SYMBOL	GLOBAL DEFINITION	CELL DEFINITION	NOTES
Reynolds number	Re	$Re = \frac{\rho v L}{\mu}$	$Re^c = \frac{\rho v h}{2\mu}$ spf.cellRe	Ratio of inertial forces to viscous forces. Laminar flow applies: $Re < 10^3$ Creeping flow applies: $Re \ll 1$ Stabilization required: $Re^c > 1$
Peclet number (Heat Flow)	Pe	$Pe = \frac{\rho c_p v L}{\kappa}$	$Pe^c = \frac{\rho c_p v h}{2\kappa}$ spf.cellPe	Ratio of heat convection to thermal diffusivity, $\alpha = \kappa / (\rho c_p)$. Stabilization required: $Pe^c > 1$
Peclet number (Mass Transport)	Pe	$Pe = \frac{v L}{D}$	$Pe^c = \frac{v h}{2D}$	Ratio of concentration convection to diffusion. Stabilization required: $Pe^c > 1$

Symbol definitions: v is the characteristic velocity or cell velocity, ρ is the fluid density, L is the characteristic length scale for the problem, μ is the fluid viscosity, h is the element size, c_p is the heat capacity at constant pressure, κ is the thermal conductivity, and D is the diffusion constant. For anisotropic diffusion or conductivity an appropriate average is computed. The variables names assume the default name spf.

Other Dimensionless Numbers

A number of other dimensionless numbers are useful for describing fluid flows on the microscale. These numbers are summarized in [Table 3-3](#).

TABLE 3-3: DIMENSIONLESS NUMBERS USEFUL FOR CHARACTERIZING MICROFLUIDIC FLOWS.

DIMENSION LESS NUMBER	SYMBOL	DEFINITION	NOTES
Bond number/ Eötvös number	Bo Eo	$\left. \begin{matrix} \text{Bo} \\ \text{Eo} \end{matrix} \right\} = \frac{\rho g L^2}{\sigma}$	Ratio of surface tension forces to body forces (usually gravity) for two-phase flow. Density can refer to density difference when considering buoyancy. At high Bond numbers surface tension has a minimal effect on the flow, ($\text{Bo} \gg 1$), at low Bond numbers, surface tension dominates ($\text{Bo} < 1$).
Capillary number	Ca	$\text{Ca} = \frac{\mu v}{\sigma}$	Ratio of viscous forces to surface tension for two phase flow. At low capillary numbers ($\text{Ca} < 10^{-5}$) flow in porous media is dominated by surface tension.
Dukhin number	Du	$\text{Du} = \frac{K^\sigma}{K^B}$	Ratio of the surface conductivity contribution to the fluid bulk electrical conductivity contribution in electrokinetic phenomena. For low Dukhin numbers ($\text{Du} \ll 1$), surface conductivities can be neglected when modeling electrokinetic flows.
Knudsen number	Kn	$\text{Kn} = \frac{\lambda}{L}$	Ratio of the gas mean free path to the characteristic length scale. Continuum flow occurs when $\text{Kn} < 0.01$, slip flow occurs in the range $0.01 < \text{Kn} < 0.1$, transitional flow occurs in the range $0.1 < \text{Kn} < 10$ and Free Molecular Flow occurs when $\text{Kn} > 10$. For more details see Modeling Rarefied Gas Flows .
Mach number	Ma	$\text{Ma} = \frac{v}{\alpha}$	Ratio of the convective speed to the speed of sound in the medium. The Laminar Flow interface in the Microfluidics Module can handle compressible flows with $\text{Ma} < 0.3$. For higher Mach number flows the CFD Module is required.

Symbol definitions: ρ is the fluid density, g is the body force acceleration (usually the acceleration due to gravity), L is the characteristic length scale for the problem, σ is the surface tension coefficient, μ is the fluid viscosity, v is the characteristic velocity, K^σ is the surface conductivity, K^B is the bulk conductivity, λ is the mean free path, α is the thermal diffusivity ($\alpha = \kappa / (\rho c_p)$), c_p is the heat capacity at constant pressure, κ is the thermal conductivity, and T is the absolute temperature (ΔT is the characteristic temperature difference).

TABLE 3-3: DIMENSIONLESS NUMBERS USEFUL FOR CHARACTERIZING MICROFLUIDIC FLOWS.

DIMENSION LESS NUMBER	SYMBOL	DEFINITION	NOTES
<i>Marangoni number</i>	Mg	$Mg = \frac{d\sigma L \Delta T}{dT \mu \alpha}$	Ratio of thermal surface tension forces to viscous forces. In the low Marangoni number range ($Mg \ll 1000$) viscous forces dominate over surface tension gradients.
<i>Ohnesorge /Laplace /Surataman numbers</i>	Oh La Su	$Oh = \frac{\mu}{\sqrt{\rho \sigma L}}$ $\left. \begin{matrix} La \\ Su \end{matrix} \right\} = \frac{1}{Oh^2}$	Relates the inertial and surface tension forces to the viscous forces. Used to describe the breakup of liquid jets and sheets: at low Ohnesorge and Reynolds numbers the Rayleigh instability occurs, at high Ohnesorge and Reynolds numbers atomization occurs.
<i>Weber number</i>	We	$We = \frac{\rho v^2 L}{\sigma}$	Ratio of inertial forces to surface tension forces. For small Weber numbers ($We \ll 1$) surface tension dominates the flow.

Symbol definitions: ρ is the fluid density, g is the body force acceleration (usually the acceleration due to gravity), L is the characteristic length scale for the problem, σ is the surface tension coefficient, μ is the fluid viscosity, v is the characteristic velocity, K^σ is the surface conductivity, K^B is the bulk conductivity, λ is the mean free path, α is the thermal diffusivity ($\alpha = \kappa / (\rho c_p)$), c_p is the heat capacity at constant pressure, κ is the thermal conductivity, and T is the absolute temperature (ΔT is the characteristic temperature difference).

Modeling Microfluidic Fluid Flows

This section describes the modeling of fluid flows with the Navier Stokes or Stokes equations (the section [Modeling Rarefied Gas Flows](#) gives details on how to model rarefied flows). The following topics are covered:

- [Selecting the Right Physics Interface](#)
- [Single-Phase Flow](#)
- [Multiphase Flow](#)
- [Porous Media Flow](#)
- [The Relationship Between the Physics Interfaces](#)




- [Building a COMSOL Multiphysics Model in the *COMSOL Multiphysics Reference Manual*](#)
 - [Modeling Rarefied Gas Flows](#)
-


Selecting the Right Physics Interface


COMSOL Multiphysics has a range of physics interfaces to use for fluid flow in a variety of circumstances. Often the selection of a particular physics interface implies certain assumptions about the equations of flow. If it is known in advance which assumptions are valid, then the appropriate physics interface can be added. However, when the flow type is unclear from the outset, or if it is difficult to reach a solution easily, starting with a simplified model and adding complexity subsequently is often a good approach. Using this approach the results of a simulation are tested against the underlying assumptions and against experimental results and the simulation can then be refined if necessary. For complex models it is often beneficial to take this approach even when the fluid flow is well characterized from the outset because a model with simplifying assumptions can be easier to solve initially. The solution process can then be fine-tuned for the more complex problem. Typically [The Laminar Flow Interface](#) is a good starting point for many problems.

The following sections describe the options available for simulating [Single-Phase Flow](#), [Multiphase Flow](#), and [Porous Media Flow](#).

Single-Phase Flow

The **Fluid Flow>Single-Phase Flow** branch () when adding a physics interface includes the Laminar and Creeping Flow interfaces.

The **Laminar Flow Interface** () is used primarily to model slow-moving flow in environments without sudden changes in geometry, material distribution, or temperature. The Navier-Stokes equations are solved without a turbulence model. Laminar flow typically occurs at Reynolds numbers less than 1000. By default the flow is incompressible (see [Figure 3-1](#)).

The **Creeping Flow Interface** () uses the same equations as the Laminar Flow interface with the additional assumption that the contribution of the inertia term is negligible. This is often referred to as Stokes flow and is appropriate for use when viscous flow is dominant, which is often the case in microfluidics applications. Creeping flow applies when the Reynolds number is much less than one. A creeping flow problem is significantly simpler to solve than a laminar flow problem — so it is best to make this assumption explicitly if it applies. By default the flow is incompressible (see below).



By selecting the **Neglect Inertial Form (Stokes Flow)** check-box, on the **Settings** window for **Laminar Flow** quickly convert a Laminar Flow interface into a Creeping Flow interface.

For both physics interfaces several additional options are available.

SHALLOW CHANNEL APPROXIMATION

Often you might want to simplify long, narrow channels by modeling them in 2D. The [Use Shallow Channel Approximation](#) option is useful as it includes a drag term to approximate the added effects given by thinness of the gap between one set of boundaries in comparison to the others.

COMPRESSIBLE FLOW

For compressible flow it is important that the density and any mass balances are well defined throughout the domain. Choosing to model incompressible flow simplifies the equations to be solved and decreases solution times. Most gas flows should be modeled as compressible flows; however, liquid flows can usually be treated as incompressible.

NON-NEWTONIAN FLOW

The physics interfaces also allow for easy definition of non-Newtonian fluid flow through access to the dynamic viscosity in the Navier-Stokes equations. The fluid can be modeled using the power law and Carreau models or by means of any expression that describes the dynamic viscosity appropriately.

Both physics interfaces also include a feature to compute a laminar velocity profile at arbitrarily shaped inlets and outlets, which makes models much easier to set up.

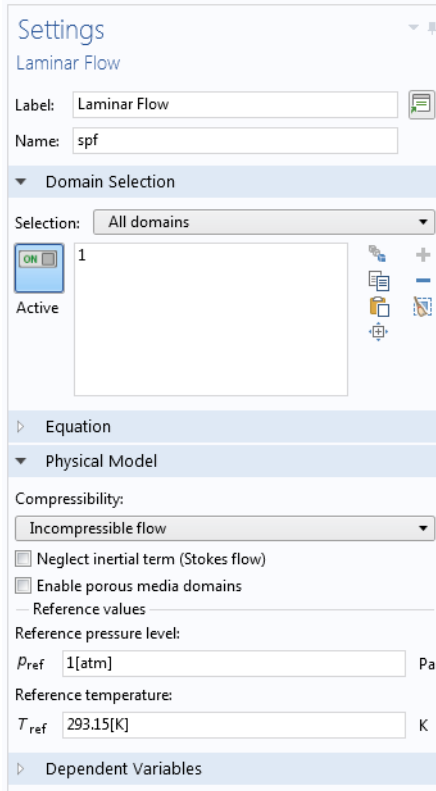







Figure 3-1: The Settings window for Laminar Flow. Model incompressible or compressible ($Ma < 0.3$) flow, and Stokes flow. Combinations are also possible.

Multiphase Flow

The **Multiphase Flow** branch () enables the modeling of multiphase flows. These physics interfaces are included:

- The **Laminar Two-Phase Flow, Level Set Interface** () (available under the **Two-Phase Flow, Level Set** branch () (available under the **Two-Phase Flow, Phase Field** branch () (available under the **Two-Phase Flow, Moving Mesh** branch (

The Two-Phase Flow interfaces can add surface tension forces (including the Marangoni effect) at the two fluid interface(s). A library of surface tension coefficients between some common substances is available.

For problems involving topological changes (for example, jet breakup), use either the Level Set or Phase Field interfaces. These techniques use an auxiliary function (the level set and phase field functions, respectively) to track the location of the interface, which is necessarily diffuse. The Level Set interface does not include surface tension force per default, and is recommended for use in larger scale problems with larger velocities, or when the effects of the gradient of the surface tension coefficient are relevant. The phase field method is physically motivated and is usually more numerically stable than the level set method. It can also be extended to more phases and is compatible with fluid-structure interactions (requires the MEMS Module or the Structural Mechanics Module).




The moving mesh method represents the interface as a boundary condition along a line or surface in the geometry. Because the physical thickness of phase boundaries is usually very small, for most practical meshes [The Laminar Two-Phase Flow, Moving Mesh Interface](#) describes the two-phase boundary the most accurately. However, it cannot accommodate topological changes in the boundary.

For all the Two-Phase Flow interfaces, compressible flow is possible to model at speeds of less than 0.3 Mach. You can also choose to model incompressible flow by simplifying the equations to be solved. Stokes' law is also an option.


In each physics interface, the density and viscosity are specified for both fluids. You can easily use non-Newtonian models for any of the two fluids, based on the power law, the Carreau model, or using an arbitrary user-defined expression.

It is often advantageous to use more than one of these techniques to solve a problem — for example, a level set model for jet breakup could be checked prior to breakup by a moving mesh model to ensure that the surface tension is captured accurately by the diffuse interface.




Under the **Mathematics>Moving Interface** branch () when adding an interface, **The Level Set Interface** () and **The Phase Field Interface** () are available in a form uncoupled with the equations of flow. These interfaces can be used to model phenomena in which other factors dominate over the fluid flow, such as some forms of phase separation.


Porous Media Flow

The **Porous Media and Subsurface Flow** branch () has the physics interfaces to model flow in porous media. The flow can be modeled by Darcy's Law or the Brinkman Equations interfaces. Additionally the Brinkman equations can be combined with laminar flow in the Free and Porous Media Flow interface.

DARCY'S LAW

The Darcy's Law Interface () is used to model fluid movement through interstices in a porous medium in the case where the fluid viscosity dominates over its inertia. Together with the continuity equation and the equation of state for the pore fluid (or gas) Darcy's law is used to model low velocity flows, for which the pressure gradient is the dominant driving force (typically when the Reynolds number of the flow is less than one). The penetration of reacting gases in a tight catalytic layer, such as a washcoat or membrane, is an example in which Darcy's law applies. Often Darcy's law is applicable for microfluidic applications, as it is appropriate for the limit of small pore size.

BRINKMAN EQUATIONS

The Brinkman Equations Interface () is used in situations where the fluid inertia, or other effects such as body forces, can no longer be neglected. Fluid penetration of filters and packed beds are applications for this physics interface. The Brinkman equations are similar in form to the Navier Stokes equations. [Figure 3-2](#) shows the **Settings** window for the Brinkman Equations interface.

For low Reynolds number flows in which other terms in the Brinkman equations are necessary the [Neglect Inertial Term \(Stokes-Brinkman Flow\)](#) feature can be selected to neglect the inertial term in the equations (this is selected by default). The flow is treated as incompressible by default, but compressible flow can be enabled by selecting **Compressible Flow ($Ma < 0.3$)**. When using the compressible flow feature the fluid density must be defined as a function of the local pressure.

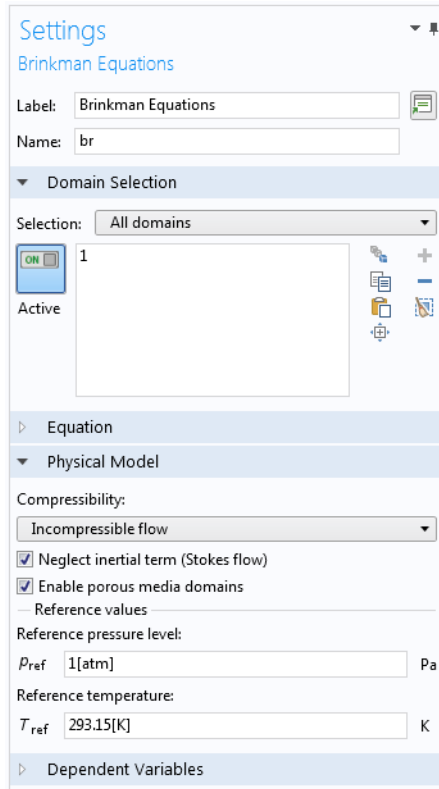



Figure 3-2: The Settings window for Brinkman Equations. Model incompressible or compressible ($Ma < 0.3$) flow, and Stokes flow. Combinations are also possible.

FREE AND POROUS MEDIA

The [Free and Porous Media Flow Interface](#) () has predefined couplings between the Brinkman Equations interface and the Laminar Flow interface. Porous regions of the models are included by adding a [Porous Matrix Properties](#) node with the appropriate selections to the model. The default [Fluid Properties](#) node can then be used to define regions of free laminar flow. This physics interface has all the options

from both [The Laminar Flow Interface](#) and [The Brinkman Equations Interface](#). An example application area for this physics interface would be a catalytic converter.

It should be noted that if the porous medium is large in comparison to the free channel, and the results in the region of the interface are not of interest, then it is possible to manually couple a Fluid Flow interface to the Darcy’s Law interface. This makes the model computationally cheaper.

The Relationship Between the Physics Interfaces

Several of the physics interfaces vary only by one or two default settings (see [Table 3-4](#), [Table 3-5](#)) in the **Physical Model** section, which are selected either from a check box or list. For the Single-Phase Flow branch, the Laminar Flow and Creeping Flow interfaces have the same *Name* (spf), and this is the same for two of the Two-Phase Flow interfaces. In the Porous Media Flow branch the Free and Porous Media Flow interface combines a Laminar Flow interface with a Brinkman Equations interface (see [Table 3-6](#)).

TABLE 3-4: THE SINGLE-PHASE FLOW PHYSICAL MODEL DEFAULT SETTINGS

PHYSICS INTERFACE LABEL	NAME	COMPRESSIBILITY	NEGLECT INERTIAL TERM (STOKES FLOW)
Laminar Flow	spf	Compressible flow (Ma<0.3)	None
Creeping Flow	spf	Compressible flow (Ma<0.3)	Stokes Flow

TABLE 3-5: TWO-PHASE FLOW PHYSICAL MODEL DEFAULT SETTINGS

PHYSICS INTERFACE LABEL	NAME	MULTIPHASE FLOW MODEL	COMPRESSIBILITY	NEGLECT INERTIAL TERM (STOKES FLOW)
Laminar, Two-Phase Flow, Level Set	tpf	Two phase flow, level set	Incompressible flow	None
Laminar, Two-Phase Flow, Phase Field	tpf	Two phase flow, phase field	Incompressible flow	None
Laminar, Two-Phase Flow, Moving Mesh	spf	not applicable	Incompressible flow	None

TABLE 3-6: THE POROUS MEDIA FLOW DEFAULT SETTINGS

PHYSICS INTERFACE LABEL	NAME	COMPRESSIBILITY	NEGLECT INERTIAL TERM	PORE SIZE
Darcy's Law	dl	n/a	n/a	Low porosity and low permeability, slow flow
Brinkman Equations	br	Incompressible flow	Yes - Stokes-Brinkman	High permeability and porosity, faster flow
Free and Porous Media Flow	fp	Incompressible flow	Not selected	High permeability and porosity, fast flow

Modeling Coupled Phenomena in Microfluidics



In this section:

- [Chemical Transport and Reactions](#)
- [Electrohydrodynamics](#)
- [Heat Transfer](#)
- [Coupling to Other Physics Interfaces](#)



See [The AC/DC Interfaces](#) in the *COMSOL Multiphysics Reference Manual* for details, including theory, about [The Electrostatics Interface](#) and [The Magnetic Fields Interface](#), which are included with the basic COMSOL Multiphysics license and discussed in this section.

Chemical Transport and Reactions

In the Microfluidics Module, [The Transport of Diluted Species Interface](#) () and [The Transport of Diluted Species in Porous Media Interface](#) () are available for modeling the transport of chemical species and ions. The assumption in these physics interfaces is that one component, a solvent, is present in excess (typically more than 90 mol%). This means that the mixture properties, such as density and viscosity, are independent of concentration. To model concentrated species, the Chemical Reaction Engineering Module is recommended in addition to the Microfluidics Module.

By default the Transport of Diluted Species interface accounts for the diffusion of species by Fick's law and convection due to bulk fluid flow (see [Figure 3-3](#)). The fluid velocity field can be coupled from another physics interface (for example, Laminar Flow) by means of a domain level model input. The migration of ionic species in an electric field can also be added by selecting the appropriate check box in the Settings window for the physics interface — in this case an additional Electrostatics interface is usually coupled into the problem by an additional model input.

Chemical reactions can be added to the physics interface at the domain level by the [Reactions](#) node, which requires the Chemical Reaction Engineering Module. This allows you to specify expressions for the consumption or production of species in terms

of their concentration, the concentration of other species and other model parameters, such as the temperature.

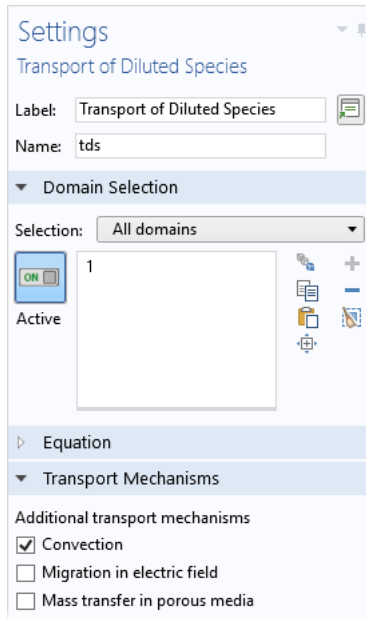



Figure 3-3: The Settings window for Transport of Diluted Species, with Convection selected as the Transport Mechanism by default.

STABILIZATION SETTINGS FOR DILUTED SPECIES TRANSPORT

For some laminar flow problems it can be useful to change the settings for the dilute species transport stabilization. To do this, click the **Show More Options** button () and select **Stabilization** in the **Show More Options** dialog box. A **Consistent stabilization** section is now visible in the Transport of Diluted species settings, and in some cases it can be desirable to change the settings for the crosswind diffusion. By default the **Crosswind diffusion type** is set to **Do Carmo and Galeão**. This type of crosswind diffusion reduces undershoot and overshoot to a minimum but can in rare cases give equations systems that are difficult to fully converge. The alternative option, **Codina** is less diffusive and so should be used if the species transport is highly convective, or if convergence problems occur. This option can result in more undershoot and overshoot and is also less effective for anisotropic meshes. The Codina option activates a text field for the **Lower gradient limit** g_{lim} (SI unit: mol/m⁴). It defaults to $0.1 [\text{mol}/\text{m}^3] / \text{tds}.\text{helem}$, where $\text{tds}.\text{helem}$ is the local element size.

For both consistent stabilization methods, the **Equation residual** can also be changed. **Approximate residual** is the default setting and it means that derivatives of the diffusion tensor components are neglected. This setting is usually accurate enough and is faster to compute. If required, select **Full residual** instead.

Electrohydrodynamics

Electrohydrodynamics is a general term describing phenomena that involve the interaction between solid surfaces, ionic solutions, and applied electric and magnetic fields. Electrohydrodynamics is frequently employed in microfluidic devices to manipulate fluids and move particles for sample handling and chemical separation.

Electrokinetics refers to a range of fluid flow phenomena involving electric fields. These include electroosmosis, electrothermal effects, electrophoresis and dielectrophoresis. *Electroosmosis* describes the motion of fluids induced by the forces on the charged EDLs at the surfaces of the fluid. *Electrothermal effects* occur in a conductive fluid where the temperature is modified by Joule heating from an AC electric field. This creates variations in conductivity and permittivity and thus Coulomb and dielectric body forces. *Electrophoresis* and *dielectrophoresis* describe the motion of charged and polarized particles in a non-uniform AC or DC applied field.

Magnetohydrodynamics refers to fluid flow phenomena involving magnetic fields. *Magnetophoresis* is the motion of diamagnetic particles in a nonuniform magnetic field and is commonly used for magnetic bead separation.

[Table 3-7](#) summarizes these categories. Although these examples describe specific multiphysics couplings, COMSOL Multiphysics is not limited to these cases — for

example, it is possible to include both magnetic and electric fields to simulate electromagnetophoresis.

TABLE 3-7: ELECTROHYDRODYNAMIC PHENOMENA

TYPE OF FIELD/FORCE	DC	AC
ELECTRIC FIELD (ELECTROKINETICS)		
Surface force on fluid	Electroosmosis	AC electroosmosis
Force on suspended particles	Electrophoresis / Dielectrophoresis	AC Electrophoresis /AC Dielectrophoresis
Body force on fluid	-	Electrothermal
Magnetic Field		
Force on suspended particles	Magnetophoresis	-



See [The AC/DC Interfaces](#) in the *COMSOL Multiphysics Reference Manual* for details, including theory, about [The Electrostatics Interface](#) and [The Magnetic Fields Interface](#), which are included with the basic COMSOL license and discussed in this section.

ELECTROOSMOSIS

When a polar liquid (such as water) and a solid surface (such as glass or a polymer-based substrate) come into contact, charge transfer occurs between the surface and the electrolytic solution. At finite temperature the charges on the surface are not screened perfectly by the ions in the liquid and a finite thickness *electric double layer (EDL)* or *Debye layer* develops. *Electroosmosis* is the process by which motion is induced in a liquid due to the body force acting on the EDL in an electric field.

A complete model of the system includes the space charge layer explicitly. The electric potential is the solution of a nonlinear partial differential equation, the Poisson-Boltzmann equation, which can be solved by coupling an Electrostatics interface to a Transport of Diluted Species interface (with migration enabled) for the ion species. The software then computes the forces on the fluid and a further coupled Laminar Flow or Creeping Flow interface is used to compute the overall fluid flow. In practice this approach is only possible for nanoscale channels — as typically the EDL thickness is 1–10 nm.

The Poisson Boltzmann equation is sometimes linearized — this is referred to as the Debye-Hückel approximation which applies when $ze\zeta \ll k_B T$, where ζ is the potential at the surface of the moving volume of fluid (the *zeta potential*). At room temperature

this corresponds to the limit $\zeta \ll 26$ mV. Note that there is a layer of immobile ions trapped adjacent to the surface (the *Stern Layer*, which is of order one hydrated ion radius thick) with an associated volume of immobile fluid; this means that ζ is not simply the wall potential. ζ is usually determined experimentally from electroosmotic flow measurements.

The Poisson-Boltzmann equation has a characteristic length scale — the Debye length, λ_D :

$$\lambda_D = \sqrt{\frac{\epsilon k_B T}{2z^2 e^2 c_\infty}}$$

where k_B is Boltzmann's constant, T is the temperature, z is the ion's valance number, e is the electron charge, and c_∞ is the ion's molar concentration in the bulk solution. When the Debye length is small compared to the channel thickness, the electroosmotic flow velocity can be modeled by the *Helmholtz-Smoluchowski equation*:

$$u_{eo} = \frac{\epsilon \zeta}{\mu} E$$

where E is the applied electric field and μ is the liquid's dynamic viscosity. From this equation, the electroosmotic mobility is naturally defined as:

$$\mu_{eo} = \frac{\epsilon \zeta}{\mu} \quad (3-1)$$

The Laminar Flow and Creeping Flow interfaces include a wall boundary condition option for an Electroosmotic Velocity boundary condition. This enables you to specify the external electric field (which can be manually specified or coupled from an Electrostatics interface) and the electroosmotic mobility to define an electroosmotic flow.

Further details of the theory of electroosmosis can be found in [Ref. 1](#) and [Ref. 2](#).

AC ELECTROOSMOSIS

Because an alternating electric field does not generate a net force on the EDL, AC electroosmosis is not used for fluid transport in microfluidics. However, the back-and-forth movements an AC field generates are useful for mixing purposes. To model AC electroosmotic flow when the frequency of the electric field is sufficiently low, the same approaches can be taken as for DC electroosmosis. An Electrostatics interface should still be used to calculate the electric field, but when this is coupled into other physics interfaces, the AC dependence should be explicitly added using an

expression. With increasing frequency, AC electroosmosis becomes less important so this approach is valid for most practical examples.



ELECTROPHORESIS

Electrophoresis describes the motion of charged particles or molecules suspended in a liquid due to an applied electric field.

In COMSOL Multiphysics it is easy to calculate the electrophoretic velocity for spherical particles for the cases when the Debye length is much smaller or much larger than the particle size. If the surface conductivity of the particle can be neglected (this is sometimes referred to as the limit or small Dukhin number) the electrophoretic velocity (the particle velocity relative to the bulk flow) is given by:

$$\mathbf{u}_{ep} = \frac{2}{3}\mu_{eo}f\left(\frac{a}{\lambda_D}\right)\mathbf{E}$$

where a is the radius of the particle, \mathbf{E} is the electric field, and $f(a/\lambda_D)$ is known as Henry's function (note that $f(a/\lambda_D)$ is often written as $f(\kappa a)$ where $\kappa=1/\lambda_D$). Henry's function takes the value of 1 in the limiting case where $a \ll \lambda_D$ (often known as the Hückel approximation) and 3/2 in the case where $a \gg \lambda_D$ (this is equivalent to [Equation 3-1](#) and is referred to as the Smoluchowski approximation). Note that if λ_D is large compared to the fluid volume, the charge is effectively unscreened and the electric force is simply that due to the charge on the molecule. The following result is obtained from the force balance between the Stokes drag and the electric force for an unscreened charged particle:

$$\mathbf{u}_{ep} = \frac{q}{6\pi\mu a}\mathbf{E}$$

where q is the charge on the molecule and μ is the fluid viscosity. Further details of the theory of electroosmosis can be found in [Ref. 2](#).

These velocity fields can be computed directly from an electric field calculated by the Electrostatics interface. If necessary the velocity can be added to the flow velocity field to compute the net particle velocity.

DIELECTROPHORESIS

Dielectrophoresis (DEP) describes the motion of polarizable particles suspended in a fluid with an applied nonuniform electric field. The electric field induces a dipole moment on the particles, which in turn produces a net force. In the following discussion the general case of AC electrophoresis is treated, which is more commonly used for practical reasons (see [Ref. 1](#) for further details).



For a DC field these results can be applied if $\mathbf{E}_{\text{rms}} = \mathbf{E}$ is used.

The time-dependent dielectrophoretic force acting on a particle in an applied field is given by ([Ref. 1](#)):

$$\mathbf{F}_{\text{DEP}}(t) = 2\pi\epsilon_m a^3 K(\epsilon_m, \epsilon_p) \nabla(\mathbf{E}(t) \cdot \mathbf{E}(t)) \quad (3-2)$$

where ϵ_m and ϵ_p are the complex permittivities of the medium and the particle respectively, a is the radius of the particle's equivalent homogeneous sphere and $K(\epsilon_m, \epsilon_p)$ is the Clausius-Mossotti function. The complex permittivity, ϵ^* , for an isotropic homogeneous dielectric is

$$\epsilon^* = \epsilon - i \frac{\sigma}{\omega}$$

where ϵ is the electric permittivity, σ is the electrical conductivity, and ω is the angular field frequency. The Clausius-Mossotti function is given by:

$$K(\epsilon_m, \epsilon_p) = \frac{\epsilon_p - \epsilon_m}{\epsilon_p + 2\epsilon_m}$$

which depends on the particle's complex permittivity, ϵ_p , and that of the medium, ϵ_m .

Taking the time average of [Equation 3-2](#) gives the time averaged force:

$$\langle \mathbf{F}_{\text{DEP}}(t) \rangle = 2\pi\epsilon_m r_0 \text{Re}(K(\epsilon_m, \epsilon_p)) \nabla(\mathbf{E}_{\text{rms}} \cdot \mathbf{E}_{\text{rms}})$$

By balancing this force with the Stokes drag force the dielectrophoretic velocity is obtained:

$$\mathbf{u}_{\text{DEP}} = \frac{\epsilon_m r_0 \text{Re}(K(\epsilon_m, \epsilon_p)) \nabla(\mathbf{E}_{\text{rms}} \cdot \mathbf{E}_{\text{rms}})}{3\mu}$$

where μ is the dynamic viscosity.

The value of \mathbf{E}_{rms} can be computed from an Electrostatics interface in which the root mean square (RMS) voltages are applied as boundary conditions. The gradient of the field can then be computed term by term from the spatial derivatives of an expression for the dot product of the electric field with itself. Finally the dielectrophoretic velocity term can be added to the velocity field to compute the particle velocity field.

MAGNETOPHORESIS

Particles with an induced or permanent magnetization can be moved relative to a fluid flow by the application of an external, inhomogeneous magnetic field. This process is analogous to dielectrophoresis and is usually termed magnetophoresis. In the case of a nonconducting particle, in a static, irrotational external applied field, \mathbf{H}_{ext} , the magnetophoretic force is given by (Ref. 1):

$$\mathbf{F}_{MAP} = 2\pi\mu_m K(\mu_m, \mu_p) a^3 \nabla(\mathbf{H}_{\text{ext}} \cdot \mathbf{H}_{\text{ext}})$$

where μ_m and μ_p are the permeabilities of the medium and the particle respectively (usually $\mu_m = \mu_0$), a is the radius of the particle's equivalent homogeneous sphere and $K(\mu_m, \mu_p)$ is the Clausius-Mossotti function. Note that the external magnetic field, \mathbf{H}_{ext} , should be distinguished from the local field \mathbf{H} which includes contributions from the particle itself. In this case the Clausius-Mossotti function is given by:

$$K(\mu_m, \mu_p) = \frac{\mu_p - \mu_m}{\mu_p + 2\mu_m}$$

By balancing this force with the Stokes drag force the magnetophoretic velocity is obtained:

$$\mathbf{u}_{MAP} = \frac{\mu_m r_0 K(\mu_m, \mu_p) \nabla(\mathbf{H}_{\text{ext}} \cdot \mathbf{H}_{\text{ext}})}{3\mu}$$

where μ is the dynamic viscosity.

The value of \mathbf{H}_{ext} can be computed from a Magnetic Fields or a Magnetic Fields, No Currents interface.



The Magnetic Fields, No Currents interface requires the AC/DC Module.



The gradient of the field can then be computed term by term from the spatial derivatives of an expression for the dot product of the magnetic field with itself. Finally the magnetophoretic velocity term can be added to the velocity field to compute the particle velocity field.

ELECTROTHERMALLY-DRIVEN FLOW

Electrothermal body forces arise from electrically generated, nonuniform Joule heating, which creates variations in conductivity and permittivity and thus Coulomb and dielectric body forces. It is possible to determine the resulting fluid motion by solving the Navier-Stokes equations with an additional electrothermal body force term. The electric field is once again assumed to be quasi-static and can be coupled in from an Electrostatics interface.

The electrothermal force is given by:

$$\mathbf{F} = -\frac{1}{2} \left[\left(\frac{\nabla \sigma}{\sigma} + \frac{\nabla \epsilon}{\epsilon} \right) \cdot \mathbf{E} \frac{\epsilon \mathbf{E}}{1 + (\omega \tau)^2} + \frac{1}{2} |\mathbf{E}|^2 \nabla \epsilon \right]$$

where σ is the conductivity, ϵ is the fluid's permittivity, ω is the angular frequency of the electric field, and $\tau = \epsilon/\sigma$ is the fluid's charge-relaxation time. The electric-field vector \mathbf{E} contains the amplitude and direction of the AC electric field but not its instantaneous value.

Because of the heating, ϵ and σ are temperature dependent, and their gradients are functions of the temperature gradient: $\nabla \epsilon = (\partial \epsilon / \partial T) \nabla T$ and $\nabla \sigma = (\partial \sigma / \partial T) \nabla T$. With water, for example, the relative change rates for the permittivity and the conductivity are $(1/\epsilon)(\partial \epsilon / \partial T) = -0.004$ 1/K and $(1/\sigma)(\partial \sigma / \partial T) = 0.02$ 1/K, respectively.

ELECTROWETTING

The contact angle of a two-fluid interface with a solid surface is determined by the balance of the forces at the contact point. The equilibrium contact angle, θ_0 , is given by Young's equation:

$$\gamma_{s1} + \sigma_{12} \cos \theta_0 = \gamma_{s2}$$

Here γ_{s1} is the surface energy per unit area between fluid 1 and the solid surface, γ_{s2} is the surface energy per unit area between fluid 2 and the solid surface, and σ_{12} is the surface tension at the interface between the two fluids.

In *electrowetting* the balance of forces at the contact point is modified by the application of a voltage between a conducting fluid and the solid surface. For many applications the solid surface consists of a thin dielectric deposited onto a conducting layer; this is often referred to as *Electrowetting on Dielectric* (EWOD). In this case, the capacitance of the dielectric layer dominates over the double layer capacitance at the solid-liquid interface (Ref. 3). The energy stored in the capacitor formed between the conducting liquid and the conducting layer in the solid reduces the effective surface energy of the liquid to which the voltage is applied. For the case when a voltage difference occurs between fluid 1 and the conductor beyond the dielectric Young's equation is modified as follows:

$$\gamma_{s1} - \frac{\epsilon V^2}{2d_f} + \sigma_{12} \cos \theta_{ew} = \gamma_{s2}$$

Here ϵ is the permittivity of the dielectric, V is the potential difference applied, and d_f is the dielectric thickness. This equation can be rewritten as

$$\cos \theta_{ew} = \cos \theta_0 + \frac{\epsilon V^2}{2\sigma_{12}d_f} \quad (3-3)$$

Electrowetting can therefore be used to modify the contact angle dynamically by changing the applied voltage.

The EWOD applications can be modeled by using Equation 3-3 as an expression for the contact angle. This can simply be entered as the value of the contact angle in the Two-Phase Flow interface that is being used. Note that the software automatically handles a time varying voltage in this expression.



For step-by-step instructions, see *Electrowetting Lens: Application*
Library path **Microfluidics_Module/Two-Phase_Flow/electrowetting_lens**.

Heat Transfer

It is often necessary to consider the effect of heat flow and temperature dependent material properties (such as the viscosity or the surface tension) in microfluidic systems. The COMSOL Multiphysics base package includes physics interfaces for heat transfer

in incompressible fluids and solids. The Heat Transfer Module is required in addition to this module to model heat flow in compressible fluids and to include viscous heating terms. This section describes how to couple heat transfer to microfluidics models using the functionality available in the COMSOL Multiphysics base package and the Microfluidics Module.

The Heat Transfer interface includes the equations for heat transfer in both fluid and solid domains. To model a system consisting of both solid and liquid domains add a single Heat Transfer interface and then add nodes for Heat Transfer in Solids and Heat Transfer in Fluids with selections corresponding to the solid and fluid domains respectively. For a fluid domain the convective flow is coupled into domain by selecting the velocity field from a corresponding Laminar Flow or Creeping Flow interface.

The fluid domain models the heat transfer including both convection and conduction according to the equation:

$$\rho C_p \left(\frac{\partial T}{\partial t} + (\mathbf{u} \cdot \nabla) T \right) = -(\nabla \cdot \mathbf{q}) + Q$$

where, ρ is the fluid density (SI unit: kg/m^3), C_p is the specific heat capacity at constant pressure (SI unit: $\text{J}/(\text{kg}\cdot\text{K})$), T is absolute temperature (SI unit: K), \mathbf{u} is the velocity vector (SI unit: m/s), \mathbf{q} is the heat flux by conduction (SI unit: W/m^2), and Q contains heat sources other than viscous heating (SI unit: W/m^3). For a solid domain the following equation applies:

$$\rho C_p \frac{\partial T}{\partial t} = -(\nabla \cdot \mathbf{q}) + Q$$

When using the heat transfer in solids and in fluids domain properties the software automatically includes the heat transfer between the solid and the fluid. It is important to include the correct thermal boundary conditions on regions where fluid flows into or out of a domain, typically a Temperature condition for an inlet and an Outflow condition for an outlet.



For a detailed discussion of the fundamentals of heat transfer, see [Ref. 4](#). More details of the heat transfer capabilities can be found in [The Heat Transfer Interfaces](#) in the *COMSOL Multiphysics Reference Manual*.

Coupling to Other Physics Interfaces

The COMSOL Multiphysics software is not limited to the common couplings described in this chapter — there are many other phenomena that can be easily modeled in microfluidics. In many cases, physics interfaces can be coupled simply by entering expressions from one physics interface (such as the local temperature) into fields in another physics interface (for example in the **Model Inputs** section of a **Fluid Properties** node). Additionally, COMSOL Multiphysics includes powerful coupling operators that enable physics interfaces to be linked by projections, extrusions, or scalar quantities such as integrals and global averages.



[Nonlocal Couplings and Coupling Operators](#) in the *COMSOL Multiphysics Reference Manual*

Modeling Rarefied Gas Flows

In this section:

- [The Flow Regimes](#)
- [Slip Flow](#)
- [References for the Theory of Microfluidics](#)

The Flow Regimes

Rarefied gas flow occurs when the mean free path, λ , of the molecules becomes comparable with the length scale of the flow, l . There are four flow regimes depending on the value of the Knudsen number, $Kn=\lambda/l$ ([Ref. 5](#)):

- Continuum flow ($Kn<0.01$)
- Slip flow ($0.01<Kn<0.1$)
- Transitional flow ($0.1<Kn<10$)
- Free molecular flow ($Kn>10$)

These flow regimes are shown in [Figure 3-4](#). In the *continuum flow* regime the Navier-Stokes equations are applicable, as discussed in [Modeling Microfluidic Fluid Flows](#). Gases flowing in the slip flow regime can be modeled using the Navier-Stokes equations with modified boundary conditions. The [Slip Flow](#) interface is included with the Microfluidics Module and can be used to model gas flows at these moderate Knudsen numbers. The Molecular Flow Module includes the Transitional Flow and the Free Molecular Flow interfaces, which can be used to model fully kinetic gas flows, at Knudsen numbers greater than 0.1.

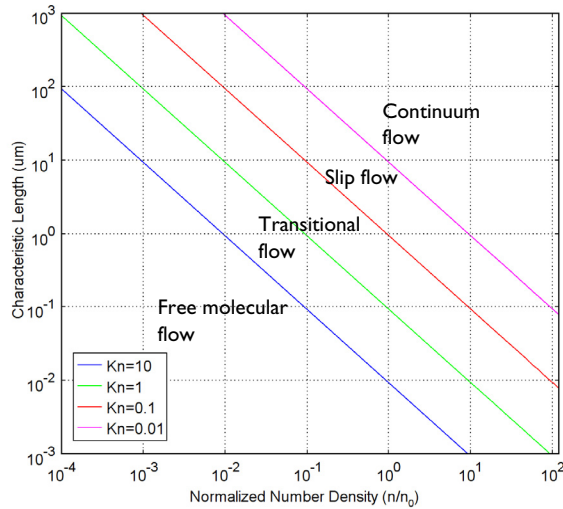


Figure 3-4: A plot showing the main fluid flow regimes for rarefied gas flows. Different regimes are separated by lines of constant Knudsen numbers. The number density of the gas is normalized to the number density of an ideal gas at a pressure of 1 atmosphere and a temperature of 0 °C (n_0).

Slip Flow

In the slip flow regime, the Navier-Stokes equations can still be used with modified boundary conditions to account for rarefaction effects close to the wall. A layer of rarefied gas with a size similar to the mean free path develops close to the wall — this is termed the *Knudsen layer*. The Navier-Stokes equations are not applicable in this layer, but the flow outside the layer can be described by extrapolating the bulk gas flow toward the wall and applying Maxwell’s slip boundary condition at the wall (Ref. 5). For thermal flows the von Smoluchowski temperature jump boundary condition must also be applied (Ref. 5).

To model flows in the slip flow regime use the Slip Flow interface. That physics interface can be used to model isothermal and nonisothermal flows with or without explicit modeling of thermal processes in adjacent solid domains. To model isothermal flows use the Temperature boundary condition on all external model surfaces, with the temperature set equal to the fluid temperature. The Slip Wall and External Slip Wall boundary conditions are used to model slip on interior and exterior model boundaries respectively. These boundary conditions include thermal creep or transpiration, viscous

slip, and the von Smoluchowski temperature jump. The slip coefficients can be specified directly or by means of Maxwell's model. For further details see [The Slip Flow Interface](#) and [Theory for the Slip Flow Interface](#).



- The [Temperature](#) boundary condition is described for the Heat Transfer interface in the *COMSOL Multiphysics Reference Manual*.
 - [Slip Velocity](#)
-

References for the Theory of Microfluidics

1. H. Bruus, *Theoretical Microfluidics*, Oxford University Press, 2008.
2. R.F. Probstein, *Physicochemical Hydrodynamics: An Introduction*, 2nd ed., Wiley-Interscience, 2003.
3. F. Mugele and J.C. Baret, “Electrowetting: from basics to applications”, *J. Phys. Condens. Matter*, vol. 17, pp. R705–R774, 2005.
4. F.P. Incropera and D.P. DeWitt, *Fundamentals of Heat and Mass Transfer*, 4th ed., John Wiley & Sons, 1996.
5. G. Kariadakis, A. Beskok, and N. Aluru, *Microflows and Nanoflows*, Springer Science and Business Media, 2005.

Single-Phase Flow Interfaces

There are several Fluid Flow interfaces available with the Microfluidics Module. These are grouped by type and found under the **Fluid Flow>Single-Phase Flow** branch (≡) when adding a physics interface. See [Modeling Microfluidic Fluid Flows](#) to help you select which physics interface to use.

In this chapter:

- [The Laminar Flow and Creeping Flow Interfaces](#)
- [Theory for the Single-Phase Flow Interfaces](#)


The Laminar Flow and Creeping Flow Interfaces

In this section:


- [The Creeping Flow Interface](#)
- [The Laminar Flow Interface](#)
- [Domain, Boundary, Pair, and Point Nodes for Single-Phase Flow](#)



- [Theory for the Single-Phase Flow Interfaces](#)
-

In the *COMSOL Multiphysics Reference Manual*, see [Table 2-4](#) for links to common sections such as **Discretization**, **Consistent Stabilization**, **Inconsistent Stabilization**, and **Advanced Settings** sections, some of them accessed by clicking the **Show** button () and choosing the applicable option. You can also search for information: press F1 to open the **Help** window or Ctrl+F1 to open the **Documentation** window.

The Creeping Flow Interface

The **Creeping Flow (spf)** interface () is used for simulating fluid flows at very low Reynolds numbers for which the inertial term in the Navier-Stokes equations can be neglected. Creeping flow, also referred to as Stokes flow, occurs in systems with high viscosity or small geometrical length scales (for example, in microfluidics and MEMS devices). The fluid can be compressible or incompressible, as well as Newtonian or non-Newtonian.

The equations solved by the Creeping Flow interface are the Stokes equations for conservation of momentum and the continuity equation for conservation of mass.

The Creeping Flow interface can be used for stationary and time-dependent analyses.

The main feature is the **Fluid Properties** node, which adds the Stokes equations and provides an interface for defining the fluid material and its properties. Except where noted below, see [The Laminar Flow Interface](#) for all other settings.



PHYSICAL MODEL

By default, the **Neglect inertial term (Stokes flow)** check box is selected. If unchecked, the inertial terms are included in the computations.


DISCRETIZATION

By default, the Creeping Flow interface uses **P2+P1** elements. Contrary to general laminar and turbulent single-phase flow simulations employing purely linear P1+P1 elements, P2+P1 elements are well suited for most creeping flow simulations but are not in general fully conservative. Full conservation properties and high accuracy is obtained by selecting P2+P2 or P3+P3 elements.

Note that P1+P1, P2+P2, and P3+P3 discretizations (the so-called equal order interpolations) require streamline diffusion to be active.

	<ul style="list-style-type: none">• The Laminar Flow Interface• Theory for the Single-Phase Flow Interfaces Theory for the Single-Phase Flow Interfaces Theory for the Single-Phase Flow Interfaces
	<ul style="list-style-type: none">• <i>Transport in an Electrokinetic Valve</i>: Application Library path Microfluidics_Module/Fluid_Flow/electrokinetic_valve• <i>Controlled Diffusion Micromixer</i>: Application Library path Microfluidics_Module/Micromixers/controlled_diffusion_micromixer

The Laminar Flow Interface

The **Laminar Flow (spf)** interface () is used to compute the velocity and pressure fields for the flow of a single-phase fluid in the laminar flow regime. A flow remains laminar as long as the Reynolds number is below a certain critical value. At higher Reynolds numbers, disturbances have a tendency to grow and cause transition to turbulence. This critical Reynolds number depends on the model, but a classical example is pipe flow, where the critical Reynolds number is known to be approximately 2000.

The physics interface supports incompressible flow, weakly compressible flow (the density depends on temperature but not on pressure), and compressible flow at low Mach numbers (typically less than 0.3). It also supports flow of non-Newtonian fluids.

The equations solved by the Laminar Flow interface are the Navier-Stokes equations for conservation of momentum and the continuity equation for conservation of mass.

The Laminar Flow interface can be used for stationary and time-dependent analyses. Time-dependent studies should be used in the high-Reynolds number regime as these flows tend to become inherently unsteady.

When the Laminar Flow interface is added, the following default nodes are also added in the **Model Builder: Fluid Properties, Wall** (the default boundary condition is **No slip**), and **Initial Values**. Other nodes that implement, for example, boundary conditions and volume forces, can be added from the **Physics** toolbar or from the context menu displayed when right-clicking **Laminar Flow**.

SETTINGS

The **Label** is the default physics interface name.

The **Name** is used primarily as a scope prefix for variables defined by the physics interface. Physics interface variables can be referred to using the pattern `<name>.<variable_name>`. In order to distinguish between variables belonging to different physics interfaces, the `name` string must be unique. Only letters, numbers, and underscores (`_`) are permitted in the **Name** field. The first character must be a letter.

The default **Name** (for the first physics interface in the model) is `spf`.

About the Physics Interface Label Names

The label for a single-phase flow interface (the node name in the Model Builder) is dynamic and is reset according to the turbulence model and the neglect inertial term (Stokes flow) property set at the physics interface level. The availability also depends on the software license.

If the **Neglect inertial term (Stokes flow)** check box is selected, then the Label changes to **Creeping Flow**, which is the same Label that displays when that interface is added from the Model Wizard or Add Physics window.

PHYSICAL MODEL

Compressibility

Depending of the fluid properties and the flow regime, three options are available for the **Compressibility** option. In general the computational complexity increases from **Incompressible flow** to **Weakly compressible flow** to **Compressible flow (Ma<0.3)** but the underlying hypotheses are increasingly more restrictive in the opposite direction.

When the **Incompressible flow** option (default) is selected, the incompressible form of the Navier-Stokes and continuity equations is applied. In addition, the fluid density is evaluated at the **Reference pressure level** defined in this section. The **Reference temperature** is set to 293.15 K.

The **Weakly compressible flow** option models compressible flow when the pressure dependency of the density can be neglected. When selected, the compressible form of the Navier-Stokes and continuity equations is applied. In addition, the fluid density is evaluated at the **Reference pressure level** defined in this section.

When the **Compressible flow (Ma<0.3)** option is selected, the compressible form of the Navier-Stokes and continuity equations is applied. $Ma < 0.3$ indicates that the inlet and outlet conditions, as well as the stabilization, may not be suitable for transonic and supersonic flow. For more information, see [The Mach Number Limit](#).

Neglect Inertial Term (Stokes Flow)

For low Reynolds number flows, the inertial terms in the Navier-Stokes equations may be neglected.

Porous Media Domains

With the addition of various modules, the **Enable porous media domains** check box is available. Selecting this option, a **Fluid and Matrix Properties** node, a **Mass Source** node, and a **Forchheimer Drag** subnode are added to the physics interface. These are described for the **Brinkman Equations** interface in the respective module's documentation. The **Fluid and Matrix Properties** can be applied on all domains or on a subset of the domains.

Use Shallow Channel Approximation

For 2D components, selecting the **Use shallow channel approximation** check box enables modeling of fluid flow in shallow channels in microfluidics applications. Such channels often have an almost rectangular cross section where the **Channel thickness** d_z is much smaller than the channel width. Simple 2D components often fail to give correct results for this type of problems because they exclude the boundaries that have the greatest effect on the flow. The shallow channel approximation takes the effect of these boundaries into account by adding a drag term as a volume force to the momentum equation. The form of this term is

$$\mathbf{F}_\mu = -12 \frac{\mu \mathbf{u}}{d_z^2} \quad (4-1)$$

where μ is the fluid's dynamic viscosity, \mathbf{u} is the velocity field, and d_z is the channel thickness. This term represents the resistance that the parallel boundaries impose on

the flow; however, it does not account for any changes in velocity due to variations in the cross-sectional area of the channel.

Reference values

Reference values are global quantities used to evaluate the density of the fluid when the **Incompressible flow** or the **Weakly compressible flow** option is selected.

Reference pressure level There are generally two ways to include the pressure in fluid flow computations: either to use the absolute pressure $p_A = p + p_{\text{ref}}$, or the gauge pressure p . When p_{ref} is nonzero, the physics interface solves for the gauge pressure whereas material properties are evaluated using the absolute pressure. The reference pressure level is also used to define the reference density.

Reference temperature The reference temperature is used to define the reference density.

Reference position When **Include gravity** is selected, the reference position can be defined. It corresponds to the location where the total pressure (that includes the hydrostatic pressure) is equal to the **Reference pressure level**.

DEPENDENT VARIABLES

The following dependent variables (fields) are defined for this physics interface — the **Velocity field \mathbf{u}** and its components, and the **Pressure p** .

If required, the names of the field, component, and dependent variable can be edited. Editing the name of a scalar dependent variable changes both its field name and the dependent variable name. If a new field name coincides with the name of another field of the same type, the fields share degrees of freedom and dependent variable names. A new field name must not coincide with the name of a field of another type or with a component name belonging to some other field. Component names must be unique within a model except when two fields share a common field name.

CONSISTENT STABILIZATION

To enable this section, click the **Show More Options** button () and select **Stabilization** in the **Show More Options** dialog box.

There are two *consistent stabilization methods*: **Streamline diffusion** and **Crosswind diffusion**. Usually, both check boxes for these methods are selected by default and should remain selected for optimal performance. Consistent stabilization methods do not perturb the original transport equation. Streamline diffusion must be selected when using equal-order interpolation for pressure and velocity.

Select the **Use dynamic subgrid time scale** check box to approximate the time-scale tensor in time dependent problems from projections of weak expressions. This check box is selected by default. When not selected the actual time-step is used.

INCONSISTENT STABILIZATION

To enable this section, click the **Show More Options** button () and select **Stabilization** in the **Show More Options** dialog box.


There is usually just one *inconsistent stabilization method* — **Isotropic diffusion**. This method is equivalent to adding a term to the diffusion coefficient in order to dampen the effect of oscillations by making the system somewhat less dominated by convection. If possible, minimize the use of the inconsistent stabilization method because by using it you no longer solve the original problem. By default, the **Isotropic diffusion** check box is not selected because this type of stabilization adds artificial diffusion and affects the accuracy of the original problem. However, this option can be used to get a good initial guess for underresolved problems.

If required, select the **Isotropic diffusion** check box and enter a **Tuning parameter** δ_{id} as a scalar positive value. The default value is 0.25 (a reasonable value to start with is roughly 0.5 divided by the element order). A higher value adds more isotropic diffusion.



- [Numerical Stability — Stabilization Techniques for Fluid Flow](#)

ADVANCED SETTINGS

To display this section, click the **Show More Options** button () and select **Advanced Physics Options** in the **Show More Options** dialog box. Normally these settings do not need to be changed.

The **Use pseudo time stepping for stationary equation form** is per default set to **Automatic from physics**. This option can add pseudo time derivatives to the equation when the **Stationary equation** form is used in order to speed up convergence. Pseudo time stepping is triggered when the Laminar Flow interface is selected in some multiphysics coupling features. Set **Automatic from physics** to **On** to apply pseudo time stepping also for laminar flows. Set it to **Off** to disable pseudo time stepping completely.

When **Use pseudo time stepping for stationary equation form** is set to **Automatic from physics** or **On**, a **CFL number expression** should also be defined. For the default **Automatic**

option, the local CFL number (from the Courant–Friedrichs–Lewy condition) is determined by a PID regulator.



- [Pseudo Time Stepping for Laminar Flow Models](#)
 - [Domain, Boundary, Pair, and Point Nodes for Single-Phase Flow](#)
 - [Theory for the Single-Phase Flow Interfaces](#)
-

DISCRETIZATION

The default discretization for Laminar Flow is **P1+P1** elements — that is, piecewise linear interpolation for velocity and pressure. This is suitable for most flow problems.

Some higher-order interpolations are also available, and they can be cost-effective options to obtain high accuracy for flows with low Reynolds numbers.

The **P2+P2** and **P3+P3** options, the equal-order interpolation options, are the preferred higher-order options because they have higher numerical accuracy than the mixed-order options **P2+P1** and **P3+P2**. The equal-order interpolation options do, however, require streamline diffusion to be active.



Flow Past a Cylinder. Application Library path
COMSOL_Multiphysics/Fluid_Dynamics/cylinder_flow

Domain, Boundary, Pair, and Point Nodes for Single-Phase Flow

The following nodes, listed in alphabetical order, are available from the **Physics** ribbon toolbar (Windows users), **Physics** context menu (Mac or Linux users), or by right-clicking to access the context menu (all users).

- [Boundary Stress](#)
- [External Fluid Interface](#)²
- [Flow Continuity](#)
- [Fluid-Fluid Interface](#)²
- [Fluid Properties](#)
- [Initial Values](#)
- [Inlet](#)
- [Interior Wall](#)
- [Line Mass Source](#)¹
- [Open Boundary](#)
- [Outlet](#)
- [Periodic Flow Condition](#)
- [Point Mass Source](#)¹
- [Pressure Point Constraint](#)
- [Symmetry](#)
- [Volume Force](#)
- [Wall](#)

¹ A feature that may require an additional license

² See documentation for [The Laminar Two-Phase Flow, Moving Mesh Interface](#)



For 2D axisymmetric components, COMSOL Multiphysics takes the axial symmetry boundaries (at $r = 0$) into account and adds an **Axial Symmetry** node that is valid on the axial symmetry boundaries only.

In the *COMSOL Multiphysics Reference Manual*, see [Table 2-4](#) for links to common sections and [Table 2-5](#) to common feature nodes. You can also search for information: press F1 to open the **Help** window or Ctrl+F1 to open the **Documentation** window.

Fluid Properties

The **Fluid Properties** node adds the momentum and continuity equations solved by the physics interface, except for volume forces, which are added by the [Volume Force](#) feature. The node also provides an interface for defining the material properties of the fluid.

MODEL INPUTS

Fluid properties, such as density and viscosity, can be defined through user inputs, variables, or by selecting a material. For the latter option, additional inputs, for example temperature or pressure, may be required to define these properties.

Temperature

By default, the **Temperature** model input is set to **Common model input**, and the temperature is controlled from **Default Model Inputs** under **Global Definitions** or by a locally defined **Model Input**. If a Heat Transfer interface is included in the component, it controls the temperature **Common model input**. Alternatively, the temperature field can be selected from another physics interface. All physics interfaces have their own tags (**Name**). For example, if a Heat Transfer in Fluids interface is included in the component, the **Temperature (ht)** option is available for T .

You can also select **User defined** from the **Temperature** model input in order to manually prescribe T .


Absolute Pressure

This input appears when a material requires the absolute pressure as a model input. The absolute pressure is used to evaluate material properties, but it also relates to the value of the calculated pressure field. There are generally two ways to calculate the pressure when describing fluid flow: either to solve for the absolute pressure or for a pressure (often denoted gauge pressure) that relates to the absolute pressure through a reference pressure.

The choice of pressure variable depends on the system of equations being solved. For example, in a unidirectional incompressible flow problem, the pressure drop over the modeled domain is probably many orders of magnitude smaller than the atmospheric pressure, which, when included, may reduce the stability and convergence properties of the solver. In other cases, such as when the pressure is part of an expression for the gas volume or the diffusion coefficients, it may be more convenient to solve for the absolute pressure.

The default **Absolute pressure** p_A is $p + p_{\text{ref}}$, where p is the dependent pressure variable from the Navier-Stokes or RANS equations, and p_{ref} is from the user input defined at the physics interface level. When p_{ref} is nonzero, the physics interface solves for a

gauge pressure. If the pressure field instead is an absolute pressure field, p_{ref} should be set to 0.

The **Absolute pressure** field can be edited by clicking **Make All Model Inputs Editable** () and entering the desired value in the input field.



Model Inputs and Multiphysics Couplings in the *COMSOL Multiphysics Reference Manual*

FLUID PROPERTIES

Density

The density can either be specified by a material, or by a **User defined** expression. The density in a material can depend on temperature and/or pressure and these dependencies are automatically replaced by p_{ref} for weakly compressible flows and p_{ref} and T_{ref} for incompressible flows (as specified by the **Compressibility** setting at the physics interface level). If density variations with respect to pressure are to be included in the computations, **Compressibility** must be set to compressible. Any dependencies in the density on quantities other than temperature and pressure must be consistent with the **Compressibility** setting at the interface level.

Constitutive Relation

For laminar flow, **Newtonian** and **Inelastic non-Newtonian** constitutive relations are available. Newtonian fluids have a linear relationship between the shear stress and the shear rate.

Dynamic Viscosity

The **Dynamic viscosity** μ describes the relationship between the shear rate and the shear stresses in a fluid. Intuitively, water and air have low viscosities, and substances often described as thick (such as oil) have higher viscosities.

Inelastic non-Newtonian

Non-newtonian fluids are encountered in everyday life and wide range of the industrial processes. Examples of non-Newtonian fluids include yogurt, paper pulp, and polymer suspensions. Such fluids have a non-linear relationship between the shear stress and the share rate. Following inelastic non-Newtonian models are available: Power law, Carreau, Bingham-Papanastasiou, Herschel-Bukley-Papanastasiou, and Casson-Papanastasiou.

The following model parameters are required for the **Power law**:

- **Fluid consistency coefficient** m
- **Flow behavior index** n
- **Lower shear rate limit** $\dot{\gamma}_{\min}$

For the **Carreau model**, the following parameters are required:

- **Zero shear rate viscosity** μ_0
- **Infinite shear rate viscosity** μ_{inf}
- **Model parameter** λ and n

For the **Bingham-Papanastasiou model**, the following parameters are required:

- **Plastic viscosity** μ_p
- **Yield stress** τ_y
- **Model parameter** m_p

For the **Herschel-Bukley-Papanastasiou model**, the following parameters are required:

- **Fluid consistency coefficient** m
- **Flow behavior index** n
- **Yield stress** τ_y
- **Model parameter** m_p

For the **Casson-Papanastasiou model**, the following parameters are required:

- **Plastic viscosity** μ_p
- **Yield stress** τ_y
- **Model parameter** m_p



- [Non-Newtonian Flow](#) in the *CFD Module User's Guide*

Volume Force

The **Volume Force** node specifies the volume force \mathbf{F} on the right-hand side of the momentum equation.

$$\rho \frac{\partial \mathbf{u}}{\partial t} + \rho(\mathbf{u} \cdot \nabla)\mathbf{u} = \nabla \cdot \left[-p\mathbf{I} + \mu(\nabla\mathbf{u} + (\nabla\mathbf{u})^T) - \frac{2}{3}\mu(\nabla \cdot \mathbf{u})\mathbf{I} \right] + \mathbf{F}$$

If several volume-force nodes are added to the same domain, then the sum of all contributions are added to the momentum equation.

Initial Values

The initial values serve as initial conditions for a transient simulation or as an initial guess for a nonlinear solver in a stationary simulation. Note that for a transient compressible-flow simulation employing a material for which the density depends on the pressure (such as air), discontinuities in the initial values trigger pressure waves even when the Mach number is small. The pressure waves must be resolved and this puts a restriction on the time step.

INITIAL VALUES

Initial values or expressions should be specified for the **Velocity field \mathbf{u}** and the **Pressure p** .

Wall

The **Wall** node includes a set of boundary conditions describing fluid-flow conditions at stationary, moving, and leaking walls.

BOUNDARY CONDITION

Select a **Boundary condition** for the wall.

- [No Slip](#)
- [Slip](#)
- [Electroosmotic Velocity](#)
- [Slip Velocity](#)
- [Leaking Wall](#)
- [Navier Slip](#)

No Slip

No slip is the default boundary condition to model solid walls. A no slip wall is a wall where the fluid velocity relative to the wall velocity is zero. For a stationary wall that means that $\mathbf{u} = 0$.

Slip

The **Slip** option prescribes a no-penetration condition, $\mathbf{u} \cdot \mathbf{n} = 0$. It is implicitly assumed that there are no viscous effects at the slip wall and hence, no boundary layer develops. From a modeling point of view, this can be a reasonable approximation if the main effect of the wall is to prevent fluid from leaving the domain.

Electroosmotic Velocity

When an electric field drives a flow along the boundary, the components for the **Electric field** \mathbf{E} along with the **Electroosmotic mobility** μ_{eo} should be defined. The **Built-in expression** for the **Electroosmotic mobility** requires values or expressions for the **Zeta potential** ζ and the **Relative permittivity** ϵ_r .

Slip Velocity

In the microscale range, the flow condition at a boundary is seldom strictly no slip or slip. Instead, the boundary condition is something in between, and there is a **Slip velocity** at the boundary. Two phenomena account for this velocity: noncontinuum effects and the flow induced by a thermal gradient along the boundary.

When the **Use viscous slip** check box is selected, the default **Slip length** L_s is **User defined**. Another value or expression may be entered if the default value is not applicable. For **Maxwell's model** values or expressions for the **Tangential momentum accommodation coefficient** a_v and the **Mean free path** λ should be specified. Tangential accommodation coefficients are typically in the range of 0.85 to 1.0 and can be found in G. Kariadakis, A. Beskok, and N. Aluru, *Microflows and Nanoflows*, Springer Science and Business Media, 2005.

When the **Use thermal creep** check box is selected, a thermal creep contribution with **Thermal slip coefficient** σ_T is activated. Thermal slip coefficients are typically between 0.3 and 1.0 and can be found in G. Kariadakis, A. Beskok, and N. Aluru, *Microflows and Nanoflows*, Springer Science and Business Media, 2005.

Navier Slip

This boundary condition enforces no-penetration at the wall, $\mathbf{u} \cdot \mathbf{n}_{\text{wall}} = 0$, and adds a friction force of the form

$$\mathbf{F}_{\text{fr}} = -\frac{\mu}{\beta} \mathbf{u}_{\text{tang}}$$

where β is a slip length, and $\mathbf{u}_{\text{tang}} = \mathbf{u} - (\mathbf{u} \cdot \mathbf{n}_{\text{wall}})\mathbf{n}_{\text{wall}}$ is the velocity tangential to the wall. The boundary condition does not set the tangential velocity component to zero; however, the extrapolated tangential velocity component is 0 at a distance β outside of the wall.

The **Slip Length** setting is per default set to **Factor of minimum element length**. The slip length β is then defined as $\beta = f_h h_{\min}$, where h_{\min} is the smallest element side (corresponds to the element size in the wall normal direction for boundary layer elements) and f_h is a user input. Select **User defined** from **Slip Length** selection list in order to manually prescribe β (SI unit: m).

In cases where the wall movement is nonzero, check **Account for the translational wall velocity in the friction force** to use $(\mathbf{u} - \mathbf{u}_{\text{bnd}} - ((\mathbf{u} - \mathbf{u}_{\text{bnd}}) \cdot \mathbf{n}_{\text{wall}})\mathbf{n}_{\text{wall}})$ instead of \mathbf{u}_{tang} in the friction force. Then, the extrapolated tangential velocity component is \mathbf{u}_{bnd} at a distance β outside of the wall. Note that the **Velocity of sliding wall** \mathbf{u}_w is always accounted for in the friction force.

The Navier Slip boundary condition is suitable for walls adjacent to a fluid-fluid interface or a free surface when solving for laminar flow. Applying this boundary condition, the contact line (fluid-fluid-solid interface) is free to move along the wall. Note that in problems with contact lines, the tangential velocity of the wall typically represents the movement of the contact line but the physical wall is not moving. In such cases, **Account for the translational wall velocity in the friction force** should not be checked.

The Navier Slip option is not available when selecting a turbulence model.

Leaking Wall

This boundary condition may be used to simulate a wall where fluid is leaking into or leaving the domain with the velocity $\mathbf{u} = \mathbf{u}_1$ through a perforated wall. The components of the **Fluid velocity** \mathbf{u}_1 on the leaking wall should be specified.

WALL MOVEMENT

This section contains controls to describe the wall movement relative to the lab (or spatial) frame.

The **Translational velocity** setting controls the translational wall velocity, \mathbf{u}_{tr} . The list is per default set to **Automatic from frame**. The physics automatically detects if the spatial frame moves. This can for example happen if an ALE interface is present in the model component. If there is no movement $\mathbf{u}_{\text{tr}} = \mathbf{0}$. If the frame moves, \mathbf{u}_{tr} becomes equal to the frame movement. \mathbf{u}_{tr} is accounted for in the actual boundary condition prescribed in the **Boundary condition** section.

Select **Zero (Fixed wall)** from **Translational velocity** selection list to prescribe $\mathbf{u}_{\text{tr}} = \mathbf{0}$.


Select **Manual** from **Translational velocity** selection list in order to manually prescribe **Velocity of moving wall**, \mathbf{u}_{tr} . This can for example be used to model an oscillating wall

where the magnitude of the oscillations are very small compared to the rest of the model. Specifying translational velocity manually does not automatically cause the associated wall to move. An additional Moving Mesh interface needs to be added to physically track the wall movement in the spatial reference frame.

The **Sliding wall** option is appropriate if the wall behaves like a conveyor belt; that is, the surface is sliding in its tangential direction. A velocity is prescribed at the wall and the boundary itself does not have to actually move relative to the reference frame.

- For 3D components, values or expressions for the **Velocity of sliding wall** \mathbf{u}_w should be specified. If the velocity vector entered is not in the plane of the wall, COMSOL Multiphysics projects it onto the tangential direction. Its magnitude is adjusted to be the same as the magnitude of the vector entered.
- For 2D components, the tangential direction is unambiguously defined by the direction of the boundary. For this reason, the sliding wall boundary condition has different definitions in different space dimensions. A single entry for the **Velocity of the tangentially moving wall** U_w should be specified in 2D.

CONSTRAINT SETTINGS

This section is displayed by clicking the **Show More Options** button () and selecting **Advanced Physics Options** in the **Show More Options** dialog box. The **Constraints** settings can be set to **Default**, **Use pointwise constraints**, **Use DG constraints**, or **Use weak constraints**. **Use mixed constraints** can be selected when imposing a no slip condition exactly.

Depending on the constraint method selected, the following settings are available:

- **Apply reaction terms on** can be set to **Individual dependent variables** (default) or **All physics (symmetric)**. This setting is not available when **Use DG constraints** is selected.
- Select **Elemental** (default) or **Nodal** under **Constraint method**. This setting is not available for **Use DG constraints** or **Use weak constraints**.



- [Theory for the Wall Boundary Condition](#)
 - [The Moving Mesh Interface in the *COMSOL Multiphysics Reference Manual*](#)
-

Inlet

This condition should be used on boundaries for which there is a net flow into the domain. To obtain a numerically well-posed problem, it is advisable to also consider the Outlet conditions when specifying an Inlet condition. For example, if the pressure is specified at the outlet, the velocity may be specified at the inlet, and vice versa. Specifying the velocity vector at both the inlet and the outlet may cause convergence difficulties.

BOUNDARY CONDITION

The available **Boundary condition** options for an inlet are **Velocity**, **Fully developed flow**, **Mass flow**, and **Pressure**. After selecting a **Boundary Condition** from the list, a section with the same or a similar name displays underneath. For example, if **Velocity** is selected, a **Velocity** section, where further settings are defined, is displayed.

VELOCITY

The **Normal inflow velocity** is specified as $\mathbf{u} = -\mathbf{n}U_0$, where \mathbf{n} is the boundary normal pointing out of the domain and U_0 is the normal inflow speed.

The **Velocity field** option sets the velocity vector to $\mathbf{u} = \mathbf{u}_0$. The components of the inlet velocity vector \mathbf{u}_0 should be defined for this choice.

PRESSURE CONDITIONS

This option specifies the normal stress, which in most cases is approximately equal to the pressure. If the reference pressure p_{ref} , defined at the physics interface level, is equal to 0, the value of the **Pressure** p_0 , at the boundary, is the absolute pressure. Otherwise, p_0 is the relative pressure at the boundary.

- The **Suppress backflow** option adjusts the inlet pressure locally in order to prevent fluid from exiting the domain through the boundary. If you clear the suppress backflow option, the inlet boundary can become an outlet depending on the pressure field in the rest of the domain.
- **Flow direction** controls in which direction the fluid enters the domain.
 - For **Normal flow**, it prescribes zero tangential velocity component.
 - For **User defined**, an **Inflow velocity direction** \mathbf{d}_u (dimensionless) should be specified. The magnitude of \mathbf{d}_u does not matter, only the direction. \mathbf{d}_u must point into the domain.

MASS FLOW

The mass flow at an inlet can be specified by the **Mass flow rate**, the **Pointwise mass flux**, the **Standard flow rate**, or the **Standard flow rate (SCCM)**.

Mass Flow Rate

The **Mass flow rate** option sets the integrated mass flow across the entire boundary, the **Normal mass flow rate** to a specific value, m . The mass flow is assumed to be parallel to the boundary normal, and the tangential flow velocity is set to zero.

For 2D components, the **Channel thickness** d_{bc} is used to define the area across which the mass flow occurs. This setting is not applied to the whole model. Line or surface integrals of the mass flow over the boundary evaluated during postprocessing or used in integration coupling operators do not include this scaling automatically. Such results should be appropriately scaled when comparing them with the specified mass flow.

Pointwise Mass Flux

The **Pointwise mass flux** sets the mass flow parallel to the boundary normal. The tangential flow velocity is set to zero. The mass flux is a model input, which means that COMSOL Multiphysics can take its value from another physics interface when available. When **User defined** is selected a value or function M_f should be specified for the **Mass flux**.

Standard Flow Rate

The **Standard flow rate** Q_{sv} sets a standard volumetric flow rate, according to the SEMI standard E12-0303. The mass flow rate is specified as the volumetric flow rate of a gas at standard density — the **Mean molar mass** M_n divided by a **Standard molar volume** V_m (that is, the volume of one mole of a perfect gas at standard pressure and standard temperature). The flow occurs across the whole boundary in the direction of the boundary normal and is computed by a surface (3D) or line (2D) integral. The tangential flow velocity is set to zero.

The standard density can be defined directly, or by specifying a standard pressure and temperature, in which case the ideal gas law is assumed. The options in the **Standard flow rate defined by** list are:

- **Standard density**, for which the **Standard molar volume** V_m should be specified.
- **Standard pressure and temperature**, for which the **Standard pressure** P_{st} and the **Standard temperature** T_{st} should be defined.

For 2D components, the **Channel thickness** d_{bc} is used to define the area across which the mass flow occurs. This setting is not applied to the whole model. Line or surface integrals of the mass flow over the boundary evaluated during postprocessing or used

in integration coupling operators do not include this scaling automatically. Such results should be appropriately scaled when comparing them with the specified mass flow.

Standard Flow Rate (SCCM)

The **Standard flow rate (SCCM)** boundary condition is equivalent to the **Standard flow rate** boundary condition, except that the flow rate is entered directly in SCCMs (standard cubic centimeters per minute) without the requirement to specify units. Here, the dimensionless **Number of SCCM units** Q_{sccm} should be specified.

FULLY DEVELOPED FLOW

The **Fully developed flow** option adds contributions to the inflow boundary, which force the flow towards the solution for a fully developed channel flow. The channel can be thought of as a virtual extrusion of the inlet cross section. The inlet boundary must hence be flat in order for the fully developed flow condition to work properly. In 2D axisymmetric models, the inlet normal must be parallel to the symmetry axis.


Select an option to control the flow rate at the inlet:

- **Average velocity**, U_{av} .
- **Flow rate**, V_0 . Two-dimensional models also require an **Entrance thickness**, D_z , which is the out-of-plane thickness of the extruded entrance channel.
- **Average pressure**, P_{av} . Observe that P_{av} is the average pressure on the inflow boundary.

The fully developed flow condition requires any volume force to be approximately aligned with the normal of the inlet boundary.

A fully developed flow boundary cannot be adjacent to any Interior Wall feature.

CONSTRAINT SETTINGS

This section is displayed by clicking the **Show** button () and selecting **Advanced Physics Options**.



- [Prescribing Inlet and Outlet Conditions](#)
 - [Normal Stress Boundary Condition](#)
-

Outlet

This condition should be used on boundaries for which there is a net outflow from the domain. To obtain a numerically well-posed problem, it is advisable to also consider

the Inlet conditions when specifying an Outlet condition. For example, if the velocity is specified at the inlet, the pressure may be specified at the outlet, and vice versa. Specifying the velocity vector at both the inlet and the outlet may cause convergence difficulties. Selecting appropriate outlet conditions for the Navier-Stokes equations is a nontrivial task. Generally, if there is something interesting happening at an outflow boundary, the computational domain should be extended to include this phenomenon.

BOUNDARY CONDITION

The available **Boundary condition** options for an outlet are **Pressure**, **Fully developed flow**, and **Velocity**.

PRESSURE CONDITIONS

This option specifies the normal stress, which in most cases is approximately equal to the pressure. The tangential stress component is set to zero. If the reference pressure p_{ref} , defined at the physics interface level, is equal to 0, the value of the **Pressure** p_0 , at the boundary, is the absolute pressure. Otherwise, p_0 is the relative pressure at the boundary.

- The **Normal flow** option changes the no tangential stress condition to a no tangential velocity condition. This forces the flow to exit (or enter) the domain perpendicularly to the outlet boundary.
- The **Suppress backflow** check box is selected by default. This option adjusts the outlet pressure in order to prevent fluid from entering the domain through the boundary.

VELOCITY

See the **Inlet** node **Velocity** section for the settings.

FULLY DEVELOPED FLOW

This boundary condition is applicable when the flow exits the domain into a long pipe or channel, at the end of which a flow profile is fully developed.

The channel can be thought of as a virtual extrusion of the outlet cross section. The outlet boundary must hence be flat in order for the fully developed flow condition to work properly. In 2D axisymmetric models, the outlet normal must be parallel to the symmetry axis.


Select an option to control the flow rate at the outlet:

- **Average velocity**, U_{av} .

- **Flow rate**, V_0 . Two-dimensional models also require an **Entrance thickness**, D_z , which is the out-of-plane thickness of the extruded entrance channel.
- **Average pressure**, P_{av} . Observe that P_{av} is the average pressure on the outflow.

The fully developed flow condition requires any volume force to be approximately aligned with the normal of the outlet boundary. A fully developed flow boundary cannot be adjacent to any Interior Wall feature.

CONSTRAINT SETTINGS

This section is displayed by clicking the **Show** button () and selecting **Advanced Physics Options**.



Prescribing Inlet and Outlet Conditions

Symmetry

The **Symmetry** boundary condition prescribes no penetration and vanishing shear stresses. The boundary condition is a combination of a Dirichlet condition and a Neumann condition:

$$\mathbf{u} \cdot \mathbf{n} = \mathbf{0}, \quad \left(-p\mathbf{I} + \left(\mu(\nabla\mathbf{u} + (\nabla\mathbf{u})^T) - \frac{2}{3}\mu(\nabla \cdot \mathbf{u})\mathbf{I} \right) \right) \mathbf{n} = \mathbf{0}$$

$$\mathbf{u} \cdot \mathbf{n} = \mathbf{0}, \quad (-p\mathbf{I} + \mu(\nabla\mathbf{u} + (\nabla\mathbf{u})^T))\mathbf{n} = \mathbf{0}$$

for the compressible and incompressible formulations. The Dirichlet condition takes precedence over the Neumann condition, and the above equations are equivalent to the following equation for both the compressible and incompressible formulations:


$$\mathbf{u} \cdot \mathbf{n} = \mathbf{0}, \quad \mathbf{K} - (\mathbf{K} \cdot \mathbf{n})\mathbf{n} = \mathbf{0}$$

$$\mathbf{K} = \mu(\nabla\mathbf{u} + (\nabla\mathbf{u})^T)\mathbf{n}$$

BOUNDARY SELECTION

For 2D axial symmetry, a boundary condition does not need to be defined for the symmetry axis at $r = 0$. The software automatically provides a condition that prescribes $u_r = 0$ and vanishing stresses in the z direction and adds an **Axial Symmetry** node that implements these conditions on the axial symmetry boundaries only.

CONSTRAINT SETTINGS

This section is displayed by clicking the **Show** button () and selecting **Advanced Physics Options**.

Open Boundary

The **Open Boundary** condition describes boundaries in contact with a large volume of fluid. Fluid can both enter and leave the domain on boundaries with this type of condition.

BOUNDARY CONDITIONS

The **Boundary condition** options for open boundaries are **Normal stress** and **No viscous stress**.

Normal Stress

The **Normal stress** f_0 condition implicitly imposes $p \approx f_0$.

No Viscous Stress

The **No Viscous Stress** condition specifies vanishing viscous stress on the boundary. This condition does not provide sufficient information to fully specify the flow at the open boundary and must at least be combined with pressure constraints at adjacent points.

The **No viscous stress** condition prescribes:

$$\left(\mu(\nabla \mathbf{u} + (\nabla \mathbf{u})^T) - \frac{2}{3}\mu(\nabla \cdot \mathbf{u})\mathbf{I} \right) \mathbf{n} = \mathbf{0}$$

$$\mu(\nabla \mathbf{u} + (\nabla \mathbf{u})^T) \mathbf{n} = \mathbf{0}$$

for the compressible and the incompressible formulations. This condition can be useful in some situations because it does not impose any constraint on the pressure. A typical example is a model with volume forces that give rise to pressure gradients that are hard to prescribe in advance. To make the model numerically stable, this boundary condition should be combined with a point constraint on the pressure.

Boundary Stress

The **Boundary Stress** node adds a boundary condition that represents a general class of conditions also known as traction boundary conditions.

BOUNDARY CONDITION

The **Boundary condition** options for the boundary stress are **General stress**, **Normal stress**, and **Normal stress, normal flow**.

General Stress

When **General stress** is selected, the components for the **Stress \mathbf{F}** should be specified. The total stress on the boundary is set equal to the given stress \mathbf{F} :

$$\left(-p\mathbf{I} + \left(\mu(\nabla\mathbf{u} + (\nabla\mathbf{u})^T) - \frac{2}{3}\mu(\nabla \cdot \mathbf{u})\mathbf{I}\right)\right)\mathbf{n} = \mathbf{F}$$

$$(-p\mathbf{I} + \mu(\nabla\mathbf{u} + (\nabla\mathbf{u})^T))\mathbf{n} = \mathbf{F}$$

for the compressible and the incompressible formulations.

This boundary condition implicitly sets a constraint on the pressure that for 2D flows is

$$p = 2\mu \frac{\partial u_n}{\partial n} - \mathbf{n} \cdot \mathbf{F} \quad (4-2)$$

If $\partial u_n / \partial n$ is small, [Equation 4-2](#) states that $p \approx -\mathbf{n} \cdot \mathbf{F}$.

Normal Stress

Normal Stress is described for the Open Boundary node.

Normal Stress, Normal Flow

For **Normal stress, normal flow**, the magnitude of the **Normal stress f_0** should be specified. The tangential velocity is set to zero on the boundary:

$$\mathbf{n}^T \left(-p\mathbf{I} + \left(\mu(\nabla\mathbf{u} + (\nabla\mathbf{u})^T) - \frac{2}{3}\mu(\nabla \cdot \mathbf{u})\mathbf{I}\right)\right)\mathbf{n} = -f_0, \quad \mathbf{t} \cdot \mathbf{u} = 0$$

$$\mathbf{n}^T (-p\mathbf{I} + \mu(\nabla\mathbf{u} + (\nabla\mathbf{u})^T))\mathbf{n} = -f_0, \quad \mathbf{t} \cdot \mathbf{u} = 0$$


for the compressible and the incompressible formulations.

This boundary condition implicitly sets a constraint on the pressure that for 2D flows is

$$p = 2\mu \frac{\partial u_n}{\partial n} + f_0 \quad (4-3)$$

If $\partial u_n / \partial n$ is small, [Equation 4-3](#) states that $p \approx f_0$.

CONSTRAINT SETTINGS

This section is displayed by clicking the **Show** button () and selecting **Advanced Physics Options**.

If **Normal Stress, Normal Flow** is selected as the **Boundary condition**, then to **Apply reaction terms on** all dependent variables, the **All physics (symmetric)** option should be selected. Alternatively, the **Individual dependent variables** could be selected to restrict the reaction terms as needed.

Periodic Flow Condition

The **Periodic Flow Condition** splits its selection into a source group and a destination group. Fluid that leaves the domain through one of the destination boundaries enters the domain through the corresponding source boundary. This corresponds to a situation where the geometry is a periodic part of a larger geometry. If the boundaries are not parallel to each other, the velocity vector is automatically transformed.

If the boundaries are curved, the orientation of the source must be specified manually (see [Orientation of Source](#)).

No input is required when **Compressible flow (Ma<0.3)** is selected for **Compressibility** under the **Physical Model** section for the physics interface. Typically when a periodic boundary condition is used with a compressible flow, the pressure is the same at both boundaries and the flow is driven by a volume force.


PRESSURE DIFFERENCE

This section is available when **Incompressible flow** is selected for **Compressibility** under the **Physical Model** section for the physics interface.

A value or expression should be specified for the **Pressure difference**, $p_{\text{src}} - p_{\text{dst}}$. This pressure difference can, for example, drive the fully developed flow in a channel.

To set up a periodic boundary condition, both boundaries must be selected in the **Periodic Flow Condition** node. COMSOL Multiphysics automatically assigns one boundary as the source and the other as the destination. To manually set the destination selection, a **Destination Selection** subnode is available from the context menu (by right-clicking the parent node) or from the **Physics** toolbar, **Attributes** menu. All destination sides must be connected.

CONSTRAINT SETTINGS

This section is displayed by clicking the **Show** button () and selecting **Advanced Physics Options**.

ORIENTATION OF SOURCE

For information about the **Orientation of Source** section, see [Orientation of Source and Destination](#) in the *COMSOL Multiphysics Reference Manual*.

Interior Wall

The **Interior Wall** boundary condition can only be applied on interior boundaries.

It is similar to the [Wall](#) boundary condition available on exterior boundaries except that it applies on both sides of an interior boundary. It allows discontinuities (velocity, pressure, and turbulence variables) across the boundary. The **Interior Wall** boundary condition can be used to avoid meshing thin structures by applying no-slip conditions on interior curves and surfaces instead. Slip conditions and conditions for a moving wall can also be prescribed. It is compatible with laminar and turbulent flow.

BOUNDARY CONDITION

The following **Boundary condition** options are available.

No Slip

The **No slip** condition models solid walls. No slip walls are walls where the fluid velocity relative to the wall is zero. For a interior stationary wall this means that $\mathbf{u} = 0$ on both sides of the wall.

For turbulent flows, the no slip conditions may either be prescribed exactly or modeled using automatic wall treatment or wall functions depending on the **Wall Treatment** setting in the **Turbulence** section of the interface settings.

When **Wall Treatment** is set to **Wall functions**, the **Apply wall roughness** option becomes available. When **Apply wall roughness** is selected, a **Sand roughness** model, derived from the experiments by Nikuradse, is applied. Select **Generic roughness** in order to specify more general roughness types.

- For **Sand roughness** an **Equivalent sand roughness height** k_{seq} should be specified.
- For **Generic roughness** a **Roughness height** k_s and a dimensionless **Roughness parameter** C_s should be specified.

Slip

The **Slip** condition prescribes a no-penetration condition, $\mathbf{u} \cdot \mathbf{n} = 0$. It implicitly assumes that there are no viscous effects on either side of the slip wall and hence, no boundary layer develops. From a modeling point of view, this can be a reasonable approximation if the important effect is to prevent the exchange of fluid between the regions separated by the interior wall.

Navier Slip

The **Navier slip** condition enforces no-penetration at the wall, $\mathbf{u} \cdot \mathbf{n}_{\text{wall}} = 0$, and adds a friction force of the form

$$\mathbf{F}_{\text{fr}} = -\frac{\mu}{\beta} \mathbf{u}$$

where β is a slip length. For more information, see the **Navier Slip** option in the [Wall](#) feature.

WALL MOVEMENT


This section contains controls to describe the wall movement relative to the lab (or spatial) frame.

The **Translational velocity** setting controls the translational wall velocity, \mathbf{u}_{tr} . The list is per default set to **Automatic from frame**. The physics automatically detects if the spatial frame moves. This can for example happen if an ALE interface is present in the model component. If there is no movement $\mathbf{u}_{\text{tr}} = \mathbf{0}$. If the frame moves, \mathbf{u}_{tr} becomes equal to the frame movement. \mathbf{u}_{tr} is accounted for in the actual boundary condition prescribed in the **Boundary condition** section.

Select **Zero (Fixed wall)** from **Translational velocity** selection list to prescribe $\mathbf{u}_{\text{tr}} = \mathbf{0}$.

Select **Manual** from **Translational velocity** selection list in order to manually prescribe **Velocity of moving wall**, \mathbf{u}_{tr} . This can for example be used to model an oscillating wall where the magnitude of the oscillations are very small compared to the rest of the model. Specifying translational velocity manually does not automatically cause the associated wall to move. An additional Moving Mesh interface needs to be added to physically track the wall movement in the spatial reference frame.

CONSTRAINT SETTINGS

This section is displayed by clicking the **Show** button () and selecting **Advanced Physics Options**. The **Constraints** settings can be set to **Default**, **Use pointwise constraints**, or **Use DG constraints**. **Use mixed constraints** can be selected when imposing a no slip condition exactly.

Flow Continuity

The **Flow Continuity** condition is suitable for pairs where the boundaries match; it prescribes that the flow field is continuous across the pair.

A **Wall** subnode is added by default and it applies to the parts of the pair boundaries where a source boundary lacks a corresponding destination boundary and vice versa. The **Wall** feature can be overridden by any other boundary condition that applies to exterior boundaries. By right-clicking the **Flow Continuity** node, additional Fallback feature subnodes can be added.

The **Wall** fallback condition is incompatible with the **Low Re** wall treatment for the $k-\omega$, SST, and Low Reynolds number $k-\epsilon$ turbulence models.


Pressure Point Constraint

The **Pressure Point Constraint** condition can be used to specify the pressure level. If it is not possible to specify the pressure level using a boundary condition, the pressure level must be set in some other way, for example, by specifying a fixed pressure at a point.

PRESSURE CONSTRAINT

The relative pressure value is set by specifying the **Pressure** p_0 . Or, if the reference pressure p_{ref} defined at the physics interface level is equal to zero, p_0 represents the absolute pressure.

CONSTRAINT SETTINGS

This section is displayed by clicking the **Show** button () and selecting **Advanced Physics Options**.

The **Apply reaction terms on** setting is set per default to **Individual dependent variables**. **All physics (symmetric)** cannot be used together with a segregated solver when fluid flow is coupled with Moving Mesh, Level Set, or Phase Field.

Point Mass Source

This feature requires at least one of the following licenses: Batteries & Fuel Cells Module, CFD Module, Chemical Reaction Engineering Module, Corrosion Module, Electrochemistry Module, Electrodeposition Module, Microfluidics Module, Pipe Flow Module, or Subsurface Flow Module.

The **Point Mass Source** feature models mass flow originating from an infinitely small domain centered around a point

For the Reacting Flow in Porous Media, Diluted Species interface, which is available with the CFD Module, Chemical Reaction Engineering Module, or Batteries & Fuel Cells Module, there are two nodes: one for the fluid flow (**Fluid Point Source**) and one for the species (**Species Point Source**).

SOURCE STRENGTH

The source **Mass flux**, \dot{q}_p should be specified. A positive value results in mass being ejected from the point into the computational domain. A negative value results in mass being removed from the computational domain.

Point sources located on a boundary or on an edge affect the adjacent computational domains. This has the effect, for example, that a point source located on a symmetry plane has twice the given strength.



[Mass Sources for Fluid Flow](#) in the *COMSOL Multiphysics Reference Manual*

Line Mass Source

This feature requires at least one of the following licenses: Batteries & Fuel Cells Module, CFD Module, Chemical Reaction Engineering Module, Corrosion Module, Electrochemistry Module, Electrodeposition Module, Microfluidics Module, Pipe Flow Module, or Subsurface Flow Module.

The **Line Mass Source** feature models mass flow originating from a tube region with infinitely small radius.

For the Reacting Flow in Porous Media, Diluted Species interface, which is available with the CFD Module, Chemical Reaction Engineering Module, or Batteries & Fuel Cells Module, there are two nodes, one for the fluid flow (**Fluid Line Source**) and one for the species (**Species Line Source**).

SELECTION

The **Line Mass Source** feature is available for all dimensions, but the applicable selection differs between the dimensions.

MODEL DIMENSION	APPLICABLE GEOMETRICAL ENTITY
2D	Points
2D Axisymmetry	Points not on the axis of symmetry
3D	Edges

SOURCE STRENGTH

The source **Mass flux**, \dot{q}_1 , should be specified. A positive value results in mass being ejected from the line into the computational domain and a negative value means that mass is removed from the computational domain.

Line sources located on a boundary affect the adjacent computational domains. This, for example, has the effect that a line source located on a symmetry plane has twice the given strength.



[Mass Sources for Fluid Flow](#) in the *COMSOL Multiphysics Reference Manual*

Gravity

This feature requires at least one of the following licenses: CFD Module, Heat Transfer Module.

The **Gravity** global feature is automatically added when **Include gravity** is selected at the interface level in the **Physical Model** settings. It defines the gravity forces from the **Acceleration of gravity** value. When a turbulence model that solves for the turbulent kinetic energy, k , is used, the option **Include buoyancy-induced turbulence** is available. When selected, the **Buoyancy contribution** is by default set to **Automatic from multiphysics**. Contributions are only obtained from multiphysics couplings that support buoyancy-induced turbulence, such as Nonisothermal Flow. If the **Buoyancy contribution** is switched to **User defined**, an edit field for the **Turbulent Schmidt number** appears. See also [Theory for Buoyancy-Induced Turbulence](#) in the *CFD Module User's Guide*.

ACCELERATION OF GRAVITY

The **Acceleration of gravity** (SI unit m/s, default value $-g_{\text{const}}\mathbf{e}_z$ in 2D axial symmetry and 3D and $-g_{\text{const}}\mathbf{e}_y$ in 2D) is used to define the gravity forces. It should be a global quantity.

Theory for the Single-Phase Flow Interfaces

The theory for the Single-Phase Flow, Laminar Flow and Viscoelastic Flow interfaces is described in this section:

- [General Single-Phase Flow Theory](#)
- [Compressible Flow](#)
- [Weakly Compressible Flow](#)
- [The Mach Number Limit](#)
- [Incompressible Flow](#)
- [The Reynolds Number](#)
- [Non-Newtonian Flow](#)
- [Theory for the Wall Boundary Condition](#)
- [Prescribing Inlet and Outlet Conditions](#)
- [Mass Flow](#)
- [Fully Developed Flow \(Inlet\)](#)
- [Fully Developed Flow \(Outlet\)](#)
- [No Viscous Stress](#)
- [Normal Stress Boundary Condition](#)
- [Mass Sources for Fluid Flow](#)
- [Numerical Stability — Stabilization Techniques for Fluid Flow](#)
- [Solvers for Laminar Flow](#)
- [Pseudo Time Stepping for Laminar Flow Models](#)
- [Discontinuous Galerkin Formulation](#)
- [Particle Tracing in Fluid Flow](#)
- [References for the Single-Phase Flow, Laminar Flow Interfaces](#)



The theory about most boundary conditions is found in [Ref. 2](#).

General Single-Phase Flow Theory

The Single-Phase Fluid Flow interfaces are based on the Navier-Stokes equations, which in their most general form read

$$\frac{\partial \rho}{\partial t} + \nabla \cdot (\rho \mathbf{u}) = 0 \quad (4-4)$$

$$\rho \frac{\partial \mathbf{u}}{\partial t} + \rho (\mathbf{u} \cdot \nabla) \mathbf{u} = \nabla \cdot [-p \mathbf{I} + \boldsymbol{\tau}] + \mathbf{F} \quad (4-5)$$

$$\rho C_p \left(\frac{\partial T}{\partial t} + (\mathbf{u} \cdot \nabla) T \right) = -(\nabla \cdot \mathbf{q}) + \boldsymbol{\tau} : \mathbf{S} - \frac{T}{\rho} \frac{\partial \rho}{\partial T} \bigg|_p \left(\frac{\partial p}{\partial t} + (\mathbf{u} \cdot \nabla) p \right) + Q \quad (4-6)$$

where

- ρ is the density (SI unit: kg/m³)
- \mathbf{u} is the velocity vector (SI unit: m/s)
- p is pressure (SI unit: Pa)
- $\boldsymbol{\tau}$ is the viscous stress tensor (SI unit: Pa)
- \mathbf{F} is the volume force vector (SI unit: N/m³)
- C_p is the specific heat capacity at constant pressure (SI unit: J/(kg·K))
- T is the absolute temperature (SI unit: K)
- \mathbf{q} is the heat flux vector (SI unit: W/m²)
- Q contains the heat sources (SI unit: W/m³)
- \mathbf{S} is the strain-rate tensor:

$$\mathbf{S} = \frac{1}{2} (\nabla \mathbf{u} + (\nabla \mathbf{u})^T)$$

The operation “:” denotes a contraction between tensors defined by

$$\mathbf{a} : \mathbf{b} = \sum_n \sum_m a_{nm} b_{nm} \quad (4-7)$$

This is sometimes referred to as the double dot product.

Equation 4-4 is the continuity equation and represents conservation of mass.

Equation 4-5 is a vector equation which represents conservation of momentum.

Equation 4-6 describes the conservation of energy, formulated in terms of

temperature. This is an intuitive formulation that facilitates boundary condition specifications.

To close the equation system, Equation 4-4 through Equation 4-6, constitutive relations are needed. For a Newtonian fluid, which has a linear relationship between stress and strain, Stokes (Ref. 1) deduced the following expression:

$$\boldsymbol{\tau} = 2\mu\mathbf{S} - \frac{2}{3}\mu(\nabla \cdot \mathbf{u})\mathbf{I} \quad (4-8)$$

The dynamic viscosity, μ (SI unit: Pa·s), for a Newtonian fluid is allowed to depend on the thermodynamic state but not on the velocity field. All gases and many liquids can be considered Newtonian. Examples of non-Newtonian fluids are honey, mud, blood, liquid metals, and most polymer solutions. With the Microfluidics Module, you can model flows of non-Newtonian fluids using the predefined constitutive models. The following models which describe the stress-strain relationship for non-Newtonian fluids are available: Power law, Carreau, Bingham-Papanastasiou, Herschel-Bukley-Papanastasiou, and Casson-Papanastasiou. The Heat Transfer Module treats all fluids as Newtonian according to Equation 4-8. Other commonly used constitutive relations are Fourier's law of heat conduction and the ideal gas law.

In theory, the same equations describe both laminar and turbulent flows. In practice, however, the mesh resolution required to simulate turbulence with the Laminar Flow interface makes such an approach impractical.



There are several books where derivations of the Navier-Stokes equations and detailed explanations of concepts such as Newtonian fluids can be found. See, for example, the classical text by Batchelor (Ref. 3) and the more recent work by Panton (Ref. 4).

Many applications describe isothermal flows for which Equation 4-6 is decoupled from Equation 4-4 and Equation 4-5.

2D AXISYMMETRIC FORMULATIONS

A 2D axisymmetric formulation of Equation 4-4 and Equation 4-5 requires $\partial/\partial\phi$ to be zero. That is, there must be no gradients in the azimuthal direction. A common additional assumption is, however, that $u_\phi = 0$. In such cases, the ϕ -equation can be removed from Equation 4-5. The resulting system of equations is both easier to converge and computationally less expensive compared to retaining the ϕ -equation.

The default 2D axisymmetric formulation of [Equation 4-4](#) and [Equation 4-5](#) therefore assumes that

$$\begin{aligned}\partial/\partial\phi &= 0 \\ \mathbf{u}_\phi &= 0\end{aligned}$$

Compressible Flow

The equations of motion for a single-phase fluid are the continuity equation:

$$\frac{\partial\rho}{\partial t} + \nabla \cdot (\rho\mathbf{u}) = 0 \quad (4-9)$$

and the momentum equation:

$$\rho\frac{\partial\mathbf{u}}{\partial t} + \rho\mathbf{u} \cdot \nabla\mathbf{u} = -\nabla p + \nabla \cdot \left(\mu(\nabla\mathbf{u} + (\nabla\mathbf{u})^T) - \frac{2}{3}\mu(\nabla \cdot \mathbf{u})\mathbf{I} \right) + \mathbf{F} \quad (4-10)$$

These equations are applicable for incompressible as well as for compressible flow with density and viscosity variations.

Weakly Compressible Flow

The same equations as for [Compressible Flow](#) are applied for weakly compressible flow. The only difference is that the density is evaluated at the reference pressure. The density may be a function of other quantities, in particular it may be temperature dependent.

The weakly compressible flow equations are valid for incompressible as well as compressible flow with density variations independent of the pressure.

Provided that the densities dependency pressure is specified through model inputs, the density is automatically evaluated at the reference pressure level.

The Mach Number Limit

An important dimensionless number in fluid dynamics is the Mach number, Ma , defined by

$$\text{Ma} = \frac{|\mathbf{u}|}{a}$$

where a is the speed of sound. A flow is formally incompressible when $Ma = 0$. This is theoretically achieved by letting the speed of sound tend to infinity. The Navier-Stokes equations then have the mathematical property that pressure disturbances are instantaneously propagated throughout the entire domain. This results in a parabolic equation system.

The momentum equation, Equation 4-10, is parabolic for unsteady flow and elliptic for steady flow, whereas the continuity equation, Equation 4-9, is hyperbolic for both steady and unsteady flow. The combined system of equations is thus hybrid parabolic-hyperbolic for unsteady flow and hybrid elliptic-hyperbolic for steady flow. An exception occurs when the viscous term in Equation 4-10 becomes vanishingly small, such as at an outflow boundary, in which case the momentum equation becomes locally hyperbolic. The number of boundary conditions to apply on the boundary then depends on the number of characteristics propagating into the computational domain. For the purely hyperbolic system, the number of characteristics propagating from the boundary into the domain changes as the Mach number passes through unity. Hence, the number of boundary conditions required to obtain a numerically well-posed system must also change. The compressible formulation of the laminar and turbulent interfaces uses the same boundary conditions as the incompressible formulation, which implies that the compressible interfaces are not suitable for flows with a Mach number larger than or equal to one.

The practical Mach number limit is lower than one, however. The main reason is that the numerical scheme (stabilization and boundary conditions) of the Laminar Flow interface does not recognize the direction and speed of pressure waves. The fully compressible Navier-Stokes equations do, for example, start to display very sharp gradients already at moderate Mach numbers. But the stabilization for the single-phase flow interface does not necessarily capture these gradients. It is impossible to give an exact limit where the low Mach number regime ends and the moderate Mach number regime begins, but a rule of thumb is that the Mach number effects start to appear at $Ma = 0.3$. For this reason, the compressible formulation is referred to as *Compressible flow* ($Ma < 0.3$) in COMSOL Multiphysics.

Incompressible Flow

When the temperature variations in the flow are small, a single-phase fluid can often be assumed incompressible; that is, ρ is constant or nearly constant. This is the case for all liquids under normal conditions and also for gases at low velocities. For constant ρ , Equation 4-9 reduces to

$$\rho \nabla \cdot \mathbf{u} = 0 \quad (4-11)$$

and Equation 4-10 becomes

$$\rho \frac{\partial \mathbf{u}}{\partial t} + \rho (\mathbf{u} \cdot \nabla) \mathbf{u} = \nabla \cdot [-p \mathbf{I} + \mu (\nabla \mathbf{u} + (\nabla \mathbf{u})^T)] + \mathbf{F} \quad (4-12)$$

Provided that the densities dependency on temperature and pressure is specified through model inputs, the density is evaluated at the reference pressure level and at the reference temperature. However, if the density is a function of other quantities such as a concentration field, or if the density is specified by a user defined expression, the user has to make sure that the density is defined as constant when the incompressible flow formulation is used.

The Reynolds Number

A fundamental characteristic in analyses of fluid flow is the Reynolds number:

$$\text{Re} = \frac{\rho U L}{\mu}$$

where U denotes a velocity scale, and L denotes a representative length. The Reynolds number represents the ratio between inertial and viscous forces. At low Reynolds numbers, viscous forces dominate and tend to damp out all disturbances, which leads to laminar flow. At high Reynolds numbers, the damping in the system is very low, giving small disturbances the possibility to grow by nonlinear interactions. If the Reynolds number is high enough, the flow field eventually ends up in a chaotic state called turbulence.

Observe that the Reynolds number can have different meanings depending on the length scale and velocity scale. To be able to compare two Reynolds numbers, they must be based on equivalent length and velocity scales.

The Fluid Flow interfaces automatically calculate the local cell Reynolds number $\text{Re}^c = \rho |\mathbf{u}| h / (2\mu)$ using the element length h for L and the magnitude of the velocity vector \mathbf{u} for the velocity scale U . This Reynolds number is not related to the character of the flow field, but to the stability of the numerical discretization. The risk for numerical oscillations in the solution increases as Re^c grows. The cell Reynolds number is a predefined quantity available for visualization and evaluation (typically it is available as: `spf.cellRe`).

For the Newtonian fluid, the viscous stress tensor is proportional to the strain rate tensor, and the constitutive relation is written as:

$$\boldsymbol{\tau} = 2\mu\mathbf{S} - \frac{2}{3}\mu(\nabla \cdot \mathbf{u})\mathbf{I}$$

$$\boldsymbol{\tau} = 2\mu\mathbf{S}$$

using the compressible and incompressible formulations. Here \mathbf{S} denotes the strain-rate tensor defined by:

$$\mathbf{S} = \frac{1}{2}(\nabla\mathbf{u} + (\nabla\mathbf{u})^T)$$

Its magnitude, the shear rate, is:

$$\dot{\gamma} = \sqrt{2\mathbf{S}:\mathbf{S}}$$

where the contraction operator “:” is defined by

$$\mathbf{a}:\mathbf{b} = \sum_n \sum_m a_{nm} b_{nm}$$

For non-Newtonian fluids, viscous stress versus shear rate curve is nonlinear or does not pass through the origin. The Laminar Flow interfaces provides five predefined inelastic non-Newtonian constitutive models: Power law, Carreau, Bingham-Papanastasiou, Herschel-Bukley-Papanastasiou, and Casson-Papanastasiou.

POWER LAW

The Power law model is an example of a generalized Newtonian model. It prescribes

$$\boldsymbol{\tau} = 2m\dot{\gamma}^{n-1}\mathbf{S} \tag{4-13}$$

where m and n are scalars that can be set to arbitrary values. For $n > 1$, the power law describes a shear thickening (dilatant) fluid. For $n < 1$, it describes a shear thinning (pseudoplastic) fluid. A value of n equal to one gives the expression for a *Newtonian fluid*.

[Equation 4-13](#) predicts an infinite viscosity at zero shear rate for $n < 1$. This is however never the case physically. Instead, most fluids have a constant viscosity for shear rates smaller than 10^{-2} s^{-1} ([Ref. 18](#)). Since infinite viscosity also makes models using

Equation 4-13 difficult to solve, COMSOL Multiphysics implements the Power law model as

$$\tau = 2m \max(\dot{\gamma}, \dot{\gamma}_{\min})^{n-1} \mathbf{S} \quad (4-14)$$

where $\dot{\gamma}_{\min}$ is a lower limit for the evaluation of the shear rate magnitude. The default value for $\dot{\gamma}_{\min}$ is 10^{-2} s^{-1} , but can be given an arbitrary value or expression using the corresponding text field.

CARREAU MODEL

The Carreau model defines the viscosity in terms of the following four-parameter expression

$$\tau = 2 \left(\mu_{\infty} + (\mu_0 - \mu_{\text{inf}}) [1 + (\lambda \dot{\gamma})^2]^{\frac{(n-1)}{2}} \right) \mathbf{S} \quad (4-15)$$

where λ is a parameter with the unit of time, μ_0 is the zero shear rate viscosity, μ_{inf} is the infinite shear-rate viscosity, and n is a dimensionless parameter. This expression is able to describe the viscosity for most stationary polymer flows.

BINGHAM-PAPANASTASIOU

Viscoplastic fluid behavior is characterized by existence of the yield stress τ_y — a limit which must be exceeded before significant deformation can occur. To model the stress-deformation behavior of viscoplastic materials, different constitutive equations have been propose. The Bingham plastic model is written as

$$\tau = 2 \left(\mu_p + \frac{\tau_y}{\dot{\gamma}} \right) \mathbf{S}, \quad |\tau| > \tau_y$$

where μ_p is the plastic viscosity.

To allow computation in both yielded and unyielded region, the Papanastasiou continuous regularization for the viscosity function is used:

$$\tau = 2 \left(\mu_p + \frac{\tau_y}{\dot{\gamma}} [1 - \exp(-m_p \dot{\gamma})] \right) \mathbf{S} \quad (4-16)$$

where m_p is a scale that controls the exponential growth of stress.

HERSCHEL-BULKLEY-PAPANASTASIOU

The Herschel-Bulkley -Papanastasiou model combines the effects of the Power law and Bingham behavior:

$$\tau = 2\left(m\dot{\gamma}^{n-1} + \frac{\tau_y}{\dot{\gamma}}[1 - \exp(-m_p\dot{\gamma})]\right)\mathbf{S} \quad (4-17)$$

where m and n are scalars that can be set to arbitrary values. For a value of n equal to one, the Bingham-Papanastasiou model is recovered. This equation is valid in both yielded and unyielded regions. The exponent m_p controls the smoothness of the viscosity function.

CASSON-PAPANASTASIOU

The Casson-Papanastasiou model combines Casson equation with Papanastasiou regularization:

$$\tau = 2\left(\sqrt{\mu_p} + \sqrt{\frac{\tau_y}{\dot{\gamma}}[1 - \exp(-\sqrt{m_p}\dot{\gamma})]}\right)^2 \mathbf{S} \quad (4-18)$$

The equation is valid in both yielded and unyielded regions.

Theory for the Wall Boundary Condition

See [Wall](#) for the node settings.

SLIP

The [Slip](#) condition assumes that there are no viscous effects at the slip wall and hence, no boundary layer develops. From a modeling point of view, this is a reasonable approximation if the important effect of the wall is to prevent fluid from leaving the domain. Mathematically, the constraint can be formulated as:

$$\mathbf{u} \cdot \mathbf{n} = 0, \quad (-p\mathbf{I} + \mu(\nabla\mathbf{u} + (\nabla\mathbf{u})^T))\mathbf{n} = \mathbf{0}$$

The no-penetration term takes precedence over the Neumann part of the condition and the above expression is therefore equivalent to

$$\begin{aligned} \mathbf{u} \cdot \mathbf{n} &= 0, & \mathbf{K} - (\mathbf{K} \cdot \mathbf{n})\mathbf{n} &= \mathbf{0} \\ \mathbf{K} &= \mu(\nabla\mathbf{u} + (\nabla\mathbf{u})^T)\mathbf{n} \end{aligned}$$

expressing that there is no flow across the boundary and no viscous stress in the tangential direction.

For a moving wall with translational velocity \mathbf{u}_{tr} , \mathbf{u} in the above equations is replaced by the relative velocity $\mathbf{u}_{rel} = \mathbf{u} - \mathbf{u}_{tr}$.

The boundary condition for v is $\tilde{\nabla} \mathbf{v} \cdot \mathbf{n} = 0$.

SLIDING WALL

The sliding wall option is appropriate if the wall behaves like a conveyor belt; that is, the surface is sliding in its tangential direction. The wall does not have to actually move in the coordinate system.

- In 2D, the tangential direction is unambiguously defined by the direction of the boundary, but the situation becomes more complicated in 3D. For this reason, this boundary condition has slightly different definitions in the different space dimensions.
- For 2D and 2D axisymmetric components, the velocity is given as a scalar U_w and the condition prescribes

$$\mathbf{u} \cdot \mathbf{n} = 0, \quad \mathbf{u} \cdot \mathbf{t} = U_w$$

where $\mathbf{t} = (n_y, -n_x)$ for 2D and $\mathbf{t} = (n_z, -n_r)$ for axial symmetry.

- For 3D components, the velocity is set equal to a given vector \mathbf{u}_w projected onto the boundary plane:

$$\mathbf{u} = \frac{\mathbf{u}_w - (\mathbf{n} \cdot \mathbf{u}_w)\mathbf{n}}{\|\mathbf{u}_w - (\mathbf{n} \cdot \mathbf{u}_w)\mathbf{n}\|} \|\mathbf{u}_w\|$$

The normalization makes \mathbf{u} have the same magnitude as \mathbf{u}_w even if \mathbf{u}_w is not exactly parallel to the wall.

SLIP VELOCITY

In the microscale range, the flow at a boundary is seldom strictly no slip or slip. Instead, the boundary condition is something in between, and there is a slip velocity at the boundary. Two phenomena account for this velocity: violation of the continuum hypothesis for the viscosity and flow induced by a thermal gradient along the boundary.

The following equation relates the viscosity-induced jump in tangential velocity to the tangential shear stress along the boundary:

$$\Delta u = \frac{1}{\beta} \tau_{n,t}$$

For gaseous fluids, the coefficient β is given by

$$\beta = \frac{\mu}{\left(\frac{2 - \alpha_v}{\alpha_v}\right)\lambda}$$

where μ is the fluid's dynamic viscosity (SI unit: Pa·s), α_v represents the tangential momentum accommodation coefficient (TMAC) (dimensionless), and λ is the molecules' mean free path (SI unit: m). The tangential accommodation coefficients are typically in the range of 0.85 to 1.0 and can be found in [Ref. 17](#).

A simpler expression for β is

$$\beta = \frac{\mu}{L_s}$$

where L_s , the slip length (SI unit: m), is a straight channel measure of the distance from the boundary to the virtual point outside the flow domain where the flow profile extrapolates to zero. This equation holds for both liquids and gases.

Thermal creep results from a temperature gradient along the boundary. The following equation relates the thermally-induced jump in tangential velocity to the tangential gradient of the natural logarithm of the temperature along the boundary:

$$\Delta u = \sigma_T \frac{\mu}{\rho} \nabla_t \log T$$

where σ_T is the thermal slip coefficient (dimensionless) and ρ is the density of the fluid. The thermal slip coefficients range between 0.3 and 1.0 and can be found in [Ref. 17](#).

Combining the previous relationships results in the following equation:

$$\mathbf{u} - \mathbf{u}_{w,t} = \frac{L_s}{\mu} \tau_{n,t} + \sigma_T \frac{\mu}{\rho T} \nabla_t T$$

Relate the tangential shear stress to the viscous boundary force by

$$\tau_{n,t} = \mathbf{K} - (\mathbf{n} \cdot \mathbf{K})\mathbf{n}$$

where the components of \mathbf{K} are the Lagrange multipliers that are used to implement the boundary condition. Similarly, the tangential temperature gradient results from the difference of the gradient and its normal projection:

$$\nabla_t T = \nabla T - (\mathbf{n} \cdot \nabla T)\mathbf{n}$$

Use *Viscous Slip*

When viscous slip is used, select Maxwell's model to calculate L_s using:

$$L_s = \left(\frac{2 - \alpha_v}{\alpha_v} \right) \lambda$$

Also see [Wall](#) for the node settings.

ELECTROOSMOTIC VELOCITY

Most solid surfaces acquire a surface charge when brought into contact with an electrolyte. In response to the spontaneously formed surface charge, a charged solution forms close to the liquid-solid interface. This is known as an electric double layer. If an electric field is applied to the fluid, this very narrow layer starts to move along the boundary.

It is possible to model the fluid's velocity near the boundary using the Helmholtz-Smoluchowski relationship between the electroosmotic velocity u and the applied electric field:

$$u = \mu_{eo} \mathbf{E}_t$$

where μ_{eo} is the electroosmotic mobility and \mathbf{E}_t is the fluid electric field tangential to the wall.

Built-in Expression

Use the Electroosmotic mobility μ_{eo} (SI unit: $\text{m}^2/(\text{s}\cdot\text{V})$) Built-in expression to compute the electroosmotic mobility from:

$$\mu_{eo} = -\epsilon_r \epsilon_0 \frac{\zeta}{\mu} \quad (4-19)$$

Here ϵ_r is the fluid's relative permittivity, ϵ_0 the permittivity of free space (SI unit F/m), which is a predefined physical constant, ζ is the fluid's zeta potential (SI unit: V), and μ the fluid's dynamic viscosity (Pa·s). Typically $\mu_{eo} \approx 7 \times 10^{-8} \text{m}^2/(\text{s}\cdot\text{V})$ and $\zeta \approx 100 \text{mV}$ (see H. Bruus, *Theoretical Microfluidics*, Oxford University Press, 2008). See [Wall](#) for the node settings.



Electroosmotic Micromixer: Application Library path
Microfluidics_Module/Micromixers/electroosmotic_mixer

CONSTRAINT SETTINGS

The wall feature uses three different techniques to constraint the velocity field:

- Pointwise constraints is the standard technique to enforce strong constraints in the finite element method. The desired value of the velocity is prescribed at each node point in the mesh. Since the constraint is enforced locally at each node, only local values are affected by the constraint and the constraints are independent of each other. The solvers can therefore eliminate both the constrained degrees of freedom and the constraint force terms, effectively reducing the number of degrees of freedom being solved for.

The main advantage of pointwise constraints is that they enforce the constraint exactly pointwise. This means that they do not introduce any leakage of the velocity across the wall, unless specified. The main disadvantage of pointwise constraints is that they introduce locking effects when trying to impose a no penetration condition for the velocity, $\mathbf{u} \cdot \mathbf{n} = 0$, on curved walls or walls with sharp corners.

- Using Weak constraints is an alternative method to prescribe the velocity. It consists on enforcing the boundary condition for the velocity via *Lagrange multipliers*. Their main advantage is that the Lagrange multiplier can provide an accurate representation of the reaction flux at the wall. Their main disadvantage is that they introduce extra unknowns, and are usually difficult to combine with other constraint methods on adjacent boundaries. Moreover, they may require extra constraints for the Lagrange multipliers. For more information, see [Weak Constraints](#) in the *COMSOL Multiphysics Reference Manual*.
- Discontinuous Galerkin (DG) constraints use a numerical flux to prescribe the velocity at the wall. They impose the constraint in a integral sense rather than pointwise, and do not suffer from the locking effects introduced by pointwise constraints when trying to prescribe a no penetration condition for the velocity. They are also better behaved when prescribing nonlinear constraints. Their main disadvantage is that the constraint is only imposed approximately, and may produce small leaks. For more information, see [Discontinuous Galerkin Formulation](#).

The following combination of Constraint techniques can be selected in the Constraint Setting sections of Wall boundary conditions:

- Use default settings. The default settings use different constraint methods depending on whether only the normal component of the velocity is prescribed, such as in the no penetration condition, $\mathbf{u} \cdot \mathbf{n} = 0$, imposed for example in Slip walls or No Slip walls using Wall Functions or Automatic Wall Treatment, or both

tangential and normal components are prescribed, as is the case of No Slip walls in laminar flow.

DG constraints are used to impose the no penetration condition for Slip walls. When a No Slip condition is prescribed, pointwise constraints are used except for moving walls where DG constraints are used.

- Use Pointwise constraints.
- Use DG constraints.
- Use Weak constraints. Weak constraints are not available on Interior Walls.
- Use Mixed constraints. This option is only available when both the tangential and normal components of the velocity need to be prescribed. The velocity on the wall normal direction is imposed via pointwise constraints. The constraint for the tangential directions is relaxed, and DG constraints are used instead. This provides improved accuracy and performance when working with coarse boundary layer meshes. For more information, see [Ref. 19](#).

Prescribing Inlet and Outlet Conditions

The Navier-Stokes equations can show large variations in mathematical behavior, ranging from almost completely elliptic to almost completely hyperbolic. This has implications when it comes to prescribing admissible boundary conditions. There is also a discrepancy between mathematically valid boundary conditions and practically useful boundary conditions. See [Inlet](#) and [Outlet](#) for the node settings.

INLET CONDITIONS

An inlet requires specification of the velocity components. The most robust way to do this is to prescribe a velocity field using a Velocity condition.

A common alternative to prescribing the complete velocity field is to prescribe a pressure and all but one velocity component. The pressure cannot be specified pointwise because this is mathematically over-constraining. Instead the pressure can be specified via a stress condition:

$$-p + 2\mu \frac{\partial u_n}{\partial n} = F_n \quad (4-20)$$

where $\partial u_n / \partial n$ is the normal derivative of the normal velocity component.

[Equation 4-20](#) is prescribed by the Pressure condition in the Inlet and Outlet features and the Normal stress condition in the Open Boundary and Boundary Stress features.

[Equation 4-20](#) is mathematically more stringent compared to specifying the pressure

pointwise and at the same time cannot guarantee that p obtains the desired value. In practice, p is close to F_n , except for low Reynolds number flows where viscous effects are the only effects that balance the pressure. In addition to Equation 4-20, all but one velocity component must be specified. For low Reynolds numbers, this can be specified by a vanishing tangential stress condition:

$$\mu \frac{\partial u_t}{\partial n} = 0$$

which is what the Normal stress condition does. Vanishing tangential stress becomes a less well-posed inlet condition as the Reynolds number increases. The Pressure condition in the Inlet feature therefore requires a flow direction to be prescribed, which provides a well-posed condition independent of Reynolds number.

OUTLET CONDITIONS

The most common approach is to prescribe a pressure via a normal stress condition on the outlet. This is often accompanied by a vanishing tangential stress condition:

$$\mu \frac{\partial u_t}{\partial n} = 0$$

where $\partial u_t / \partial n$ is the normal derivative of the tangential velocity field. It is also possible to prescribe u_t to be zero. The latter option should be used with care since it can have a significant effect on the upstream solution.

The elliptic character of the Navier-Stokes equations mathematically permit specifying a complete velocity field at an outlet. This can, however, be difficult to apply in practice. The reason being that it is hard to prescribe the outlet velocity so that it is consistent with the interior solution at each point. The adjustment to the specified velocity then occurs across an outlet boundary layer. The thickness of this boundary layer depends on the Reynolds number; the higher the Reynolds number, the thinner the boundary layer.

ALTERNATIVE FORMULATIONS

COMSOL provides several specialized boundary conditions that either provide detailed control over the flow at the boundary or that simulate specific devices. In

practice they often prescribe a velocity or a pressure, but calculate the prescribed values using for example ODEs.



Normal Stress Boundary Condition

Mass Flow

The **Mass flow** boundary condition constrains the mass flowing into the domain across an inlet boundary. The mass flow can be specified in a number of ways.

POINTWISE MASS FLUX

The pointwise mass flux sets the velocity at the boundary to:

$$\mathbf{u} = -\frac{m_f}{\rho}\mathbf{n}$$

where m_f is the normal mass flux and ρ is the density.

MASS FLOW RATE

The mass flow rate boundary condition sets the total mass flow through the boundary according to:

$$-\int_{\partial\Omega} d_{bc}\rho(\mathbf{u}\cdot\mathbf{n})dS = m$$

where d_{bc} (only present in the 2D Cartesian axis system) is the boundary thickness normal to the fluid-flow domain and m is the total mass flow rate.

In addition to the constraint on the total flow across the boundary, the tangential velocity components are set to zero on the boundary

$$\mathbf{u}\times\mathbf{n} = \mathbf{0} \tag{4-21}$$

STANDARD FLOW RATE

The standard flow rate boundary condition specifies the mass flow as a standard volumetric flow rate. The mass flow through the boundary is set by the equation:

$$-\int_{\partial\Omega} d_{bc} \frac{\rho}{\rho_{st}} (\mathbf{u} \cdot \mathbf{n}) dS = Q_{sv}$$

where d_{bc} (only present in the 2D component Cartesian axis system) is the boundary thickness normal to the fluid-flow domain, ρ_{st} is the standard density, and Q_{sv} is the standard flow rate. The standard density is defined by one of the following equations:

$$\rho_{st} = \frac{M_n}{V_n}$$


$$\rho_{st} = \frac{p_{st} M_n}{RT_{st}}$$

where M_n is the mean molar mass of the fluid, V_n is the standard molar volume, p_{st} is the standard pressure, R is the universal molar gas constant, and T_{st} is the standard temperature.

Equation 4-21 or Equation 4-22 is also enforced for compressible and incompressible flow, respectively, ensuring that the normal component of the viscous stress and the tangential component of the velocity are zero at the boundary.

Fully Developed Flow (Inlet)

The **Fully developed flow** boundary condition can be understood from the following figure:

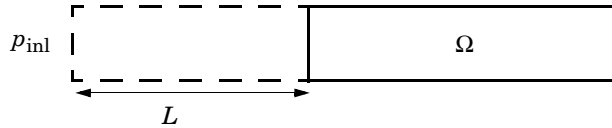

The flow to the domain Ω is assumed to enter through a straight channel of length L . The channel is a virtual extrusion of the inlet cross section and a pressure constant pressure P_{inl} is applied on the inlet of the virtual channel.

The Fully Developed Flow boundary condition prescribes that the tangential flow component on the boundary is zero:

$$\mathbf{u} - (\mathbf{u} \cdot \mathbf{n})\mathbf{n} = \mathbf{0}$$

The momentum equation for a fully developed flow in the virtual extrusion of the inlet cross section can then be projected onto the inlet boundary with the following weak equation as the result:

$$(-\mu(\nabla_{\mathbf{t}}\mathbf{u} + (\nabla_{\mathbf{t}}\mathbf{u})^T) + p)\nabla_{\mathbf{t}}\hat{\mathbf{u}}L - P_{\text{inl}}(\mathbf{n} \cdot \hat{\mathbf{u}})$$

The exact value of L is somewhat arbitrary as long as it is not too high or too low. L is therefore set to ten times the inlet edge length in 2D and to ten times the square root of the inlet area in 2D axisymmetry and in 3D.

The fact that the velocity profile is not prescribed, but rather the solution of a projected weak contribution, means that the actual velocity profile that is obtained on the inlet can deviate from the analytical fully developed flow profile (in cases such an analytical solution exists) if required by the solution inside the computational domain, Ω . This is most notably if the flow is strongly curved just downstream of the inlet. This can for example be the case if an object is positioned just downstream of the inlet or if the adjacent boundaries are not orthogonal to the inlet. The analytical solution can in these cases be recovered by including a little bit of the inlet channel in the computational domain.

The inlet pressure, P_{inl} , must be solved for and its equation is a discrete algebraic equation (DAE) for P_{inl} . When, for example, the average velocity is specified, the DAE reads

$$(\langle \mathbf{u} \cdot \mathbf{n} \rangle + U_{\text{av}})\hat{P}_{\text{inl}}$$

where $\langle \cdot \rangle$ denotes the average over the inlet. Since the equation for P_{inl} is a DAE (the equation for P_{inl} does not contain P_{inl}), it must be solved coupled to Navier-Stokes and it must be treated by a Vanka pre- and post-smoother if iterative solvers are employed.


The boundary conditions for the virtual inlet channel are inherited from the boundaries adjacent to the inlet channel. Virtual boundaries adjacent to walls (except slip walls) are treated as no-slip walls. Virtual boundaries adjacent to any other type of boundary are treated as slip-walls (or equivalently as symmetry boundaries). So in the figure above, if the lower boundary of Ω is a no-slip wall and the top boundary is a symmetry boundary, the lower boundary of the virtually extruded channel becomes a no-slip wall and the upper boundary a symmetry boundary.

Algebraic turbulence models need to additional equations or constraints. For all other turbulence models, their weak equations in the virtual inlet channel are projected onto

the inlet of the computational domain. The projections are regularized to prevent the production to fall to zero, so the solutions of the projects can show slight deviation from the correct solutions close to no-slip walls.

Fully Developed Flow (Outlet)

The **Fully developed flow** boundary condition can be understood from the following figure:

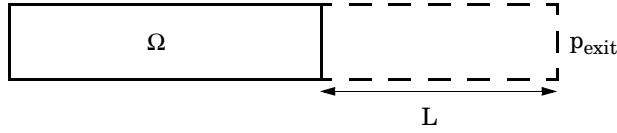

The flow to the domain Ω is assumed to enter through a straight channel of length L . The channel is a virtual extrusion of the inlet cross section and a pressure constant pressure P_{exit} is applied on the inlet of the virtual channel.

The Fully Developed Flow boundary condition prescribes that the tangential flow component on the boundary is zero:

$$\mathbf{u} - (\mathbf{u} \cdot \mathbf{n})\mathbf{n} = \mathbf{0}$$

The momentum equation for a fully developed flow in the virtual extrusion of the inlet cross section can then be projected onto the inlet boundary with the following weak equation as the result:

$$(-\mu(\nabla_{\mathbf{t}}\mathbf{u} + (\nabla_{\mathbf{t}}\mathbf{u})^T) + p)\nabla_{\mathbf{t}}\hat{\mathbf{u}}L - P_{\text{exit}}(\mathbf{n} \cdot \hat{\mathbf{u}})$$

The exact value of L is somewhat arbitrary as long as it is not too high or too low. L is therefore set to ten times the inlet edge length in 2D and to ten times the square root of the inlet area in 2D axisymmetry and in 3D.

The fact that the velocity profile is not prescribed, but rather the solution of a projected weak contribution, means that the actual velocity profile that is obtained on the outlet can deviate from the analytical fully developed flow profile (in cases such an analytical solution exists) if required by the solution inside the computational domain, Ω . The inlet pressure, P_{exit} , must be solved for and its equation is a discrete algebraic equation (DAE) for P_{exit} . When, for example, the average velocity is specified, the DAE reads

$$(\langle \mathbf{u} \cdot \mathbf{n} \rangle + U_{av}) \hat{P}_{\text{exit}}$$

where $\langle \cdot \rangle$ denotes the average over the inlet. Since the equation for P_{ext} is a DAE, it must be solved coupled to Navier-Stokes and it must be treated by a Vanka pre- and post-smoother if iterative solvers are employed.

The boundary conditions for the virtual outlet channel are inherited from the boundaries adjacent to the outlet channel. Virtual boundaries adjacent to walls (except slip walls) are treated as no-slip walls. Virtual boundaries adjacent to any other type of boundary are treated as slip-walls (or equivalently as symmetry boundaries).

No Viscous Stress

For this module, and in addition to the Pressure, No Viscous Stress boundary condition, the viscous stress condition sets the viscous stress to zero:

$$\left(\mu(\nabla \mathbf{u} + (\nabla \mathbf{u})^T) - \frac{2}{3} \mu(\nabla \cdot \mathbf{u}) \mathbf{I} \right) \mathbf{n} = \mathbf{0}$$

$$(\mu(\nabla \mathbf{u} + (\nabla \mathbf{u})^T)) \mathbf{n} = \mathbf{0}$$

using the compressible/weakly compressible and the incompressible formulation, respectively.

The condition is not a sufficient outlet condition since it lacks information about the outlet pressure. It must hence be combined with pressure point constraints on one or several points or lines surrounding the outlet.

This boundary condition is numerically the least stable outlet condition, but can still be beneficial if the outlet pressure is nonconstant due to, for example, a nonlinear volume force.

Normal Stress Boundary Condition

The total stress on the boundary is set equal to a stress vector of magnitude f_0 , oriented in the negative normal direction:

$$\left(-p \mathbf{I} + \left(\mu(\nabla \mathbf{u} + (\nabla \mathbf{u})^T) - \frac{2}{3} \mu(\nabla \cdot \mathbf{u}) \mathbf{I} \right) \right) \mathbf{n} = -f_0 \mathbf{n}$$

$$(-p \mathbf{I} + \mu(\nabla \mathbf{u} + (\nabla \mathbf{u})^T)) \mathbf{n} = -f_0 \mathbf{n}$$

using the compressible/weakly compressible and the incompressible formulation, respectively.

This implies that the total stress in the tangential direction is zero. This boundary condition implicitly sets a constraint on the pressure which for 2D flows is

$$p = 2\mu \frac{\partial u_n}{\partial n} + f_0 \quad (4-22)$$

If $\partial u_n / \partial n$ is small, Equation 4-22 states that $p \approx f_0$.

The Normal Stress condition is the mathematically correct version of the **Pressure Conditions** condition (Ref. 4), but it is numerically less stable.

Pressure Boundary Condition

For single-phase flow, a mathematically correct natural boundary condition for outlets is

$$\left(-p\mathbf{I} + \mu(\nabla\mathbf{u} + (\nabla\mathbf{u})^T) - \frac{2}{3}\mu(\nabla \cdot \mathbf{u})\mathbf{I} \right) \mathbf{n} = -p_0\mathbf{n} \quad (4-23)$$

$$(-p\mathbf{I} + \mu(\nabla\mathbf{u} + (\nabla\mathbf{u})^T)) \mathbf{n} = -p_0\mathbf{n} \quad (4-24)$$

using the compressible/weakly compressible and the incompressible formulation, respectively.

This is a normal stress condition together with a no-tangential-stress condition. When $\mu > 0$, Equation 4-23 or Equation 4-24 can be supplemented with a tangential velocity condition

$$\mathbf{u} \cdot \mathbf{t} = 0 \quad (4-25)$$

If so, the no-tangential-stress condition is overridden. An issue with Equation 4-23 or Equation 4-24 is that it does not strongly enforce unidirectional flow on the boundary. If the prescribed pressure on an outlet is too high, parts of the outlet can actually have inflow. This is not as much of an issue for the Navier-Stokes equations as it is an issue for scalar transport equations solved along with the Navier-Stokes equations. Hence, when applying the **Pressure** boundary condition at an outlet or inlet you can further constrain the flow. With the Suppress backflow option

$$\begin{aligned}
(-p\mathbf{I} + \mu(\nabla\mathbf{u} + (\nabla\mathbf{u})^T) - \frac{2}{3}\mu(\nabla \cdot \mathbf{u})\mathbf{I})\mathbf{n} &= -\hat{p}_0\mathbf{n} \\
(-p\mathbf{I} + \mu(\nabla\mathbf{u} + (\nabla\mathbf{u})^T))\mathbf{n} &= -\hat{p}_0\mathbf{n} \\
\hat{p}_0 &\leq p_0
\end{aligned} \tag{4-26}$$

the normal stress is adjusted to keep

$$\mathbf{u} \cdot \mathbf{n} \geq 0 \tag{4-27}$$

Equation 4-26 effectively means that the prescribed pressure is p_0 if $\mathbf{u} \cdot \mathbf{n} \geq 0$, but smaller at locations where $\mathbf{u} \cdot \mathbf{n} < 0$. This means that Equation 4-26 does not completely prevent backflow, but the backflow is substantially reduced. Backflow is suppressed also when external forces are acting on the fluid, provided the magnitude of these forces are of the same order as the dynamic pressure at the outlet.

A pressure condition can also be applied at an inlet. In this case, either the normal stress is prescribed

$$\begin{aligned}
\mathbf{n}^T(-p\mathbf{I} + \mu(\nabla\mathbf{u} + (\nabla\mathbf{u})^T) - \frac{2}{3}\mu(\nabla \cdot \mathbf{u})\mathbf{I})\mathbf{n} &= -\hat{p}_0 \\
\mathbf{n}^T(-p\mathbf{I} + \mu(\nabla\mathbf{u} + (\nabla\mathbf{u})^T))\mathbf{n} &= -\hat{p}_0 \\
\hat{p}_0 &\geq p_0
\end{aligned} \tag{4-28}$$

together with the tangential condition in Equation 4-25, or, a general flow direction is prescribed.

$$\begin{aligned}
\mathbf{r}_{\mathbf{u}}^T(-p\mathbf{I} + \mu(\nabla\mathbf{u} + (\nabla\mathbf{u})^T) - \frac{2}{3}\mu(\nabla \cdot \mathbf{u})\mathbf{I})\mathbf{n} &= -\hat{p}_0(\mathbf{r}_{\mathbf{u}} \cdot \mathbf{n}) \\
\mathbf{r}_{\mathbf{u}}^T(-p\mathbf{I} + \mu(\nabla\mathbf{u} + (\nabla\mathbf{u})^T))\mathbf{n} &= -\hat{p}_0(\mathbf{r}_{\mathbf{u}} \cdot \mathbf{n}) \\
\hat{p}_0 &\geq p_0 \\
\mathbf{u} - (\mathbf{u} \cdot \mathbf{r}_{\mathbf{u}})\mathbf{r}_{\mathbf{u}} &= \mathbf{0}, \quad \mathbf{r}_{\mathbf{u}} = \frac{\mathbf{d}_{\mathbf{u}}}{\|\mathbf{d}_{\mathbf{u}}\|}
\end{aligned} \tag{4-29}$$

The “>” option is used with suppress backflow to have $\mathbf{u} \cdot \mathbf{n} \leq 0$ or $\mathbf{u} \cdot \mathbf{r}_{\mathbf{u}} \geq 0$.

See [Inlet](#), [Outlet](#), [Open Boundary](#), and [No Viscous Stress](#) for the individual node settings. Note that some modules have additional theory sections describing options available with that module.

Mass Sources for Fluid Flow

There are two types of mass sources in a Single-Phase Flow interface: point sources and line sources.



These features require at least one of the following licenses: Batteries & Fuel Cells Module, CFD Module, Chemical Reaction Engineering Module, Corrosion Module, Electrochemistry Module, Electrodeposition Module, Microfluidics Module, Pipe Flow Module, or Subsurface Flow Module.

POINT SOURCE

A point source is theoretically formed by taking a mass injection/ejection, \dot{Q} (SI unit: $\text{kg}/(\text{m}^3 \cdot \text{s})$), in a small volume δV and then letting the size of the volume tend to zero while keeping the total mass flux constant. Given a point source strength, \dot{q}_p (SI unit: kg/s), this can be expressed as

$$\lim_{\delta V \rightarrow 0} \int_{\delta V} \dot{Q} = \dot{q}_p \quad (4-30)$$

An alternative way to form a point source/sink is to assume that mass is injected/extracted through the surface of a small object. Letting the object surface area tend to zero while keeping the mass flux constant, results in the same point source. For this alternative approach, effects resulting from the physical object volume, such as drag and fluid displacement, need to be neglected.

The weak contribution

$$\dot{q}_p \text{test}(p)$$

is added to a point in the geometry. As can be seen from [Equation 4-30](#), \dot{Q} must tend to plus or minus infinity as δV tends to zero. This means that in theory the pressure also tends to plus or minus infinity.

Observe that “point” refers to the physical representation of the source. A point source can therefore only be added to points in 3D components and to points on the

symmetry axis in 2D axisymmetry components. Other geometrical points in 2D components represent physical lines.

The finite element representation of Equation 4-30 corresponds to a finite pressure in a point with the effect of the point source spread out over a region around the point. The size of the region depends on the mesh and on the strength of the source. A finer mesh gives a smaller affected region, but also a more extreme pressure value. It is important not to mesh too finely around a point source since the resulting pressure can result in unphysical values for the density, for example. It can also have a negative effect on the condition number for the equation system.

LINE SOURCE

A line source can theoretically be formed by assuming a source of strength \dot{Q} (SI unit: $\text{kg}/(\text{m}^3 \cdot \text{s})$), located within a tube with cross-sectional area δS and then letting δS tend to zero, while keeping the total mass flux per unit length constant. Given a line source strength, \dot{q}_l (SI unit: $\text{kg}/(\text{m} \cdot \text{s})$), this can be expressed as

$$\lim_{\delta S \rightarrow 0} \int_{\delta S} \dot{Q} = \dot{q}_l \quad (4-31)$$

As in the point source case, an alternative approach is to assume that mass is injected/extracted through the surface of a small object. This results in the same mass source, but requires that effects on the fluid resulting from the physical object volume are neglected.

The weak contribution

$$\dot{q}_l \text{test}(p)$$

is added to lines in 3D or to points in 2D (which represent cut-through views of lines). Line sources can also be added to the axisymmetry line in 2D axisymmetry components. It cannot, however, be added to geometrical lines in 2D because they represent physical planes.

As with a point source, it is important not to mesh too finely around the line source.




For feature node information, see [Line Mass Source](#) and [Point Mass Source](#) in the *COMSOL Multiphysics Reference Manual*.



For the Reacting Flow in Porous Media, Diluted Species interface, which is available with the CFD Module, Chemical Reaction Engineering Module, or Batteries & Fuel Cells Module, these shared physics nodes are renamed as follows:

- The **Line Mass Source** node is available as two nodes, one for the fluid flow (**Fluid Line Source**) and one for the species (**Species Line Source**).
- The **Point Mass Source** node is available as two nodes, one for the fluid flow (**Fluid Point Source**) and one for the species (**Species Point Source**).

Numerical Stability — Stabilization Techniques for Fluid Flow

The momentum equation (Equation 4-10 or Equation 4-12) is a (nonlinear) convection-diffusion equation. Such equations can easily become unstable if discretized using the Galerkin finite element method. Stabilized finite element methods are usually necessary in order to obtain physical solutions. The stabilization settings are found in the main Fluid Flow interface features. To display this section, click the **Show More Options** button () and select **Stabilization** in the **Show More Options** dialog box.

There are three types of stabilization methods available for Navier-Stokes — *streamline diffusion*, *crosswind diffusion*, and *isotropic diffusion*. Streamline diffusion and crosswind diffusion are consistent stabilization methods, whereas isotropic diffusion is an inconsistent stabilization method.

For optimal functionality, the exact weak formulations of and constants in the streamline diffusion and crosswind diffusion methods depend on the order of the shape functions (basis functions) for the elements. The values of constants in the streamline diffusion and crosswind diffusion methods follow Ref. 5 and Ref. 6.

STREAMLINE DIFFUSION

For strongly coupled systems of equations, the streamline diffusion method must be applied to the system as a whole rather than to each equation separately. These ideas were first explored by Hughes and Mallet (Ref. 8) and were later extended to Galerkin least-squares (GLS) applied to the Navier-Stokes equations (Ref. 9). This is the streamline diffusion formulation that COMSOL Multiphysics supports. The time-scale tensor is the diagonal tensor presented in Ref. 10.

The time-scale tensors for time-dependent problems should in theory depend on a time-scale that many references just set to the time-step taken by the time-solver, Δt

(see for example [Ref. 9](#) and [Ref. 10](#)). This simple approach doesn't however necessarily reflect on the actual time-scales in the physics. A typical example is reacting flows where the time-step is often guided by fast reactions, while the flow develops relatively slowly. COMSOL Multiphysics can therefore replace Δt^2 in the time scale tensor with measures of type $(1/(\tilde{\Delta t})^2)^{-1}$ which are calculated from projections of weak expressions in a fashion similar to those in [Ref. 11](#). These measures of the time scale are used when **Use dynamic subgrid timescale** check box is selected. Streamline diffusion is active by default because it is necessary when convection is dominating the flow.

The governing equations for incompressible flow are subject to the Babuška-Brezzi condition, which states that the shape functions (basis functions) for pressure must be of lower order than the shape functions for velocity. If the incompressible Navier-Stokes equations are stabilized by streamline diffusion, it is possible to use equal-order interpolation. Hence, streamline diffusion is necessary when using first-order elements for both velocity and pressure. This applies also if the model is solved using geometric multigrid (either as a solver or as a preconditioner) and at least one multigrid hierarchy level uses linear Lagrange elements.

CROSSWIND DIFFUSION

Crosswind diffusion can also be formulated for systems of equations, and when applied to the Navier-Stokes equations it becomes a shock-capturing operator. COMSOL Multiphysics supports the formulation in [Ref. 9](#) with a shock-capturing viscosity of the Hughes-Mallet type [Ref. 8](#).

Incompressible flows do not contain shock waves, but crosswind diffusion is still useful for introducing extra diffusion in sharp boundary layers and shear layers that otherwise would require a very fine mesh to resolve.

Crosswind diffusion is active by default as it makes it easier to obtain a solution even if the problem is fully resolved by the mesh. Crosswind diffusion also enables the iterative solvers to use inexpensive presmoothers. If crosswind diffusion is deactivated, more expensive preconditioners must be used instead.

ISOTROPIC DIFFUSION

Isotropic diffusion adds diffusion to the Navier-Stokes equations. Isotropic diffusion significantly reduces the accuracy of the solution but does a very good job at reducing oscillations. The stability of the continuity equation is not improved.



[Numerical Stabilization](#) and [Iterative](#) in the *COMSOL Multiphysics Reference Manual*

Solvers for Laminar Flow

The Navier-Stokes equations constitute a nonlinear equation system. A nonlinear solver must hence be applied to solve the problem. The nonlinear solver iterates to reach the final solution. In each iteration, a linearized version of the nonlinear system is solved using a linear solver. In the time-dependent case, a time marching method must also be applied. The default suggestions for each of these solver elements are discussed below.

NONLINEAR SOLVER

The nonlinear solver method depends on if the model solves a stationary or a time-dependent problem.

Stationary Solver

In the stationary case, a fully coupled, damped Newton method is applied. The initial damping factor is low since a full Newton step can be harmful unless the initial values are close to the final solution. The nonlinear solver algorithm automatically regulates the damping factor in order to reach a converged solution.

For advanced models, the automatically damped Newton method might not be robust enough. A pseudo time-stepping algorithm can then be invoked. See [Pseudo Time Stepping for Laminar Flow Models](#).

Time-Dependent Solver

In the time-dependent case, the initial guess for each time step is (loosely speaking) the previous time step, which is a very good initial value for the nonlinear solver. The automatic damping algorithm is then not necessary. The damping factor in the Newton method is instead set to a constant value slightly smaller than one. Also, for the same reason, it suffices to update the Jacobian once per time-step.

It is seldom worth the extra computational cost to update the Jacobian more than once per time step. For most models it is more efficient to restrict the maximum time step or possibly lower the damping factor in the Newton method.

LINEAR SOLVER

The linearized Navier-Stokes equation system has saddle point character, unless the density depends on the pressure. This means that the Jacobian matrix has zeros on the diagonal. Even when the density depends on the pressure, the equation system effectively shares many numerical properties with a saddle point system.

For small 2D and 3D models, the default solver suggestion is a direct solver. Direct solvers can handle most nonsingular systems and are very robust and also very fast for small models. Unfortunately, they become slow for large models and their memory requirement scales as somewhere between $N^{1.5}$ and N^2 , where N is the number of degrees of freedom in the model. The default suggestion for large 2D and 3D models is therefore the iterative GMRES solver. The memory requirement for an iterative solver optimally scales as N .

GMRES is accelerated by a multigrid method, per default the Smoothed Aggregation Algebraic Multigrid (SAAMG) method. The cost of SAAMG is typically very low compared to the number of GMRES iterations necessary if no multigrid method is used. As the name implies, SAAMG builds its coarser meshes algebraically, so the application requires no additional meshes in order to employ SAAMG. In contrast, Geometric Multigrid (GMG) requires actual meshes. If a sufficient number of multigrid levels can be constructed, GMG is often faster than SAAMG. GMG is also superior for cluster computations and for shared memory computations with many cores. When the default linear solver is GMRES, an optional, but deactivated, linear solver node is available where GMRES is accelerated by GMG.

Multigrid methods need smoothers, but the saddle point character of the linear system restricts the number of applicable smoothers. The choices are further restricted by the anisotropic meshes frequently encountered in fluid-flow problems. The efficiency of the smoothers is highly dependent on the numerical stabilization. Iterative solvers perform at their best when both [Streamline Diffusion](#) and [Crosswind Diffusion](#) are active.

The default smoother for P1+P1 elements is SCGS. This is an efficient and robust smoother specially designed to solve saddle point systems on meshes that contain anisotropic elements. The SCGS smoother works well even without crosswind diffusion. SCGS can sometimes work for higher-order elements, especially if **Method** in the SCGS settings is set to **Mesh element lines**. But there is no guarantee for this, so the

default smoother for higher order elements is an SOR Line smoother. SOR Line handles mesh anisotropy but does not formally address the saddle point character. It does, however, function in practice provided that streamline diffusion and crosswind diffusion are both active.

A different kind of saddle point character can arise if the equation system contains ODE variables. Some advanced boundary conditions can add equations with such variables. These variables must be treated with the Vanka algorithm. SCGS includes an option to invoke Vanka. Models with higher-order elements must apply SCGS or use the Vanka smoother. The latter is the default suggestion for higher-order elements, but it does not work optimally for anisotropic meshes.

TIME-DEPENDENT SOLVERS

The default time-dependent solver for Navier-Stokes is the BDF method with maximum order set to two. Higher BDF orders are not stable for transport problems in general nor for Navier-Stokes in particular.

BDF methods have been used for a long time and are known for their stability. However, they can have severe damping effects, especially the lower-order methods. Hence, if robustness is not an issue, a model can benefit from using the generalized- α method instead. Generalized- α is a solver which has properties similar to those of the second-order BDF solver but it is much less diffusive.

Both BDF and generalized- α are per default set to automatically adjust the time step. While this works well for many models, extra efficiency and accuracy can often be gained by specifying a maximum time step. It is also often beneficial to specify an initial time step to make the solver progress smoothly in the beginning of the time series.



In the *COMSOL Multiphysics Reference Manual*:

- [Time-Dependent Solver](#)
- [Multigrid, Direct, Iterative, SCGS, SOR Line, and Vanka](#)
- [Stationary Solver](#)

Pseudo Time Stepping for Laminar Flow Models

A stationary formulation has per definition no time derivatives and [Equation 4-12](#) reduces to:

$$\rho(\mathbf{u} \cdot \nabla)\mathbf{u} = \nabla \cdot [-p\mathbf{I} + \mu(\nabla\mathbf{u} + (\nabla\mathbf{u})^T)] + \mathbf{F} \quad (4-32)$$

Solving Equation 4-32 requires a starting guess that is close enough to the final solution. If no such guess is at hand, the fully transient problem can be solved instead. This is, however, a rather costly approach in terms of computational time. An intermediate approach is to add a fictitious time derivative to Equation 4-32:

$$\rho \frac{\mathbf{u} - \text{nojac}(\mathbf{u})}{\Delta \tilde{t}} + \rho(\mathbf{u} \cdot \nabla)\mathbf{u} = \nabla \cdot [-p\mathbf{I} + \mu(\nabla\mathbf{u} + (\nabla\mathbf{u})^T)] + \mathbf{F}$$

where $\Delta \tilde{t}$ is a *pseudo time step*. Since $\mathbf{u} - \text{nojac}(\mathbf{u})$ is always zero, this term does not affect the final solution. It does, however, affect the discrete equation system and effectively transforms a nonlinear iteration into a step of size $\Delta \tilde{t}$ of a time-dependent solver.

Pseudo time stepping is not active per default. The pseudo time step $\Delta \tilde{t}$ can be chosen individually for each element based on the local CFL number:

$$\Delta \tilde{t} = \text{CFL}_{\text{loc}} \frac{h}{|\mathbf{u}|}$$

where h is the mesh cell size. A small CFL number means a small time step. It is practical to start with a small CFL number and gradually increase it as the solution approaches steady state.

If the automatic expression for CFL_{loc} is set to the built-in variable `CFLCMP`, then the automatic setting suggests a PID regulator for the pseudo time step in the default solver. The PID regulator starts with a small CFL number and increases CFL_{loc} as the solution comes closer to convergence.

The default manual expression is

$$\begin{aligned} & 1.3^{\min(\text{niterCMP}, 9)} + \\ & \text{if}(\text{niterCMP} > 20, 9 \cdot 1.3^{\min(\text{niterCMP} - 20, 9)}, 0) + \\ & \text{if}(\text{niterCMP} > 40, 90 \cdot 1.3^{\min(\text{niterCMP} - 40, 9)}, 0) \end{aligned} \quad (4-33)$$

The variable `niterCMP` is the nonlinear iteration number. It is equal to one for the first nonlinear iteration. CFL_{loc} starts at 1.3 and increases by 30% each iteration until it reaches $1.3^9 \approx 10.6$. It remains there until iteration number 20 at which it starts to increase until it reaches approximately 106. A final increase after iteration number 40

then takes it to 1060. Equation 4-33 can, for some advanced flows, increase CFL_{loc} too slowly or too quickly. CFL_{loc} can then be tuned for the specific application.



For details about the CFL regulator, see [Pseudo Time Stepping](#) in the *COMSOL Multiphysics Reference Manual*.

Discontinuous Galerkin Formulation

Some boundary conditions are implemented using a discontinuous Galerkin formulation. These boundary conditions include

- [Wall](#) — Slip, sliding walls, and moving walls (that is, walls with nonzero translational velocity).
- [Periodic Flow Condition](#)
- [Flow Continuity](#)

The formulation used in the Fluid Flow interfaces in COMSOL Multiphysics is the Symmetric Interior Penalty Galerkin method (SIPG). The SIPG method can be regarded to satisfy the boundary conditions in an integral sense rather than pointwise. More information on SIPG can be found in [Ref. 15](#).

In particular, the SIPG formulation includes a penalty parameter that must be large enough for the formulation to be coercive. The higher the value, the better the boundary condition is fulfilled, but a too high value results in an ill-conditioned equation system. The penalty parameter in COMSOL Multiphysics is implemented according to [Ref. 16](#).

Particle Tracing in Fluid Flow

The Particle Tracing Module is available to assist with these types of modeling problems.

It is possible to model particle tracing with COMSOL Multiphysics provided that the impact of the particles on the flow field is negligible. First compute the flow field, and then, as an analysis step, calculate the motion of the particles. The motion of a particle is defined by Newton's second law

$$m \frac{d^2 \mathbf{x}}{dt^2} = \mathbf{F}\left(t, \mathbf{x}, \frac{d\mathbf{x}}{dt}\right)$$

where \mathbf{x} is the position of the particle, m the particle mass, and \mathbf{F} is the sum of all forces acting on the particle. Examples of forces acting on a particle in a fluid are the drag force, the buoyancy force, and the gravity force. The drag force represents the force that a fluid exerts on a particle due to a difference in velocity between the fluid and the particle. It includes the viscous drag, the added mass, and the Basset history term. Several empirical expressions have been suggested for the drag force. One of those is the one proposed by Khan and Richardson (Ref. 13). That expression is valid for spherical particles for a wide range of particle Reynolds numbers. The particle Reynolds number is defined as

$$\text{Re}_p = \frac{|\mathbf{u} - \mathbf{u}_p| 2r \rho}{\mu}$$

where \mathbf{u} is the velocity of the fluid, \mathbf{u}_p the particle velocity, r the particle radius, ρ the fluid density, and μ the dynamic viscosity of the fluid. The empirical expression for the drag force according to Khan and Richardson is

$$\mathbf{F} = \pi r^2 \rho |\mathbf{u} - \mathbf{u}_p| (\mathbf{u} - \mathbf{u}_p) [1.84 \text{Re}_p^{-0.31} + 0.293 \text{Re}_p^{0.06}]^{3.45}$$



The model *Flow Past a Cylinder* (Application Library path **COMSOL_Multiphysics/Fluid_Dynamics/cylinder_flow**) demonstrates how to add and set up particle tracing in a plot group using the **Particle Tracing with Mass** node. It uses the predefined Khan-Richardson model for the drag force and neglects gravity and buoyancy forces.


References for the Single-Phase Flow, Laminar Flow Interfaces

1. G.G. Stokes, Trans. Camb. Phil. Soc., 8, pp. 287–305, 1845
2. P.M. Gresho and R.L. Sani, *Incompressible Flow and the Finite Element Method, Volume 2: Isothermal Laminar Flow*, John Wiley & Sons, 2000.
3. G.K. Batchelor, *An Introduction To Fluid Dynamics*, Cambridge University Press, 1967.
4. R.L. Panton, *Incompressible Flow*, 2nd ed., John Wiley & Sons, 1996.
5. I. Harari and T.J.R. Hughes, “What are C and h ? Inequalities for the Analysis and Design of Finite Element Methods”, *Comp. Meth. Appl. Mech. Engrg*, vol. 97, pp. 157–192, 1992.

6. Y. Bazilevs, V.M. Calo, T.E. Tezduyar, and T.J.R. Hughes, “YZ β Discontinuity Capturing for Advection-dominated Processes with Application to Arterial Drug Delivery”, *Int.J.Num. Meth. Fluids*, vol. 54, pp. 593–608, 2007.
7. R.B. Bird, W.E. Stewart, and E.N. Lightfoot, *Transport Phenomena*, 2nd ed., John Wiley & Sons, 2007.
8. T.J.R. Hughes and M. Mallet, “A New Finite Element Formulation for Computational Fluid Dynamics: III. The Generalized Streamline Operator for Multidimensional Advective-Diffusive System”, *Comp. Meth. Appl. Mech. Engrg*, vol. 58, pp. 305–328, 1986.
9. G. Hauke and T.J.R. Hughes, “A Unified Approach to Compressible and Incompressible Flows”, *Comp. Meth. Appl. Mech. Engrg*, vol. 113, pp. 389–395, 1994.
10. G. Hauke, “Simple Stabilizing Matrices for the Computation of Compressible Flows in Primitive Variables”, *Comp. Meth. Appl. Mech. Engrg*, vol. 190, pp. 6881–6893, 2001.
11. M.-C. Hsu, Y. Bazilevs, V.M. Cali, T.E. Tezduyar, and T.J.R. Hughes, “Improving stability of stabilized and multiscale formulations in flow simulations at small time steps”, *Comp. Meth. Appl. Mech. Engrg*, vol. 199, pp. 828–840, 2010.
12. D.J. Tritton, *Physical Fluid Dynamics*, 2nd ed., Oxford University Press, 1988.
13. J.M. Coulson and J.F. Richardson, “Particle Technology and Separation Processes”, *Chemical Engineering, Volume 2*, Butterworth-Heinemann, 2002.
14. J.L. Guermond, P. Mineev, and J. Shen, “An overview of projection methods for incompressible flows”, *Comp. Meth. Appl. Mech. Engrg*, vol. 195, pp. 6011–6045, 2006.
15. B. Rivière, *Discontinuous Galerkin Methods for Solving Elliptic and Parabolic Equations*, SIAM, 2008.
16. Y. Epshteyn and B. Rivière, “Estimation of penalty parameters for symmetric interior penalty Galerkin methods”, *J. Computational and Applied Mathematics*, vol. 206, pp. 843–872, 2007.
17. G. Kariadakis, A. Beskok, and N. Aluru, *Microflows and Nanoflows*, Springer Science and Business Media, 2005.
18. R.P. Chhabra and J.F. Richardson, *Non-Newtonian Flow and Applied Rheology*, 2nd ed., Elsevier, 2008.

19. Y. Bazilevs and T.J.R. Hughes, “Weak imposition of Dirichlet boundary conditions in fluid mechanics”, *Computers and Fluids*, vol. 36, pp. 12–26, 2007.
20. G. Kariadakis, A. Beskok, and N. Aluru, *Microflows and Nanoflows*, Springer Science and Business Media, 2005.

Multiphase Flow, Two-Phase Flow Interfaces

There are several Fluid Flow interfaces available with the Microfluidics Module. These are found under the **Fluid Flow>Multiphase Flow** branch () when adding a physics interface. See [Modeling Microfluidic Fluid Flows](#) to help select the physics interface to use.

In this chapter:

- [The Laminar Two-Phase Flow, Level Set and Laminar Two-Phase Flow, Phase Field Interfaces](#)
- [The Laminar Three-Phase Flow, Phase Field Interface](#)
- [The Laminar Two-Phase Flow, Moving Mesh Interface](#)
- [Theory for the Level Set and Phase Field Interfaces](#)
- [Theory for the Three-Phase Flow, Phase Field Interface](#)
- [Theory for the Two-Phase Flow, Moving Mesh Interface](#)

The Laminar Two-Phase Flow, Level Set and Laminar Two-Phase Flow, Phase Field Interfaces



This section includes the following topics:

- [The Laminar Two-Phase Flow, Level Set Interface](#)
- [The Two-Phase Flow, Level Set Coupling Feature](#)
- [The Wetted Wall Coupling Feature](#)
- [The Interior Wetted Wall Coupling Feature](#)
- [The Laminar Two-Phase Flow, Phase Field Interface](#)
- [The Two-Phase Flow, Phase Field Coupling Feature](#)
- [Domain, Boundary, Point, and Pair Nodes for the Laminar Flow, Two-Phase, Level Set and Phase Field Interfaces](#)



Mathematics, Moving Interfaces

The Laminar Two-Phase Flow, Level Set Interface

The **Laminar Two-Phase Flow, Level Set** interface () found under the **Multiphase Flow>Two-Phase Flow, Level Set** branch () is a multiphysics interface designed to track the interface between two immiscible fluids. The flow is assumed to be laminar, that is, to be of low to moderate Reynolds number. The fluids can be incompressible or compressible.

When adding the **Laminar Two-Phase Flow, Level Set** multiphysics interface, a **Laminar Flow** and a **Level Set** interface are added to the Model Builder. In addition, a multiphysics coupling feature, [The Two-Phase Flow, Level Set Coupling Feature](#), is added automatically under the **Multiphysics** node. Other multiphysics coupling features, [The Wetted Wall Coupling Feature](#) and [The Interior Wetted Wall Coupling Feature](#), can be added when needed to model walls.

Simulations using the Laminar Two-Phase Flow, Level Set interface are always time-dependent since the position of an interface is almost always dependent of its history.

INTERFACE PROPERTIES



Discretization

By default the fluid flow discretization is set to **PI+PI**, and the level set discretization is set to **Linear**. This combination provides exact conservation of the integral of the level set variable when using the nonconservative form of the level set equation.



- [Theory for the Level Set and Phase Field Interfaces](#)
 - [Theory for the Single-Phase Flow Interfaces](#)
-

The Two-Phase Flow, Level Set Coupling Feature

The **Laminar Two-Phase Flow, Level Set**,  and **Turbulent Two-Phase Flow, Level Set**,  interfaces contain a multiphysics coupling feature, **Two-Phase Flow, Level Set**, which is added automatically.

The **Two-Phase Flow, Level Set** multiphysics coupling feature defines the density and dynamic viscosity of the fluid used in the **Laminar Flow** interface, and it defines the surface tension on the interface in form of a volume force used in the momentum equation. It also enables the **Level Set** interface to use the velocity field calculated from the **Laminar Flow** interface to transport the interface.

SETTINGS

The **Label** is the default multiphysics coupling feature name.

The **Name** is used primarily as a scope prefix for variables defined by the coupling node. Refer to such variables in expressions using the pattern `<name>.<variable_name>`. In order to distinguish between variables belonging to different coupling nodes or physics interfaces, the name string must be unique. Only letters, numbers, and underscores (`_`) are permitted in the **Name** field. The first character must be a letter.

The default **Name** (for the first multiphysics coupling feature **Two-Phase Flow, Level Set** in the model) is `tpf1`.

DOMAIN SELECTION

When nodes are added from the context menu, you can select **All domains** (the default) or select **Manual** from the **Selection** list to choose specific domains.

COUPLED INTERFACES

This section controls which individual interfaces are coupled by the current coupling feature. If a physics interface is deleted and then added to the model again, then in order to reestablish the coupling, you need to choose the correct physics interface again from the **Fluid flow** or **Moving interfaces** lists.

MODEL INPUTS

Fluid properties of each phase, such as density, viscosity, or the surface tension coefficient, can be defined through user inputs, variables, or by selecting a material. For the latter option, additional inputs, for example temperature or pressure, may be required to define these properties.


Temperature

By default, the **Temperature** model input is set to **Common model input**, and the temperature is controlled from **Default Model Inputs** under **Global Definitions** or by a locally defined **Model Input**. If a Heat Transfer interface is included in the component, it controls the temperature **Common model input**. Alternatively, the temperature field can be selected from another physics interface. All physics interfaces have their own tags (**Name**). For example, if a Heat Transfer in Fluids interface is included in the component, the **Temperature (ht)** option is available for T .

You can also select **User defined** from the **Temperature** model input in order to manually prescribe T .

Absolute Pressure

This input appears when a material requires the absolute pressure as a model input. The default **Absolute pressure** p_A is $p + p_{\text{ref}}$, where p is the dependent pressure variable from the Navier-Stokes or RANS equations, and p_{ref} is from the user input defined at the fluid flow physics interface level.

The **Absolute pressure** field can be edited by clicking **Make All Model Inputs Editable** () and entering the desired value in the input field.



[Model Inputs and Multiphysics Couplings](#) in the *COMSOL Multiphysics Reference Manual*

FLUID PROPERTIES

Use the corresponding section to specify the properties of the two fluids. The fluids are denoted **Fluid 1** and **Fluid 2** respectively.

To specify the properties of **Fluid 1** from a material, select the appropriate material in the **Fluid 1** list. Also make sure that the **Density of fluid 1** ρ_1 and **Dynamic viscosity of fluid 1** μ_1 are both set to **From Material**.

The density in a material can depend on temperature and/or pressure and these dependencies are automatically replaced by p_{ref} and T_{ref} for incompressible flows (as specified by the **Compressibility** setting of the fluid flow interface).

The non-Newtonian power-law and Carreau models can alternatively be used to specify the dynamic viscosities of the two fluids.

To instead apply a variable or expression for the density or dynamic viscosity for Fluid A, select **User defined** in the **Density of fluid 1** ρ_1 or the **Dynamic viscosity of fluid 1** μ_1 drop down list and enter the expression in the corresponding edit field.

Similarly, the properties of **Fluid 2** can be specified.



Care should be taken when using the **Domain Material** setting for the material properties for Fluid 1 and Fluid 2.

The material properties are obtained from the domain irrespective of the location of the interface. If two different materials are selected in domains 1 and 2, with the phase boundary initially coincident with the domain boundary, the model has convergence issues once the phase boundary moves away from the domain boundary. This is because a density discontinuity and a viscosity discontinuity occurs at the boundary separating the two fluids. For this reason selecting the material directly is recommended when setting the material properties for Fluid 1 and Fluid 2.


SURFACE TENSION

Select the **Include surface tension force in momentum equation** check box to include the surface tension force in the momentum equation.

Select a **Surface tension coefficient** σ (SI unit: N/m):

- To use a predefined expression, select **Library coefficient, liquid/gas interface** or **Library coefficient, liquid/liquid interface**. Then select an option from the list that displays below (for example, **Water/Air**, **Glycerol/Air** and so forth).
- For **User defined** enter a value or expression for the surface tension coefficient σ (SI unit: N/m).

The Wetted Wall Coupling Feature

The **Laminar Two-Phase Flow, Level Set**  interface contain an optional multiphysics coupling boundary feature, **Wetted Wall**. It is an exclusive feature which overrides the **Wall** feature in the Laminar interface as well as the **No Flow** feature in the Level Set interface. The **Wetted Wall** boundary condition is suitable for walls in contact with the fluid-fluid interface. When this boundary condition is used, the fluid-fluid interface can move along the wall.

For laminar flow, this boundary condition enforces the no-penetration condition $\mathbf{u} \cdot \mathbf{n}_{\text{wall}} = 0$ and adds a frictional force on the form

$$\mathbf{F}_{\text{fr}} = -\frac{\mu}{\beta} \mathbf{u}$$

where β is the slip length. For numerical calculations, a suitable choice is $\beta = h$, where h is the mesh element size. The boundary condition does not set the tangential velocity component to zero. However, the extrapolated tangential velocity component is 0 at a distance β outside the wall (see [Figure 5-1](#)).

If the surface tension force is included in the momentum equation in [The Two-Phase Flow, Level Set Coupling Feature](#), the **Wetted Wall** boundary condition also adds the following boundary force to enforce the contact angle:

$$\mathbf{F}_{\theta} = \sigma \delta(\mathbf{n}_{\text{wall}} \cdot \mathbf{n} - \cos \theta_w) \mathbf{n}$$

The contact angle θ_w is defined as the angle between the fluid interface and the wall (see [Figure 5-1](#)). For more information, see [Ref. 4](#) and [Ref. 5](#).

The contact angle θ_w can be defined directly or from Young's equation, which considers the components of the forces in the plane of the surface:

$$\sigma \cos(\theta_w) + \gamma_{s2} = \gamma_{s1} \quad (5-1)$$

where γ_{s1} is the surface energy density on the fluid 1 — solid (wall) interface and γ_{s2} is the surface energy density on the fluid 2 — solid (wall) interface.

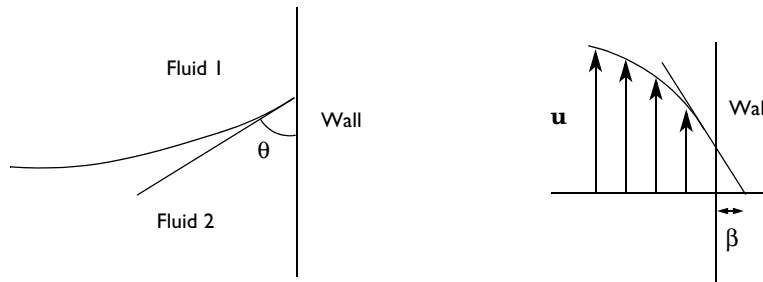


Figure 5-1: Definition of the contact angle θ at interface/wall contact points (left) and an illustration of the slip length β (right).

SETTINGS

The **Label** is the default multiphysics coupling feature name.

The default **Name** (for the first **Wetted Wall** multiphysics coupling feature in the model) is `ww1`.

BOUNDARY SELECTION

When nodes are added from the context menu, select **All boundaries** (the default) or select **Manual** from the **Selection** list to choose specific boundaries.

COUPLED INTERFACES

This section controls which individual interfaces are coupled by the current coupling feature. If a physics interface is deleted and then added to the model again, then in order to reestablish the coupling, you need to choose the correct physics interface again from the **Fluid flow** or **Moving interfaces** lists.

WALL MOVEMENT

This section contains controls to describe the wall movement relative to the lab (or spatial) frame.

The **Translational velocity** setting controls the translational wall velocity, \mathbf{u}_{tr} . The list is per default set to **Automatic from frame**. The physics automatically detects if the spatial frame moves. This can for example happen if an ALE interface is present in the model component. If there is no movement $\mathbf{u}_{tr} = \mathbf{0}$. If the frame moves, \mathbf{u}_{tr} becomes equal to the frame movement.

Select **Manual** from **Translational velocity** selection list in order to manually prescribe **Velocity of moving wall**, \mathbf{u}_{tr} . This can for example be used to model an oscillating wall where the magnitude of the oscillations are very small compared to the rest of the model. Specifying translational velocity manually does not automatically cause the associated wall to move. An additional Moving Mesh interface needs to be added to physically track the wall movement in the spatial reference frame.

WETTED WALL

Specify the following two properties for the wetted wall:


- The **Slip Length** setting is per default set to **Factor of minimum element length**. The slip length β is then defined as $\beta = f_h h_{\min}$, where h_{\min} is the smallest element side (corresponds to the element size in the wall normal direction for boundary layer elements) and f_h is a user input. Select **User defined** from **Slip Length** selection list in order to manually prescribe β (SI unit: m).
- Select an option from the **Specify contact angle list** — **Directly** (the default) or **Through Young's equation**. For **Directly** enter a **Contact angle** θ_w (SI unit: rad). The default is $\pi/2$ radians. For **Through Young's equation** enter values or expressions for **Phase 1-Solid surface energy density** γ_{s1} (SI unit: J/m²) and **Phase 2-Solid surface energy density** γ_{s2} (SI unit: J/m²).



Theory for the Level Set and Phase Field Interfaces

The Interior Wetted Wall Coupling Feature

The **Interior Wetted Wall**, multiphysics coupling boundary feature can only be applied on interior boundaries.

It is similar to [The Wetted Wall Coupling Feature](#) available on exterior boundaries of the **Laminar Two-Phase Flow, Level Set** () multiphysics interface, except that it applies on both sides of an interior boundary. It is an exclusive feature which overrides the **Interior Wall** feature in the Laminar interface as well as the **Thin Barrier** feature in the Level Set interface. It is available for laminar flow and turbulent flow with wall functions or automatic wall treatment.

The **Interior Wetted Wall** coupling feature allows discontinuities (velocity, pressure, level set variable) across the boundary and can be used to avoid meshing thin structures

in contact with the fluid-fluid interface. When this boundary condition is used, the fluid-fluid interface can move along the wall.

For laminar flow, this boundary condition enforces the no-penetration condition $\mathbf{u} \cdot \mathbf{n}_{\text{wall}} = 0$ on both sides of the wall, and adds a frictional force on the form

$$\mathbf{F}_{\text{fr}} = -\frac{\mu}{\beta} \mathbf{u}$$

where β is the slip length. For numerical calculations, a suitable choice is $\beta = h$, where h is the mesh element size.

If the surface tension force is included in the momentum equation, the **Interior Wetted Wall** boundary condition also adds the following boundary force on both sides of the walls to enforce the contact angle:

$$\mathbf{F}_{\theta} = \sigma \delta(\mathbf{n}_{\text{wall}} \cdot \mathbf{n} - \cos \theta_w) \mathbf{n}$$

For more information, see [The Wetted Wall Coupling Feature](#).

SETTINGS

The **Label** is the default multiphysics coupling feature name.

The default **Name** (for the first **Interior Wetted Wall** multiphysics coupling feature in the model) is `iww1`.

COUPLED INTERFACES

This section controls which individual interfaces are coupled by the current coupling feature. If a physics interface is deleted and then added to the model again, then in order to reestablish the coupling, you need to choose the correct physics interface again from the **Fluid flow** or **Moving interfaces** lists.

WALL MOVEMENT

This section contains controls to describe the wall movement relative to the lab (or spatial) frame.

The **Translational velocity** setting controls the translational wall velocity, \mathbf{u}_{tr} . The list is per default set to **Automatic from frame**. The physics automatically detects if the spatial frame moves. This can for example happen if an ALE interface is present in the model component. If there is no movement $\mathbf{u}_{\text{tr}} = \mathbf{0}$. If the frame moves, \mathbf{u}_{tr} becomes equal to the frame movement.

Select **Manual** from **Translational velocity** selection list in order to manually prescribe **Velocity of moving wall**, \mathbf{u}_{tr} . This can for example be used to model an oscillating wall where the magnitude of the oscillations are very small compared to the rest of the model. Specifying translational velocity manually does not automatically cause the associated wall to move. An additional Moving Mesh interface needs to be added to physically track the wall movement in the spatial reference frame.

BOUNDARY SELECTION

When nodes are added from the context menu, select **All boundaries** (the default) or select **Manual** from the **Selection** list to choose specific boundaries.

WETTED WALL



Specify the following two properties for the interior wetted wall:

- The **Slip Length** setting is per default set to **Factor of minimum element length**. The slip length β is then defined as $\beta = f_h h_{\min}$, where h_{\min} is the smallest element side (corresponds to the element size in the wall normal direction for boundary layer elements) and f_h is a user input. Select **User defined** from **Slip Length** selection list in order to manually prescribe β (SI unit: m).
- Select an option from the **Specify contact angle list** — **Directly** (the default) or **Through Young's equation**. For **Directly** enter a **Contact angle** θ_w (SI unit: rad). The default is $\pi/2$ radians. For **Through Young's equation** enter values or expressions for **Phase 1-Solid surface energy density** γ_{s1} (SI unit: J/m²) and **Phase 2-Solid surface energy density** γ_{s2} (SI unit: J/m²).



The Wetted Wall Coupling Feature

The Laminar Two-Phase Flow, Phase Field Interface

The **Laminar Two-Phase Flow, Phase Field** interface () found under the **Multiphase Flow>Two-Phase Flow, Phase Field** branch () is a multiphysics interface designed to track the interface between two immiscible fluids. The flow is assumed to be laminar, that is, to be of low to moderate Reynolds number. The fluids can be incompressible or compressible.

When adding the **Laminar Two-Phase Flow, Phase Field** multiphysics interface, a **Laminar Flow** and a **Phase Field** interface are added to the Model Builder. In addition, a multiphysics coupling feature, [The Two-Phase Flow, Phase Field Coupling Feature](#), is

added automatically under the **Multiphysics** node. Note that unlike the Two-Phase Flow, Level Set interfaces, the wetted wall function here is not implemented as a separated multiphase coupling boundary feature but as the default **Wetted Wall** feature of the **Phase Field** interface.



Wetted Wall

Simulations using the Laminar Two-Phase Flow, Phase Field interface are always time-dependent since the position of an interface almost always depends on its history.

INTERFACE PROPERTIES



Discretization

By default the fluid flow discretization is set to **PI+PI**, and the phase field discretization is set to **Linear**. This combination provides improved conservation of the integral of the phase field variable when using the nonconservative form of the phase field equations.



Theory for the Two-Phase Flow Interfaces

The Two-Phase Flow, Phase Field Coupling Feature

The **Laminar Two-Phase Flow, Phase Field**,  and **Turbulent Two-Phase Flow, Phase Field**,  interfaces contain a multiphysics coupling feature, **Two-Phase Flow, Phase Field**, which is added automatically.

The **Two-Phase Flow, Phase Field** multiphysics coupling feature defines the density and dynamic viscosity of the fluid used in the **Laminar Flow** interfaces, and it defines the surface tension on the interface in form of a volume force used in the momentum equation. It also enables the **Phase Field** interface to use the velocity field calculated from the **Laminar Flow** interface to transport the interface.

SETTINGS

The **Label** is the default multiphysics coupling feature name.

The **Name** is used primarily as a scope prefix for variables defined by the coupling node. Refer to such variables in expressions using the pattern `<name>.<variable_name>`. In order to distinguish between variables belonging to different coupling nodes or physics

interfaces, the name string must be unique. Only letters, numbers, and underscores (_) are permitted in the **Name** field. The first character must be a letter.

The default **Name** (for the first multiphysics coupling feature **Two-Phase Flow, Phase Field** in the model) is `tpf1`.

DOMAIN SELECTION

When nodes are added from the context menu, you can select **All domains** (the default) or select **Manual** from the **Selection** list to choose specific domains.

COUPLED INTERFACES

This section controls which individual interfaces are coupled by the current coupling feature. If a physics interface is deleted and then added to the model again, then in order to reestablish the coupling, you need to choose the correct physics interface again from the **Fluid flow** or **Moving interfaces** lists.

MODEL INPUTS

Fluid properties of each phase, such as density, viscosity, or the surface tension coefficient, can be defined through user inputs, variables, or by selecting a material. For the latter option, additional inputs, for example temperature or pressure, may be required to define these properties.


Temperature

By default, the **Temperature** model input is set to **Common model input**, and the temperature is controlled from [Default Model Inputs](#) under **Global Definitions** or by a locally defined [Model Input](#). If a Heat Transfer interface is included in the component, it controls the temperature **Common model input**. Alternatively, the temperature field can be selected from another physics interface. All physics interfaces have their own tags (**Name**). For example, if a Heat Transfer in Fluids interface is included in the component, the **Temperature (ht)** option is available for T .

You can also select **User defined** from the **Temperature** model input in order to manually prescribe T .

Absolute Pressure

This input appears when a material requires the absolute pressure as a model input. The default **Absolute pressure** p_A is $p+p_{\text{ref}}$, where p is the dependent pressure variable from the Navier-Stokes or RANS equations, and p_{ref} is from the user input defined at the fluid flow physics interface level.

The **Absolute pressure** field can be edited by clicking **Make All Model Inputs Editable** () and entering the desired value in the input field.



FLUID PROPERTIES

Use the corresponding section to specify the properties of the two fluids. The fluids are denoted **Fluid 1** and **Fluid 2**, respectively.

To specify the properties of **Fluid 1** from a material, select the appropriate material in the **Fluid 1** list. Also make sure that the **Density of fluid 1** ρ_1 and **Dynamic viscosity of fluid 1** μ_1 are both set to **From Material**.

The density in a material can depend on temperature and/or pressure and these dependencies are automatically replaced by p_{ref} and T_{ref} for incompressible flows (as specified by the **Compressibility** setting of the fluid flow interface).

The non-Newtonian power-law and Carreau models can alternatively be used to specify the dynamic viscosities of the two fluids.

To instead apply a variable or expression for the density or dynamic viscosity for Fluid A, select **User defined** in the **Density of fluid 1** ρ_1 or the **Dynamic viscosity of fluid 1** μ_1 drop down list and enter the expression in the corresponding edit field.

Similarly, the properties of **Fluid 2** can be specified.



Care should be taken when using the **Domain Material** setting for the material properties for Fluid 1 and Fluid 2.

The material properties are obtained from the domain irrespective of the location of the interface. If two different materials are selected in domains 1 and 2, with the phase boundary initially coincident with the domain boundary, the model has convergence issues once the phase boundary moves away from the domain boundary. This is because a density discontinuity and a viscosity discontinuity occurs at the boundary separating the two fluids. For this reason selecting the material directly is recommended when setting the material properties for Fluid 1 and Fluid 2.

The fluid defined as Fluid 1 affects the wetting characteristics on wetted walls. See the [Wetted Wall](#) node for details.

SURFACE TENSION

Select the **Include surface tension force in momentum equation** check box to include the surface tension force in the momentum equation. If the surface tension force is included, select **Include surface tension gradient effects in surface tension force** to account for the Marangoni effect due to gradients in the surface tension coefficient.

Select a **Surface tension coefficient** σ (SI unit: N/m):

- To use a predefined expression, select **Library coefficient, liquid/gas interface** or **Library coefficient, liquid/liquid interface**. Then select an option from the list that displays below (for example, **Water/Air**, **Glycerol/Air** and so forth).
- For **User defined**, enter a value or expression for the surface tension coefficient σ (SI unit: N/m).



Theory for the Level Set and Phase Field Interfaces

Domain, Boundary, Point, and Pair Nodes for the Laminar Flow, Two-Phase, Level Set and Phase Field Interfaces

The Two-Phase Flow, Level Set and Phase Field Interfaces are multiphysics interfaces combining Laminar Flow or Turbulent Flow interfaces together with Level Set or Phase Field interfaces.

LAMINAR FLOW

The available physics features for the Laminar Flow interface are listed in the section [Domain, Boundary, Pair, and Point Nodes for Single-Phase Flow](#).

LEVEL SET

The available physics features for the Level Set Interface are listed in the section [Domain, Boundary, and Pair Nodes for the Level Set Interface](#).

PHASE FIELD

The available physics features for the Phase Field Interface are listed in the section [Domain, Boundary, and Pair Nodes for the Phase Field Interface](#).

All domain, boundary, point, and pair nodes are available from the **Physics** ribbon toolbar (Windows users), **Physics** context menu (Mac or Linux users), or by right-clicking to access the context menu (all users).

The Laminar Three-Phase Flow, Phase Field Interface



This section includes the following topics:

- [The Laminar Three-Phase Flow, Phase Field Interface](#)
- [The Three-Phase Flow, Phase Field Coupling Feature](#)
- [Domain, Boundary, Point, and Pair Nodes for the Laminar Three-Phase Flow, Phase Field Interface](#)



[Mathematics, Moving Interfaces](#)

The Laminar Three-Phase Flow, Phase Field Interface

The **Laminar Three-Phase Flow, Phase Field** interface () is found under the **Multiphase Flow > Three-Phase Flow, Phase Field** branch () is a multiphysics interface designed to track the interfaces between three immiscible and incompressible fluids. The flow is assumed to be laminar, that is, to be of low to moderate Reynolds number. The density of each fluid is assumed to be constant, but there is no restriction on the density differences between the separate fluids.

When adding the **Laminar Three-Phase Flow, Phase Field** multiphysics interface, a **Laminar Flow** and a **Ternary Phase Field** interface are added to the Model Builder. In addition the **Multiphysics** node, including the multiphysics coupling feature **Three-Phase Flow, Phase Field** is added.



[The Multiphysics Branch](#) in the *COMSOL Multiphysics Reference Manual*.

Simulations using the Laminar Three-Phase Flow, Phase Field interface are always time-dependent since the position of an interface is almost always dependent of its history.

INTERFACE PROPERTIES

Turbulence Model

Since the Three-Phase Flow, Phase Field interface assumes laminar flow, the Turbulence Model property in the Laminar Flow interface is deactivated when the interface is added as a part of a multiphysics interface.


Multiphysics Coupling Option

Laminar Flow interfaces coupled to a Three-Phase Flow, Phase Field interface contains a **Multiphysics coupling option** property to control the form of the continuity equation. Adding the Three-Phase Flow, Phase Field interface **Multiphysics coupling option** is automatically set to **Ternary Phase Field**. In this case the following form of the continuity equation, appropriate for high density difference mixtures is used

$$\frac{\partial \log \rho}{\partial t} + \nabla \cdot \mathbf{u} + \mathbf{u} \cdot \nabla \log \rho = 0 \quad (5-2)$$

When **Multiphysics coupling option** is set to **None**, the form of the continuity equation follows the definitions in [Theory for the Single-Phase Flow Interfaces](#).

The Three-Phase Flow, Phase Field Coupling Feature

Use the **Three-Phase Flow, Phase Field**  multiphysics coupling to simulate the flow of a three immiscible fluids while explicitly tracking the interface separating each pair of the fluids.

The Three-Phase Flow interface solves Navier-Stokes equations for the conservation of momentum, and a continuity equation for the conservation of mass. The positions of the interfaces separating the fluid phases are tracked by solving four additional transport equations: two equations governing phase field variables and two equations for the corresponding generalized chemical potentials. The movement of the fluid-fluid interfaces is determined by minimization of free energy.

SETTINGS

The **Label** is the default multiphysics coupling feature name.

The **Name** is used primarily as a scope prefix for variables defined by the coupling node. Refer to such variables in expressions using the pattern <name>.<variable_name>. In order to distinguish between variables belonging to different coupling nodes or physics interfaces, the name string must be unique. Only letters, numbers, and underscores (_) are permitted in the **Name** field. The first character must be a letter.

The default **Name** (for the first multiphysics coupling feature in the model) is `tfpf1`.

DOMAIN SELECTION

When nodes are added from the context menu, you can select **Manual** (the default) from the **Selection** list to choose specific domains to define the three-phase flow, or select **All domains** as needed.

MODEL INPUTS

Fluid properties of each phase, such as density and viscosity, can be defined through user inputs, variables, or by selecting a material. For the latter option, additional inputs, for example temperature or pressure, may be required to define these properties.


Temperature

By default, the **Temperature** model input is set to **Common model input**, and the temperature is controlled from [Default Model Inputs](#) under **Global Definitions** or by a locally defined [Model Input](#). If a Heat Transfer interface is included in the component, it controls the temperature **Common model input**. Alternatively, the temperature field can be selected from another physics interface. All physics interfaces have their own tags (**Name**). For example, if a Heat Transfer in Fluids interface is included in the component, the **Temperature (ht)** option is available for T .

You can also select **User defined** from the **Temperature** model input in order to manually prescribe T .

Absolute Pressure

This input appears when a material requires the absolute pressure as a model input. The default **Absolute pressure** p_A is $p+p_{\text{ref}}$, where p is the dependent pressure variable from the Navier-Stokes or RANS equations, and p_{ref} is from the user input defined at the fluid flow physics interface level.

The **Absolute pressure** field can be edited by clicking **Make All Model Inputs Editable** () and entering the desired value in the input field.



[Model Inputs and Multiphysics Couplings](#) in the *COMSOL Multiphysics Reference Manual*

FLUID PROPERTIES

Use the corresponding section to specify the properties of all three fluids. The fluids are denoted **Fluid A**, **Fluid B**, and **Fluid C**, respectively.

To specify the properties of **Fluid A** from a material, select the appropriate material in the **Fluid A** list. Also make sure that the **Density of fluid A** ρ_A and **Dynamic viscosity of fluid A** μ_A are both set to **From material**.

The density in a material can depend on temperature and/or pressure and these dependencies are automatically replaced by p_{ref} and T_{ref} for incompressible flows (as specified by the **Compressibility** setting of the laminar flow interface).

The non-Newtonian power-law and Carreau models can alternatively be used to specify the dynamic viscosities of the three fluids.

To instead apply a variable or expression for the density or dynamic viscosity for Fluid A, select **User defined** in the **Density of fluid A** ρ_A or the **Dynamic viscosity of fluid A** μ_A list and enter the expression in the corresponding edit field.

COUPLED INTERFACES

This section controls which individual interfaces are coupled by the current coupling feature. If a physics interface is deleted and then added to the model again, then in order to reestablish the coupling, you need to choose the correct physics interface again from the **Fluid flow** or **Moving interfaces** lists.



- [Theory for the Level Set and Phase Field Interfaces](#)
-

Domain, Boundary, Point, and Pair Nodes for the Laminar Three-Phase Flow, Phase Field Interface

The [Laminar Three-Phase Flow, Phase Field Interface](#) is a multiphysics interface combining [The Laminar Flow Interface](#) and [The Ternary Phase Field Interface](#).

LAMINAR FLOW



The available physics features for [The Laminar Flow Interface](#) are listed in [Domain, Boundary, Pair, and Point Nodes for Single-Phase Flow](#).

TERNARY PHASE-FIELD

The available physics features for [The Ternary Phase Field Interface](#) are listed in [Domain, Boundary, and Pair Nodes for the Ternary Phase Field Interface](#).

All domain, boundary, point, and pair nodes are available from the **Physics** ribbon toolbar (Windows users), **Physics** context menu (Mac or Linux users), or by right-clicking to access the context menu (all users).

The Laminar Two-Phase Flow, Moving Mesh Interface

The **Laminar Two-Phase Flow, Moving Mesh** interface () , found under the **Multiphase Flow>Two-Phase Flow, Moving Mesh** branch () , is a multiphysics interface designed to model laminar two-phase flow of immiscible fluids separated by a moving interface. The velocity field, pressure, and mesh deformation are solved for, and the location of the interface is tracked by the deformed mesh.

When adding the **Laminar Two-Phase Flow, Moving Mesh** multiphysics interface, a **Laminar Flow** interface is added to the component, and a **Moving Mesh** interface with a **Deforming Domain** feature is added under the **Definitions** node. The **Laminar Flow** interface adds the Navier–Stokes equations and provides a way of defining the properties of the fluids. For each of the fluids the density and viscosity must be specified (these are typically taken from the corresponding materials, but can be user defined).

Simulations using the **Laminar Two-Phase Flow, Moving Mesh** interface are always time-dependent since the position of an interface is almost always dependent of its history. There are additional boundary conditions to describe how the fluid-fluid interface moves from the **Laminar Flow** context menu under the option **Two-Phase Flow, Moving Mesh**:

- [Fluid-Fluid Interface](#)
- [External Fluid Interface](#)
- [Wall-Fluid Interface](#) (as a subfeature to the two conditions above)



In previous versions of COMSOL Multiphysics (prior to version 5.4), a specific physics interface called **Laminar Two-Phase Flow, Moving Mesh (tpfmm)** was added to the **Model Builder**. Now, a predefined multiphysics coupling approach is used, improving the flexibility and design options for your modeling. For specific details, see [The Multiphysics Branch](#) and [Multiphysics Modeling Workflow](#) in the *COMSOL Multiphysics Reference Manual*.

Select Laminar Flow Properties

For a full list of available properties, see [The Laminar Flow Interface](#).

PHYSICAL MODEL

This physics interface deforms the mesh within the domains on either side of the two fluid interfaces to track its movement.

The **Compressibility** defaults to **Incompressible flow** to use the incompressible (constant density) formulation of the Navier-Stokes equations. Select **Compressible flow (Ma<0.3)** to use the compressible formulation.

If flow is occurring at very low Reynolds numbers, the inertial term in the Navier-Stokes equations can be neglected and the linear Stokes equations can be solved on the domain. This flow type is referred to as *creeping flow* or *Stokes flow* and can occur in microfluidics and MEMS devices, where the flow length scales are very small. To make this approximation select the **Neglect inertial term (Stokes flow)** check box, which significantly improves the solver speed.

Enter a **Reference pressure level** p_{ref} (SI unit: Pa). The default value is 1 [atm].

DEPENDENT VARIABLES

The dependent variables (field variables) are for the **Velocity field** and **Pressure**. The names can be changed in the corresponding fields, but the names of fields and dependent variables must be unique within a model.



The following models are found at this Application Library path
Microfluidics_Module/Two_Phase_Flow>[filename]

- *Drug Delivery System*: **viscous_catenary**
 - *Jet Instability — Moving Mesh*: **jet_instability**
 - *Electrowetting Lens*: **electrowetting_lens**
 - *Viscous Catenary*: **viscous_catenary**
-

Deforming Domain

When the **Laminar Two-Phase Flow, Moving Mesh** multiphysics interface is added using the **Model Wizard**, a **Deforming Domain** node is added automatically in the **Model Builder** under the **Definitions>Moving Mesh** node. This node serves to represent domains and boundaries where the mesh can deform. By default, the selection is all domains. Under

the **Deforming Domain**, you can also choose the **Mesh smoothing type**, by default set to **Yeoh** with a default **Stiffening factor** of 10. More information of the smoothing type can be found in the [Deforming Domain](#) chapter in the *COMSOL Multiphysics Reference Manual*.

By default, the mesh is fixed at all external boundaries of the geometry. Use the [Symmetry/Roller](#) node to select the external boundaries, where the fluid-fluid interface can slide along the boundary. You can also add other types of boundary conditions for the mesh motion, for details see [Moving Mesh Features](#) in the *COMSOL Multiphysics Reference Manual*.

Fluid-Fluid Interface

The **Fluid-Fluid Interface** node defines the initial position of a fluid-fluid interface and includes equations to track the evolution of the interface. The [Wall-Fluid Interface](#) subnode is added by default, and is also available from the context menu (right-click the parent node) or from the **Physics** toolbar, **Attributes** menu.

MODEL INPUT

Enter a value for the **Temperature T** (SI unit: K). This option is only necessary when the surface tension coefficient comes from a library of coefficients, as explained below.

SURFACE TENSION

Select the **Include surface tension force in momentum equation** check box to include the surface tension force in the momentum equation.

The **Surface tension coefficient** σ (SI unit: N/m) can be **User defined**, or select **Library coefficient, liquid/gas interface** (default) or **Library coefficient, liquid/liquid interface**.

- For **Library coefficient, liquid/gas interface** select an option from the list — **Water/Air** (default), **Acetone/Air**, **Acetic acid/Air**, **Ethanol/Air**, **Ethylene glycol/Ethylene glycol vapor**, **Diethyl ether/Air**, **Glycerol/Air**, **Heptane/Nitrogen**, **Mercury/Mercury vapor**, or **Toluene/Air**.
- For **Library coefficient, liquid/liquid interface** select an option from the list — **Benzene/Water, 20°C**, **Corn oil/Water, 20°C**, **Ether/Water, 20°C**, **Hexane/Water, 20°C**, **Mercury/Water, 20°C**, or **Olive oil/Water, 20°C**.

MASS FLUX

The mass flux setting specifies the mass transfer across the boundary, due to processes such as boiling. The default **Mass Flux** M_f (SI unit: $\text{kg}/(\text{m}^2\cdot\text{s})$) is **User defined**, with a value of 0.

NORMAL DIRECTION

The normal direction on the selected boundaries can be reversed by selecting **Reverse normal direction**. The direction is indicated by a red arrow in the Graphics window.

LOCATION IN USER INTERFACE

Context Menus

Right click the physics interface and select **Two-Phase Flow, Moving Mesh>Fluid-Fluid Interface**

Ribbon

Physics tab with **Laminar Flow** selected:

Boundaries>Two-Phase Flow, Moving Mesh>Fluid-Fluid Interface



The **Fluid-Fluid Interface** feature imposes a mesh deformation in the normal direction. On adjacent boundaries, the mesh displacement parallel to those boundaries cannot be fixed if the contact point is moving. In this case a [Mesh Slip](#), [Symmetry/Roller](#), [Prescribed Normal Mesh Displacement](#), or [Prescribed Normal Mesh Velocity](#) boundary condition under **Definitions>Moving Mesh** should be selected. A [Mesh Slip](#) condition is automatically used on boundaries that are adjacent to the Fluid-Fluid Interface and do not have a prescribed Moving Mesh boundary condition.



If a **Fluid-Fluid Interface** feature is in contact with a solid boundary, the movement of the contact point is not compatible with the no slip condition. For laminar flow the [Wall](#) boundary condition with the [Navier Slip](#) option should be selected.

External Fluid Interface

The **External Fluid Interface** node defines the initial position of an external fluid interface - that is, an interface in which the viscosity in the fluid outside the domain can be neglected. It also includes equations to model the interface. The [Wall-Fluid Interface](#) subnode is available from the context menu (right-click the parent node) or from the **Physics** toolbar, **Attributes** menu.

MODEL INPUT

Enter a value for the **Temperature** T (SI unit: K). This option is only necessary when the surface tension coefficient comes from a library of coefficients, as explained below.

FREE SURFACE

Enter an **External pressure** p_{ext} (SI unit: Pa).

SURFACE TENSION

Select the **Include surface tension force in momentum equation** check box to include the surface tension force in the momentum equation.

The default **Surface tension coefficient** σ (SI unit: N/m) can be **User defined**, or select **Library coefficient, liquid/gas interface** (default) or **Library coefficient, liquid/liquid interface**.

- For **Library coefficient, liquid/gas interface** select an option from the list — **Water/Air** (default), **Acetone/Air**, **Acetic acid/Air**, **Ethanol/Air**, **Ethylene glycol/Ethylene glycol vapor**, **Diethyl ether/Air**, **Glycerol/Air**, **Heptane/Nitrogen**, **Mercury/Mercury vapor**, or **Toluene/Air**.
- For **Library coefficient, liquid/liquid interface** select an option from the list — **Benzene/Water, 20°C**, **Corn oil/Water, 20°C**, **Ether/Water, 20°C**, **Hexane/Water, 20°C**, **Mercury/Water, 20°C**, or **Olive oil/Water, 20°C**.

MASS FLUX

The mass flux setting specifies the mass transfer across the boundary, due to processes such as boiling. The default **Mass Flux** M_f (SI unit: $\text{kg}/(\text{m}^2 \cdot \text{s})$) is **User defined**, with a value of 0.

LOCATION IN USER INTERFACE

Context Menus

Laminar Flow>Two-Phase Flow, Moving Mesh>External Fluid Interface

Ribbon

Physics tab with **Laminar Flow** selected:

Boundaries>Two-Phase Flow, Moving Mesh>External Fluid Interface



The **External Fluid Interface** feature imposes a mesh deformation in the normal direction. On adjacent boundaries, the mesh displacement parallel to those boundaries cannot be fixed if the contact point is moving. In this case a [Mesh Slip](#), [Symmetry/Roller](#), [Prescribed Normal Mesh Displacement](#), or [Prescribed Normal Mesh Velocity](#) boundary condition under **Definitions>Moving Mesh** should be selected. A [Mesh Slip](#) condition is automatically used on boundaries that are adjacent to the External Fluid Interface and do not have a prescribed Moving Mesh boundary condition.



If an **External Fluid Interface** feature is in contact with a solid boundary, the movement of the contact point is not compatible with the no slip condition. For laminar flow the [Wall](#) boundary condition with the [Navier Slip](#) option should be selected.

Wall-Fluid Interface

The **Wall Fluid Interface** subnode is available from the context menu (right-click the [Fluid-Fluid Interface](#) and [External Fluid Interface](#) parent node) or from the **Physics** toolbar, **Attributes** menu. The condition applies forces on the wall that balance the surface tension for the prescribed contact angle. Note that the contact angle can only be enforced when the surface tension force is included in the momentum equation in the parent feature.

For laminar flow, the **Wall-Fluid Interface** node should be used on edges or points where a [Wall](#) feature with the [Navier Slip](#) option is prescribed adjacent to the free surface. In this case, the **Navier Slip** option is required for the contact line to move along the wall.

The representation of the contact angle is dependent on the mesh resolution in the region where the fluid-fluid interface attaches to the wall. If, during the simulation, the contact angle is found to fluctuate around a given value, this indicates that the resolution needs to be improved. This can for example be achieved by adding more mesh boundary layers on the wall.

WALL-FLUID INTERFACE

Select an option from the **Specify contact angle list** — **Directly** (the default) or **Through Young's equation**.

- For **Directly** enter a **Contact angle** θ_w (SI unit: rad). The default is $\pi/2$ radians.
- For **Through Young's equation** enter values or expressions for **Phase 1-Solid surface energy density** γ_{s1} (SI unit: J/m²) and **Phase 2-Solid surface energy density** γ_{s2} (SI unit: J/m²).

NORMAL WALL VELOCITY

Select whether to **Constrain the wall-normal velocity**. This ensures that the fluid velocity normal to the wall on the contact edge or point is exactly the desired value. This can be helpful when the adjacent wall uses a [Discontinuous Galerkin Formulation](#) and the no-penetration condition is satisfied in an integral sense rather than pointwise. Moreover, constraining the wall-normal velocity simplifies the equilibrium of forces in the wall-normal direction. This setting should not be selected when the adjacent boundary has an unknown velocity.



The contact angle θ_w is defined between the fluid-fluid interface and the surface of the wall adjacent to phase 1.



The moving mesh boundary condition must be compatible with the motion of the wall for the problem to have a valid solution.

Theory for the Level Set and Phase Field Interfaces

The Two-Phase Flow, Level Set and Phase Field interfaces can be used to model the flow of two different, immiscible fluids, where the exact position of the interface between the two fluids is of interest. The fluid-fluid interface is tracked using an auxiliary function on a fixed mesh. These methods account for differences in the two fluids' densities and viscosities and include the effects of surface tension and gravity.

The [Laminar Two-Phase Flow, Level Set and Laminar Two-Phase Flow, Phase Field Interfaces](#) theory is described in this section:

- [Level Set and Phase Field Equations](#)
- [Conservative and Nonconservative Formulations](#)
- [Phase Initialization](#)
- [Numerical Stabilization](#)
- [References for the Level Set and Phase Field Interfaces](#)

Level Set and Phase Field Equations

By default, the Level Set and Phase Field interfaces use the incompressible formulation of the Navier-Stokes equations:

$$\rho \frac{\partial \mathbf{u}}{\partial t} + \rho(\mathbf{u} \cdot \nabla) \mathbf{u} = \nabla \cdot [-p \mathbf{I} + \mu(\nabla \mathbf{u} + \nabla \mathbf{u}^T)] + \mathbf{F}_g + \mathbf{F}_{st} + \mathbf{F}_{ext} + \mathbf{F} \quad (5-3)$$

$$\nabla \cdot \mathbf{u} = 0 \quad (5-4)$$

Note that [Equation 5-3](#), and [Equation 5-4](#) are solved in the contained interface, **Laminar Flow** or **Turbulent Flow** interface. Note that the form of the continuity equation, appropriate for high density difference mixtures, differs from the definition in [Theory for the Single-Phase Flow Interfaces](#).

USING THE LEVEL SET METHOD

If the level set method is used to track the interface, it adds the following equation:

$$\frac{\partial \phi}{\partial t} + \mathbf{u} \cdot \nabla \phi = \gamma \nabla \cdot \left(\varepsilon \nabla \phi - \phi(1-\phi) \frac{\nabla \phi}{|\nabla \phi|} \right) \quad (5-5)$$

where γ is the reinitialization parameter (set to 1 by default), and ε is the interface thickness controlling parameter (set to $h_{\max}/2$ where h_{\max} is the maximum element size in the component). The density is a function of the level set function defined as

$$\rho = \rho_1 + (\rho_2 - \rho_1)\phi$$

and the dynamic viscosity is given by

$$\mu = \mu_1 + (\mu_2 - \mu_1)\phi$$

where ρ_1 and ρ_2 are the constant densities of Fluid 1 and Fluid 2, respectively, and μ_1 and μ_2 are the dynamic viscosities of Fluid 1 and Fluid 2, respectively. Here, Fluid 1 corresponds to the domain where $\phi < 0.5$, and Fluid 2 corresponds to the domain where $\phi > 0.5$.

Further details of the theory for the level set method are in [Ref. 1](#).

USING THE PHASE FIELD METHOD

If the phase field method is used to track the interface, it adds the following equations:

$$\frac{\partial \phi}{\partial t} + \mathbf{u} \cdot \nabla \phi = \nabla \cdot \frac{\gamma \lambda}{\varepsilon^2} \nabla \psi \quad (5-6)$$

$$\psi = -\nabla \cdot \varepsilon^2 \nabla \phi + (\phi^2 - 1)\phi + \left(\frac{\varepsilon^2}{\lambda} \right) \frac{\partial f_{\text{ext}}}{\partial \phi} \quad (5-7)$$

where the quantity λ (SI unit: N) is the mixing energy density and ε (SI unit: m) is a capillary width that scales with the thickness of the interface. These two parameters are related to the surface tension coefficient, σ (SI unit: N/m), through the equation

$$\sigma = \frac{2\sqrt{2}\lambda}{3\varepsilon}$$

and γ is the mobility parameter which is related to ε through $\gamma = \chi \varepsilon^2$ where χ is the mobility tuning parameter (set to 1 by default). The volume fraction of Fluid 2 is computed as

$$V_f = \min(\max([(1 + \phi)/2], 0), 1)$$

where the \min and \max operators are used so that the volume fraction has a lower limit of 0 and an upper limit of 1. The density is then defined as

$$\rho = \rho_1 + (\rho_2 - \rho_1)V_f$$

and the dynamic viscosity according to

$$\mu = \mu_1 + (\mu_2 - \mu_1)V_f$$

where ρ_1 and ρ_2 are the densities and μ_1 and μ_2 are the dynamic viscosities of Fluid 1 and Fluid 2, respectively.

The mean curvature (SI unit: 1/m) can be computed by entering the following expression:

$$\kappa = 2(1 + \phi)(1 - \phi)\frac{G}{\sigma}$$

where G is the chemical potential defined as:

$$G = \lambda\left(-\nabla^2\phi + \frac{\phi(\phi^2 - 1)}{\varepsilon^2}\right) + \frac{\partial f}{\partial \phi}$$

Details of the theory for the phase field method are found in [Ref. 2](#).

FORCE TERMS

The four forces on the right-hand side of [Equation 5-3](#) are due to gravity, surface tension, a force due to an external contribution to the free energy (using the phase field method only), and a user-defined volume force.

The Surface Tension Force for the Level Set Method

For the level set method, the surface tension force acting on the interface between the two fluids is:

$$\mathbf{F}_{st} = \sigma\delta\kappa\mathbf{n} + \delta\nabla_s\sigma$$

where σ is the surface tensions coefficient (SI unit: N/m), \mathbf{n} is the unit normal to the interface, and $\kappa = -\nabla \cdot \mathbf{n}$ is the curvature. δ (SI unit: 1/m) is a Dirac delta function located at the interface. ∇_s is the surface gradient operator

$$\nabla_s = (\mathbf{I} - \mathbf{n}\mathbf{n}^T)\nabla$$

The δ -function is approximated by a smooth function according to

$$\delta = 6|\nabla\phi||\phi(1-\phi)|$$

The Surface Tension Force for the Phase Field Method

The surface tension force for the phase field method is implemented as a body force

$$\mathbf{F}_{\text{st}} = \left(G - \frac{\partial f}{\partial \phi} \right) \nabla \phi$$

where G is the chemical potential (SI unit: J/m³) defined in [The Equations for the Phase Field Method](#) and $\partial f/\partial \phi$ is a user-defined source of free energy. If **Include surface tension gradient effects in surface tension force** is selected, extra terms are added to account for the Marangoni effect due to gradients in the surface tension coefficient (see [Ref. 6](#)):

$$\mathbf{F}_{\text{st}} = \left(G - \frac{\partial f}{\partial \phi} \right) \nabla \phi + \left(\frac{|\nabla \phi|^2}{2\partial \phi} + \frac{(\phi^2 - 1)^2}{4\varepsilon^2} \right) \nabla \lambda - (\nabla \lambda \cdot \nabla \phi) \nabla \phi$$

The Gravity Force

The gravity force is $\mathbf{F}_{\mathbf{g}} = \rho \mathbf{g}$ where \mathbf{g} is the gravity vector. Add this as a Gravity feature to the fluid domain.

The User Defined Volume Force

When using a Phase Field interface, a force arising due to a user-defined source of free energy is computed according to:

$$\mathbf{F}_{\text{ext}} = \left(\frac{\partial f}{\partial \phi} \right) \nabla \phi$$

This force is added when a ϕ -derivative of the external free energy has been defined in the External Free Energy section of the Fluid Properties feature.

Conservative and Nonconservative Formulations

When the velocity field is divergence free, you can use either the conservative or the nonconservative formulation of the level set or phase field equation. The conservative form perfectly conserves the mass of each fluid, but the computational time is generally longer.

When the Level Set or Phase Field interface are coupled to a fluid flow interface by means of [The Two-Phase Flow, Level Set Coupling Feature](#) or [The Two-Phase Flow, Phase Field Coupling Feature](#), improved conservation of the integral of the level set or

phase field variable is obtained using the nonconservative form provided that the discretization order of the level set or phase field variable is equal to or lower than the order of the pressure.

Phase Initialization

If the study type Transient with Phase Initialization is used in the model, the level set or phase field variable is automatically initialized. For this study, two study steps are created, Phase Initialization and Time Dependent. The Phase Initialization step solves for the distance to the initial interface, D_{wi} . The Time Dependent step then uses the initial condition for the level set function according to the following expression:

$$\phi_0 = \frac{1}{1 + e^{D_{wi}/\varepsilon}}$$

in domains initially filled with Fluid 1 and

$$\phi_0 = \frac{1}{1 + e^{-D_{wi}/\varepsilon}}$$

in domains initially filled with Fluid 2.

Correspondingly, for the phase field method the following expressions are used:

$$\phi_0 = -\tanh\left(\frac{D_{wi}}{\sqrt{2}\varepsilon}\right)$$

in Fluid 1 and

$$\phi_0 = \tanh\left(\frac{D_{wi}}{\sqrt{2}\varepsilon}\right)$$

in Fluid 2. The initial condition for the help variable is $\psi_0 = 0$. These expressions are based on the analytical solution of the steady state solution of [Equation 5-5](#), [Equation 5-6](#), and [Equation 5-7](#) for a straight, non-moving interface.



For the initialization to work it is crucial that there are two **Initial Values** nodes and one **Initial Interface** node. One of the Initial Values nodes should use **Specify phase: Fluid 1** and the other **Specify phase: Fluid 2**. The **Initial Interface** node is not default but can be added and should have all interior boundaries where the interface is initially present as selection. If the selection of the **Initial Interface** node is empty, the initialization fails. Note that when the value of **Level set variable** or **Phase field variable** is **User defined**, arbitrary user defined initial values are used. In this case, no **Initial Interface** node should be added, and a Time Dependent study should be used instead of [Time Dependent with Phase Initialization](#).



- [The Laminar Two-Phase Flow, Level Set and Laminar Two-Phase Flow, Phase Field Interfaces](#)
- [Studies and Solvers and Time Dependent with Phase Initialization in the COMSOL Multiphysics Reference Manual](#)

Numerical Stabilization

Three types of stabilization methods are available for the flow (Navier-Stokes) and interface (level set or phase field) equations. Two are consistent stabilization methods — Streamline diffusion and Crosswind diffusion — and one is inconsistent — Isotropic diffusion.

To display this section, click the **Show More Options** button () and select **Stabilization** from the **Show More Options** dialog box.



- [Theory for the Level Set and Phase Field Interfaces](#)
- [Override and Contribution in the COMSOL Multiphysics Reference Manual](#)

References for the Level Set and Phase Field Interfaces

1. E. Olsson and G. Kreiss, “A Conservative Level Set Method for Two Phase Flow”, *J. Comput. Phys.*, vol. 210, pp. 225–246, 2005.
2. P. Yue, J.J. Feng, C. Liu, and J. Shen, “A Diffuse-interface Method for Simulating Two-phase Flows of Complex Fluids”, *J. Fluid Mech.*, vol. 515, pp. 293–317, 2004.
3. B. Lafaurie, C. Nardone, R. Scardovelli, S. Zaleski, and G. Zanetti “Modelling Merging and Fragmentation in Multiphase Flows with SURFER.”, *J. Comput. Phys.*, vol. 113, no. 1, pp. 134–147, 1994.
4. Y. D. Shikhmurzaev, “The Moving Contact line on a Smooth Solid Surface”, *Int. J. Multiph. Flow*, vol. 19, no. 4, pp. 589–610, 1993.
5. J. F. Gerbeau and T. Lelièvre, “Generalized Navier Boundary Condition and Geometric Conservation Law for surface tension”, *Comput. Methods Appl. Mech. Eng.*, vol. 198, no. 5-8, pp. 644–656, 2009.
6. C. Liu, J. Shen, J. J. Feng, and P. Yue, “Variational Approach in Two-Phase Flows of Complex Fluids: Transport and Induced Elastic Stress”, Chapter 11 in *Mathematical Models and Methods in Phase Transitions*, Alan Miranville, ed, Nova Publishers, pp. 259-278, 2005.

Theory for the Three-Phase Flow, Phase Field Interface

The Three-Phase Flow, Phase Field interface can be used to model the flow and interaction of three different, immiscible fluids, when the exact positions of the interfaces separating the fluids are of interest. The fluid-fluid interfaces are tracked using a ternary phase field formulation which account for differences in the fluids' densities and viscosities and include the effects of surface tension.

The [Laminar Three-Phase Flow, Phase Field Interface](#) theory is described in the following sections:

- [Governing Equations of the Three-Phase Flow, Phase Field Interface](#)
- [Reference for the Three-Phase Flow, Phase Field Interface](#)

Governing Equations of the Three-Phase Flow, Phase Field Interface

LAMINAR FLOW EQUATIONS

The Three-Phase Flow, Phase Field interface is used to study the evolution of three immiscible fluid phases denoted by fluid *A*, fluid *B*, and fluid *C*. The interface solves the Navier-Stokes equations governing conservation of momentum and mass. The momentum equations solved correspond to

$$\rho \frac{\partial \mathbf{u}}{\partial t} + \rho(\mathbf{u} \cdot \nabla) \mathbf{u} = \nabla \cdot \left[-p \mathbf{I} + \mu(\nabla \mathbf{u} + \nabla \mathbf{u}^T) - \frac{2}{3} \mu(\nabla \cdot \mathbf{u}) \mathbf{I} \right] + \mathbf{F}_{st} + \mathbf{F} \quad (5-8)$$

where \mathbf{F}_{st} is the surface tension force. The physics interface assumes that the density of each phase is constant. The density may however vary between the phases. In order to accurately handle systems where density of the phases are significantly different, as well as systems with phases of similar density, the following fully compressible continuity equation is solved by the interface

$$\frac{\partial \log \rho}{\partial t} + \nabla \cdot \mathbf{u} + \mathbf{u} \cdot \nabla \log \rho = 0 \quad (5-9)$$

TERNARY PHASE FIELD EQUATIONS

In order to track the interfaces between three immiscible fluids, a ternary phase field model based on the work of Boyer and co-workers in [Ref. 1](#) is used. The model solves the following Cahn-Hilliard equations

$$\begin{aligned} \frac{\partial \phi_i}{\partial t} + \nabla \cdot (\mathbf{u} \phi_i) &= \nabla \cdot \left(\frac{M_0}{\Sigma_i} \nabla \eta_i \right) \\ \eta_i &= \frac{4 \Sigma_T}{\varepsilon} \sum_{j \neq i} \left(\frac{1}{\Sigma_j} \left(\frac{\partial F}{\partial \phi_i} - \frac{\partial F}{\partial \phi_j} \right) \right) - \frac{3}{4} \varepsilon \Sigma_j \nabla^2 \phi_i \end{aligned} \quad (5-10)$$

governing the phase field variable, ϕ_i , and a generalized chemical potential, η_i , of each phase $i = A, B, C$. The phase field variables vary between 0 and 1 and are a measure of the concentration of each phase. The phase field variable for phase A is one in instances containing only this phase, and zero where there is no phase A . Since the fluids are immiscible, variations in the phase field variable occur, and define the interface separating two phases. At each point the phase field variables satisfy the following constraint

$$\sum_{i=A,B,C} \phi_i = 1 \quad (5-11)$$

The density of each phase is assumed to be constant which implies that the phase field variable corresponds to the volume fraction of the phase in question. In order to satisfy [Equation 5-11](#), two sets of the equations shown in [Equation 5-10](#) are solved, namely those for phase A and phase B . The phase field variable, and correspondingly the mass fraction, for fluid C is computed from [Equation 5-11](#).

The density and viscosity of the fluid mixture used in [Equation 5-3](#) and [5-4](#) are defined as:

$$\begin{aligned} \rho &= \rho_A \phi_A + \rho_B \phi_B + \rho_C \phi_C \\ \mu &= \mu_A \phi_A + \mu_B \phi_B + \mu_C \phi_C \end{aligned} \quad (5-12)$$

Free energy

The free energy of the three phase system is defined as a function of the phase field variables in the manner of:

$$F = \sigma_{AB}\phi_A^2\phi_B^2 + \sigma_{AC}\phi_A^2\phi_C^2 + \sigma_{BC}\phi_B^2\phi_C^2 + \phi_A\phi_B\phi_C(\Sigma_A\phi_A + \Sigma_B\phi_B + \Sigma_C\phi_C) + \Lambda\phi_A^2\phi_B^2\phi_C^2 \quad (5-13)$$

Here the σ_{ij} denotes the surface tension coefficient of the interface separating phase i and j , and the capillary parameters Σ_i are defined for each phase in the manner of:

$$\begin{aligned} \Sigma_A &= \sigma_{AB} + \sigma_{AC} - \sigma_{BC} \\ \Sigma_B &= \sigma_{AB} + \sigma_{BC} - \sigma_{AC} \\ \Sigma_C &= \sigma_{BC} + \sigma_{AC} - \sigma_{AB} \end{aligned} \quad (5-14)$$

Λ in the free energy is a function or parameter specifying the additional free bulk energy of the system. By default Λ is zero. In this case it can be seen that the free energy in Equation 5-13 represents the mixing energy, since only interfaces between two phases (where two phase field variables varies between the limiting values) contributes to the free energy.

Ternary Phase Field parameters

In Equation 5-10, ϵ (SI unit: 1/m) is a parameter controlling the interface thickness, M_0 (SI unit: m³/s) is a molecular mobility parameter, and the parameter Σ_T is defined as

$$\frac{3}{\Sigma_T} = \frac{1}{\Sigma_A} + \frac{1}{\Sigma_B} + \frac{1}{\Sigma_C} \quad (5-15)$$

When using the interface it is recommended that the parameter ϵ is given a value in the same order as the elements in the regions passed by the fluid-fluid interfaces. The mobility determines the time scale of the Cahn-Hilliard diffusion and must be large enough to retain a constant interfacial thickness, but small enough to avoid damping the convective transport. In order to ensure that the mobility is in the correct range, it is recommended to apply a mobility parameter such that the following holds approximately

$$M_0 = L_c U_c \epsilon \cdot 10^{-2} \quad (5-16)$$

where L_c and U_c are the characteristic length and velocity scales of the system at hand.

SURFACE TENSION

The surface tension force applied in the momentum equations (Equation 5-3) as a body force computed from the generalized chemical potentials:

$$\mathbf{F}_{\text{st}} = \sum_{i=A,B,C} \eta_i \nabla \phi_i \quad (5-17)$$

Reference for the Three-Phase Flow, Phase Field Interface

I. F. Boyer, C. Lapuerta, S. Minjeaud, B. Piar, and M. Quintard,
“Cahn-Hilliard/Navier-Stokes model for the simulation of three-phase flows”,
Transport in Porous Media, vol. 28, pp. 463–484, 2010.

Theory for the Two-Phase Flow, Moving Mesh Interface

The [Laminar Two-Phase Flow, Moving Mesh Interface](#) can be used to model the flow of two different, immiscible fluids, when the exact position of the interface is of interest. The interface position is tracked by a moving mesh, with boundary conditions that account for surface tension and wetting, as well as mass transport across the interface.

In this section:

- [Domain Level Fluid Flow](#)
- [About the Moving Mesh](#)
- [About the Fluid Interface Boundary Conditions](#)
- [Wall-Fluid Interface Boundary Conditions](#)
- [References for the Two-Phase Flow, Moving Mesh Interface](#)

Domain Level Fluid Flow

Two Phase Flow Moving Mesh interface is a predefined physics interface coupling between a Single-Phase Flow interface and the Moving Mesh interface. Within the domains corresponding to individual phases the fluid flow is solved using the Navier-Stokes equations as in the Laminar Flow interface. The general form for the isothermal Navier-Stokes equations is:

$$\frac{\partial \rho}{\partial t} + \nabla \cdot (\rho \mathbf{u}) = 0$$

$$\rho \frac{\partial \mathbf{u}}{\partial t} + \rho (\mathbf{u} \cdot \nabla) \mathbf{u} = \nabla \cdot [-p \mathbf{I} + \boldsymbol{\tau}] + \mathbf{F}$$

where:

- ρ is the density (SI unit: kg/m^3)
- \mathbf{u} is the velocity vector (SI unit: m/s)
- p is pressure (SI unit: Pa)
- \mathbf{F} is the volume force vector (SI unit: N/m^3)

- τ is the viscous stress tensor (SI unit: Pa).

For a Newtonian fluid the viscous stress tensor, τ , is given by:

$$\tau = 2\mu\mathbf{S} - \frac{2}{3}\mu(\nabla \cdot \mathbf{u})\mathbf{I} \quad (5-18)$$

The dynamic viscosity μ (SI unit: Pa·s) is allowed to depend on the thermodynamic state but not on the velocity field.



Theory for the Single-Phase Flow Interfaces

About the Moving Mesh

The mesh within the fluid flow domain is deformed to account for the movement of the interface between the two fluids. The software perturbs the mesh nodes so they conform with the moving interface and with other moving or stationary boundaries in the model. The boundary displacement is propagated throughout the domain to obtain a smooth mesh deformation everywhere. This is done by solving equations for the mesh displacements (a Laplace, Winslow, or hyperelastic smoothing equation). Taking two dimensions as an example, a location in the deformed mesh with coordinates (x, y) can be related to its coordinates in the original undeformed mesh (X, Y) by a function of the form:

$$x = x(X, Y, t), \quad y = y(X, Y, t)$$

The original, undeformed, mesh is referred to as the *material frame* (or reference frame) whilst the deformed mesh is called the *spatial frame*. COMSOL Multiphysics also defines *geometry* and *mesh frames*, which are coincident with the material frame for this physics interface.

The fluid flow equations (along with other coupled equations such as electric fields or chemical species transport) are solved in the spatial frame in which the mesh is perturbed. The movement of the phase boundary is therefore accounted for in these interfaces.



Deformed Geometry and Moving Mesh in the *COMSOL Multiphysics Reference Manual*

About the Fluid Interface Boundary Conditions

The interfaces between phases are tracked with specific boundary conditions for the mesh displacement and the fluid flow. Two options are available — [External Fluid Interface](#) and [Fluid-Fluid Interface](#). The External Fluid Interface boundary condition is appropriate when the viscosity of the external fluid is negligible compared to that of the internal fluid. In this case the pressure of the external fluid is the only parameter required to model the fluid and the flow is not solved for in the external fluid. For a fluid-fluid interface the flow is solved for both phases.

FLUID-FLUID INTERFACE

The boundary conditions applied at an interface between two immiscible fluids, fluid 1 and fluid 2 (see [Figure 5-2](#)), are given by ([Ref. 1](#)):

$$\mathbf{u}_1 = \mathbf{u}_2 + \left(\frac{1}{\rho_1} - \frac{1}{\rho_2} \right) M_f \mathbf{n}_i \quad (5-19)$$

$$\mathbf{n}_i \cdot \boldsymbol{\tau}_2 = \mathbf{n}_i \cdot \boldsymbol{\tau}_1 + \mathbf{f}_{st} \quad (5-20)$$

$$\mathbf{u}_{mesh} = \left(\mathbf{u}_1 \cdot \mathbf{n}_i - \frac{M_f}{\rho_1} \right) \mathbf{n}_i \quad (5-21)$$

where \mathbf{u}_1 and \mathbf{u}_2 are the velocities of the fluids 1 and 2 respectively, \mathbf{u}_{mesh} is the velocity of the mesh at the interface between the two fluids, \mathbf{n}_i is the normal of the interface (outward from the domain of fluid 1), $\boldsymbol{\tau}_1$ and $\boldsymbol{\tau}_2$ are the total stress tensors in domains 1 and 2 respectively, \mathbf{f}_{st} is the force per unit area due to the surface tension and M_f is the mass flux across the interface (SI unit: $\text{kg}/(\text{m}^2\text{s})$).

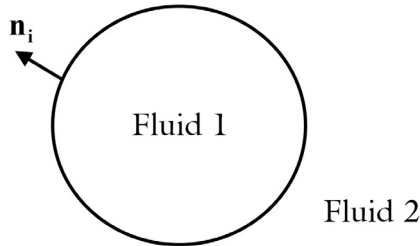


Figure 5-2: Definition of fluid 1 and fluid 2 and the interface normal.

The tangential components of Equation 5-19 enforce a no-slip condition between the fluids at the boundary. In the absence of mass transfer across the boundary, Equation 5-19 and Equation 5-21 ensure that the fluid velocity normal to the boundary is equal to the velocity of the interface. When mass transfer occurs these equations result from conservation of mass and are easily derived in the frame where the boundary is stationary.

The components of the total stress tensor, τ_{uv} , represent the u^{th} component of the force per unit area perpendicular to the v direction. $\mathbf{n} \cdot \boldsymbol{\tau} = \mathbf{n}_v \tau_{uv}$ (using the summation convention) is therefore interpreted as the force per unit area acting on the boundary - in general this is not normal to the boundary. Equation 5-20 therefore expresses the force balance on the interface between the two fluids.



Two boundary conditions (Equation 5-19 and Equation 5-20) are necessary to couple the two domains as there are two separate sets of Navier-Stokes equations, one set for each of the domains.

The force due to the surface tension is given by the following expression:

$$\mathbf{f}_{st} = \sigma(\nabla_s \cdot \mathbf{n}_i) \mathbf{n}_i - \nabla_s \sigma \quad (5-22)$$

where ∇_s is the surface gradient operator ($\nabla_s = (\mathbf{I} - \mathbf{n}_i \mathbf{n}_i^T) \nabla$ where \mathbf{I} is the identity matrix) and σ is the surface tension at the interface.

In the two dimensional case it is straightforward to see the physical origin of Equation 5-22. Consider an element of the surface of unit depth into the page as shown in Figure 5-3. The normal force per unit area \mathbf{F}_n on the element in the limit $\delta s \rightarrow 0$ is:

$$\mathbf{F}_n \delta s = (\sigma + \delta\sigma) \sin(\delta\theta) \rightarrow \sigma \delta\theta$$

Because $R\delta\theta \rightarrow \delta s$ in the limit,

$$\mathbf{F}_n = \frac{\sigma}{R}$$

The quantity $\nabla_s \cdot \mathbf{n}_i$ in the first term on the right-hand side of Equation 5-22 is related to the mean curvature, κ , of the surface by the equation $\kappa = -\nabla_s \cdot \mathbf{n}_i$. In two dimensions the mean curvature $\kappa = -1/R$ so $\nabla_s \cdot \mathbf{n}_i = 1/R$. The first term in Equation 5-22 is therefore the normal force per unit area acting on the boundary due to the surface tension.

The tangential force per unit area, \mathbf{F}_t , acting on the interface in [Figure 5-3](#) can be obtained from the force balance along the direction of δs in the limit $\delta s \rightarrow 0$:

$$\mathbf{F}_t \delta s = (\sigma + \delta\sigma) \cos(\delta\theta) - \sigma \rightarrow (\sigma + \delta\sigma) - \sigma$$

$$\mathbf{F}_t \rightarrow \frac{(\sigma + \delta\sigma) - \sigma}{\delta s}$$

This is equivalent to the second term on the right of [Equation 5-22](#).

To obtain additional insight into the boundary condition, it is helpful to re-write [Equation 5-20](#) as

$$\mathbf{n}_i \cdot ((p_1 - p_2)\mathbf{I} - \mu_1(\nabla\mathbf{u}_1 - (\nabla\mathbf{u}_1)^T) + \mu_2(\nabla\mathbf{u}_2 - (\nabla\mathbf{u}_2)^T)) = \sigma(\nabla_s \cdot \mathbf{n}_i)\mathbf{n}_i - \nabla_s \sigma$$

assuming Newtonian fluids with viscosities μ_1 and μ_2 for fluids 1 and 2, respectively, and that p_1 and p_2 are the pressures in the respective fluids adjacent to the boundary. This equation expresses the equality of two vector quantities. It is instructive to consider the components perpendicular and tangential to the boundary. In the direction of the boundary normal

$$p_1 - p_2 + \mathbf{n}_i \cdot (\mu_2(\nabla\mathbf{u}_2 - (\nabla\mathbf{u}_2)^T) - \mu_1(\nabla\mathbf{u}_1 - (\nabla\mathbf{u}_1)^T)) \cdot \mathbf{n}_i = \sigma(\nabla_s \cdot \mathbf{n}_i)\mathbf{n}_i \quad (5-23)$$

whereas in the tangential direction, \mathbf{t}_i ,

$$\mathbf{n}_i \cdot (\mu_2(\nabla\mathbf{u}_2 - (\nabla\mathbf{u}_2)^T) - \mu_1(\nabla\mathbf{u}_1 - (\nabla\mathbf{u}_1)^T)) \cdot \mathbf{t}_i = |\nabla_s \sigma| \quad (5-24)$$

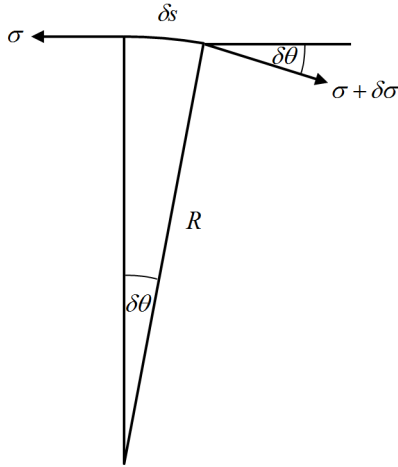


Figure 5-3: Diagrammatic representation of the forces acting on an element of a two-dimensional curved surface.

For the case of a static interface, Equation 5-23 expresses the pressure difference across the interface that results from its curvature. For a moving interface, the surface tension balances the difference in the total normal stress on either side of the interface.

Equation 5-24 involves only velocity gradients and the gradient of the surface tension. The implication of this is that surface tension gradients always drive motion; this is known as the *Marangoni effect*.

EXTERNAL FLUID INTERFACE

It is often the case that the viscosity of fluid 1 is significantly greater than that of fluid 2 (for example for a liquid-vapor interface). In this case, the viscosity terms in the total stress from fluid 2 can be neglected and Equation 5-20 becomes:

$$\mathbf{n}_i \cdot \boldsymbol{\tau}_1 = -p_{\text{ext}} \mathbf{n}_i + \mathbf{f}_{st} \quad (5-25)$$

The outer fluid (fluid 2) now enters the equation system only through the pressure term and the system can be represented by a domain consisting solely of the fluid 1 domain with an expression (or constant value) for the external pressure, p_{ext} , in the fluid 2 domain. Since the velocity in fluid 2 does not affect fluid 1, fluid 2 does not need to be explicitly modeled and Equation 5-19 can be dropped.

Wall-Fluid Interface Boundary Conditions

At a three-phase boundary, it is necessary to add force terms on the boundary to ensure that the fluid maintains a consistent contact angle. Additionally the [Wall](#) boundary condition with the [Navier Slip](#) option must be used on the walls. The forces acting on the contact point are applied to the model by the [Wall-Fluid Interface](#) node.

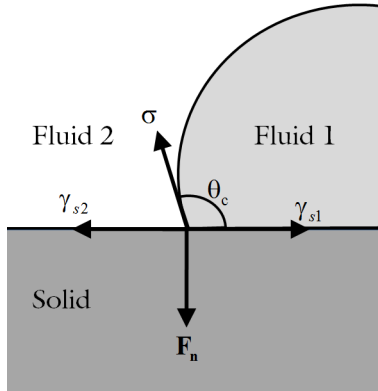


Figure 5-4: Forces per unit length acting on a fluid-fluid interface at a three phase boundary with a solid wall. The surface tension force per unit length, σ , is balanced by a reaction force per unit length at the surface, F_n , and by the forces generated by the surface energies of the two phases at the interface: γ_{s1} and γ_{s2} .

In equilibrium, the surface tension forces and the normal restoring force from the surface are in balance at a constant contact angle (θ_c), as shown in [Figure 5-4](#). This equilibrium is expressed by Young's equation, which considers the components of the forces in the plane of the surface:

$$\sigma \cos(\theta_c) + \gamma_{s1} = \gamma_{s2} \quad (5-26)$$

where σ is the surface tension force between the two fluids, γ_{s1} is the surface energy density on the fluid 1 — solid interface and γ_{s2} is the surface energy density on the fluid 2 — solid interface.

There is still debate in the literature as to precisely what occurs in non-equilibrium situations (for example, drop impact) when the physical contact angle deviates from the contact angle specified by a simple application of Young's equation. A simple approach is to assume that the unbalanced part of the in plane Young Force acts on the fluid to move the contact angle towards its equilibrium value ([Ref. 2](#)). COMSOL

Multiphysics employs this approach as it is physically motivated and is consistent with the allowed form of the boundary condition from thermodynamics (Ref. 3, Ref. 4).

The normal force balance at the solid surface is handled by the wall boundary condition, which automatically prevents fluid flow across the solid boundary by the application of a constraint force. The wall-fluid interface feature applies a force on the fluid at the interface, \mathbf{f}_{wf} , with magnitude:

$$\mathbf{f}_{wf} = \sigma(\cos(\theta_c) - \cos(\theta))\mathbf{m}_s$$

where θ is the actual contact angle and \mathbf{m}_s is the binormal to the solid surface, as defined in Figure 5-5.

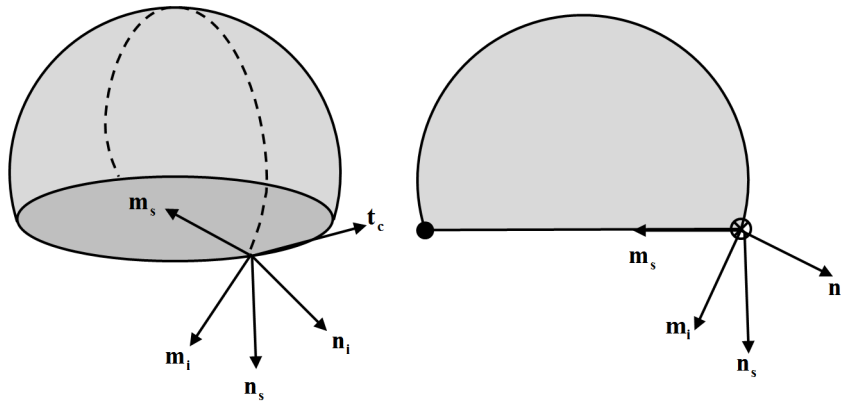



Figure 5-5: Diagram showing normal and tangential vectors defined on the interface between two fluids and a solid surface in 3D (left) and 2D (right). The following vectors are defined: \mathbf{n}_i , the fluid-fluid interface unit normal; \mathbf{n}_s , the solid surface unit normal; \mathbf{t}_c , the tangent to the three-phase contact line; and \mathbf{m}_i and \mathbf{m}_s , the two unit binormals, which are defined as $\mathbf{m}_i = \mathbf{t}_c \times \mathbf{n}_i$ and $\mathbf{m}_s = \mathbf{t}_c \times \mathbf{n}_s$, respectively.

References for the Two-Phase Flow, Moving Mesh Interface

1. R. Scardovell and S. Zalesk, “Direct Numerical Simulation of Free Surface and Interfacial Flow,” *Annu. Rev. Fluid Mech.*, vol. 31, pp. 567–60, 1999.
2. J. Gerbeau and T. Lelievre, “Generalized Navier Boundary Condition and Geometric Conservation Law for Surface Tension,” *Computer Methods In Applied Mechanics and Engineering*, vol. 198, pp. 644–656, 2009.



3. W. Ren and E. Weinan, “Boundary Conditions for the Moving Contact Line Problem”, *Physics of Fluids*, vol. 19, p. 022101, 2007.
4. W. Ren and D. Hu, “Continuum Models for the Contact Line Problem”, *Physics of Fluids*, vol. 22, p. 102103, 2010.

Mathematics, Moving Interfaces

The Level Set and Phase Field Moving Interfaces are available under the **Mathematics>Moving Interface** branch () when adding interfaces. See [Modeling Microfluidic Fluid Flows](#) to help you select which interface to use.

- [The Level Set Interface](#)
- [The Phase Field Interface](#)
- [The Ternary Phase Field Interface](#)
- [Theory for the Level Set Interface](#)
- [Theory for the Phase Field Interface](#)
- [Theory for the Ternary Phase Field Interface](#)

The Level Set Interface

The **Level Set (Is)** interface (), found under the **Mathematics>Moving Interface** branch () when adding an interface, is used to track moving interfaces in fluid-flow models by solving a transport equation for the level set function. Simulations using the **Level Set** interface are always time dependent since the position of an interface almost always depends on its history.

The main node is the **Level Set Model** feature, which adds the level set equation and provides an interface for defining the level set properties and the velocity field.

When this physics interface is added, the following default nodes are also added in the **Model Builder** — **Level Set Model, No Flow** (the default boundary condition) and **Initial Values**. Then, from the **Physics** toolbar, add other nodes that implement, for example, boundary conditions. You can also right-click **Level Set** to select physics features from the context menu.


SETTINGS

The **Label** is the default physics interface name.

The **Name** is used primarily as a scope prefix for variables defined by the physics interface. Refer to such physics interface variables in expressions using the pattern `<name>.<variable_name>`. In order to distinguish between variables belonging to different physics interfaces, the `name` string must be unique. Only letters, numbers, and underscores (`_`) are permitted in the **Name** field. The first character must be a letter.


The default **Name** (for the first physics interface in the model) is `ls`.

STABILIZATION

To display this sections, click the **Show More Options** button () and select **Stabilization** in the **Show More Options** dialog box.

There are two stabilization methods available — **Streamline diffusion** and **Crosswind diffusion**. Both are active by default and should remain selected for optimal performance.

ADVANCED SETTINGS

To display this sections, click the **Show More Options** button () and select **Advanced Physics Options** in the **Show More Options** dialog box.

Specify the **Convective term** as **Nonconservative form** (default) or **Conservative form**.

DISCRETIZATION

By default, the Level Set interface uses **Linear** elements. When coupling the physics interface to a fluid flow interface by means of [The Two-Phase Flow, Level Set Coupling Feature](#), exact conservation of the integral of ϕ is obtained using the nonconservative form provided that the discretization order of the level set variable is equal to or lower than the order of the pressure.

DEPENDENT VARIABLES

The dependent variable (field variable) is the **Level set variable** phi. The name can be changed but the names of fields and dependent variables must be unique within a model.



- [Conservative and Nonconservative Form](#)
 - [Domain, Boundary, and Pair Nodes for the Level Set Interface](#)
 - [Theory for the Level Set Interface](#)
 - [Theory for the Level Set and Phase Field Interfaces](#)
-

Domain, Boundary, and Pair Nodes for the Level Set Interface

The **Level Set Interface** has the following domain, boundary and pair nodes described.

- Continuity
- Initial Interface
- Initial Values
- Inlet
- Level Set Model
- No Flow
- Outlet¹
- Periodic Condition (see [Periodic Boundary Conditions](#) in the *COMSOL Multiphysics Reference Manual*)
- Symmetry¹
- Thin Barrier

¹ Described for the Laminar Flow interface.



Boundary conditions for axial symmetry boundaries are not required. For the symmetry axis at $r = 0$, the software automatically provides a suitable boundary condition and adds an **Axial Symmetry** node that is valid on the axial symmetry boundaries only.



In the *COMSOL Multiphysics Reference Manual* see [Table 2-4](#) for links to common sections and [Table 2-5](#) to common feature nodes. You can also search for information: press F1 to open the **Help** window or Ctrl+F1 to open the **Documentation** window.

Level Set Model

The **Level Set Model** node adds the following transport equation governing a level set function ϕ

$$\frac{\partial \phi}{\partial t} + \mathbf{u} \cdot \nabla \phi = \gamma \nabla \cdot \left(\epsilon \nabla \phi - \phi(1 - \phi) \frac{\nabla \phi}{|\nabla \phi|} \right)$$

and provides the options to define the associated level set parameters and the velocity field.

LEVEL SET PARAMETERS

Enter a value or expression for the **Reinitialization parameter** γ (SI unit: m/s). The default is 1 m/s.

Enter a value or expression for the **Parameter controlling interface thickness** e_{IS} (SI unit: m). The default expression is $1s \cdot h_{max}/2$, which means that the value is half of the maximum mesh element size in the region through which the interface passes.

CONVECTION

Enter values or expressions for the components (u , v , and w in 3D, for example) of the **Velocity field \mathbf{u}** (SI unit: m/s). The applied velocity field transports the level set function through convection.

Initial Values

Use the **Initial Values** node to define the initial values of the level set variable.


INITIAL VALUES

The initial positions of the two fluids, and consequently the separating interface, can be specified in two ways. The level set function can be specified explicitly, using any type of variable or expression. Alternatively the fluid occupying the current domain selection can be specified. Using the former method, a Time Dependent study step can directly be solved. Using the latter method, a Phase Initialization study step is needed in order to initialize the level set function across the fluid-fluid interface.

Specify the **Level set variable** as one of the following:

- To specify the fluid occupying the domain, select **Specify phase** (default). Then select the check box **Fluid 1** ($\phi = 0$) or **Fluid 2** ($\phi = 1$).
- For **User defined** enter a value or expression for the level set variable ϕ .



If the **Phase Initialization** () study step is being used, for the initialization to work it is crucial that there are two Initial Values nodes and one Initial Interface node. The Initial Values nodes should specify the **Level set variable** as **Specify phase: Fluid 1** and **Specify phase: Fluid 2** respectively. The **Initial Interface** node should include all interior boundaries that define the initial position of the fluid-fluid interface. If the selection of the **Initial interface** node is empty, the initialization fails.

See [Initializing the Level Set Function](#).

Inlet

SETTINGS

Specify **Level Set Condition** according to one of the following options:


- **Fluid 1** ($\phi = 0$)
- **Fluid 2** ($\phi = 1$)
- **Specify level set function explicitly**

When the **Specify level set function explicitly** is selected, the level set function ϕ must be specified in the entire domain. The value must be in the range from 0 to 1, where the default is 0.

Initial Interface

The **Initial Interface** node defines the boundary as the initial position of the interface $\phi = 0$.



If the **Transient with Initialization** () study is being used, for the initialization to work it is crucial that there are two Initial Values nodes and one Initial Interface node. One of the Initial Values nodes should use **Specify phase: Fluid 1** and the other **Specify phase: Fluid 2**. The Initial Interface node should have all interior boundaries where the interface is initially present as selection. If the selection of the **Initial interface** node is empty, the initialization fails.

See [Initializing the Level Set Function](#).

A version of the **Initial Interface** suitable for pairs where the boundaries match is also available. It combines the initial interface feature with the **Continuity** feature, which prescribes that the level set variable is continuous across the pair. To add the pair version of the initial interface feature, right click the physics interface and select **Pairs>Initial Interface**.

No Flow

The **No Flow** node adds a boundary condition that represents boundaries where there is no flow across the boundary. This is the default boundary condition.

Thin Barrier

The **Thin Barrier** feature is available on interior boundaries and introduces a discontinuity in the level set variable across the boundary. A **No Flow** condition is prescribed on each side. This node can be used to avoid meshing thin structures.

Continuity

The **Continuity** condition is suitable for pairs where the boundaries match; it prescribes that the level set variable is continuous across the pair.

A **No Flow** subnode is added by default and it applies to the parts of the pair boundaries where a source boundary lacks a corresponding destination boundary and vice versa. The **No Flow** feature can be overridden by any other boundary condition that applies to exterior boundaries. By right-clicking the **Continuity** node, additional Fallback feature subnodes can be added.

LOCATION IN USER INTERFACE



Right click the physics interface and select **Pairs>Continuity**

Ribbon

Physics tab with the physics interface selected:

Pairs>Continuity

The Phase Field Interface

The **Phase Field (pf)** interface () , found under the **Mathematics>Moving Interface** branch () when adding a physics interface, is used to track moving interfaces by solving two transport equations, one for the phase field variable, ϕ , and one for the mixing energy density, ψ . The position of the interface is determined by minimizing the free energy.

The main node is the **Phase Field Model** feature, which adds the phase field equations and provides an interface for defining the phase field model properties.

When this physics interface is added, the following default nodes are also added in the **Model Builder — Phase Field Model, Wetted Wall** (the default boundary condition) and **Initial Values**. Then, from the **Physics** toolbar, add other nodes that implement, for example, boundary conditions. You can also right-click **Phase Field** to select physics features from the context menu.


SETTINGS

The **Label** is the default physics interface name.

The **Name** is used primarily as a scope prefix for variables defined by the physics interface. Refer to such physics interface variables in expressions using the pattern `<name>.<variable_name>`. In order to distinguish between variables belonging to different physics interfaces, the `name` string must be unique. Only letters, numbers, and underscores (`_`) are permitted in the **Name** field. The first character must be a letter.

The default **Name** (for the first physics interface in the model) is `pf`.

ADVANCED SETTINGS

To display this sections, click the **Show More Options** button () and select **Advanced settings options** in the **Show More Options** dialog box.

Specify the **Convective term** as **Nonconservative form** (default) or **Conservative form**.

DISCRETIZATION

By default, the Phase Field interface uses **Linear** elements.

DEPENDENT VARIABLES

This interface defines the dependent variables (fields) **Phase field variable** ϕ and **Phase field help variable** ψ . If required, edit the name, but dependent variables must be unique within a model.



- [Conservative and Nonconservative Forms](#)
- [Domain, Boundary, and Pair Nodes for the Phase Field Interface](#)
- [Theory for the Phase Field Interface](#)

Domain, Boundary, and Pair Nodes for the Phase Field Interface

The [Phase Field Interface](#) includes the following domain, boundary, and pair nodes, listed in alphabetical order, available from the **Physics** ribbon toolbar (Windows users), **Physics** context menu (Mac or Linux users), or right-click to access the context menu (all users).



In general, to add a node, go to the **Physics** toolbar, no matter what operating system you are using. Subnodes are available by clicking the parent node and selecting it from the **Attributes** menu.

- [Continuity](#)
- [Initial Interface](#)
- [Initial Values](#)
- [Inlet](#)
- [Interior Wetted Wall](#)
- [Outlet](#)¹
- [Periodic Condition](#) (see [Periodic Boundary Conditions](#) in the *COMSOL Multiphysics Reference Manual*)
- [Phase Field Model](#)
- [Symmetry](#)¹
- [Wetted Wall](#)

¹ Described for the Laminar Flow interface.



In the *COMSOL Multiphysics Reference Manual* see [Table 2-4](#) for links to common sections and [Table 2-5](#) to common feature nodes. You can also search for information: press F1 to open the **Help** window or Ctrl+F1 to open the **Documentation** window.

Phase Field Model

The **Phase Field Model** node adds the equations described in [The Equations for the Phase Field Method](#). The node defines the associated phase field parameters including surface tension and interface thickness.

PHASE FIELD PARAMETERS

Define the following phase field parameters. Enter a value or expression for the:

- **Surface tension coefficient** σ (SI unit: N/m).
- **Parameter controlling interface thickness** e_{pf} (SI unit: m). The default expression is $\text{pf.hmax}/2$, which means that the value is half of the maximum mesh element size in the region through which the interface passes.
- **Mobility tuning parameter** χ (SI unit: m·s/kg). This parameter determines the time scale of the Cahn-Hilliard diffusion and it thereby also governs the diffusion-related time scale for the interface. Select **User defined** (default) or **Calculate from velocity**. For **User defined** enter a value or expression for the mobility tuning parameter χ . The default is 1 m·s/kg, which is a good starting point for most models.

For **Calculate from velocity** enter a value for the expected velocity at the interface U (SI unit: m/s). χ is then computed as:

$$\chi = \frac{U h_{\text{max}}}{3\sqrt{2}\sigma\epsilon}$$

where h_{max} is the largest mesh cell size.



Keep the χ parameter value large enough to maintain a constant interface thickness but still low enough to not damp the convective motion. A too high mobility can also lead to excessive diffusion of droplets.

EXTERNAL FREE ENERGY

Add a source of external free energy to the phase field equations. This modifies the last term on the right-hand side of the equation:

$$\psi = -\nabla \cdot \epsilon^2 \nabla \phi + (\phi^2 - 1)\phi + \left(\frac{\epsilon^2}{\lambda}\right) \frac{\partial f}{\partial \phi}$$

The external free energy f (SI unit: J/m³) is a user-defined free energy. In most cases, the external free energy can be set to zero. Manually differentiate the expression for

the external free energy with respect to ϕ and then enter it into the ϕ -**derivative of external free energy** field $\partial f/\partial\phi$.

CONVECTION

Enter values or expressions for the components (u , v , and w in 3D, for example) of the **Velocity field u** (SI unit: m/s). The applied velocity field transports the phase field variables through convection.



Additional Sources of Free Energy

Initial Values

Use the **Initial Values** node to define the initial values of the phase field variable.


INITIAL VALUES

The initial positions of the two fluids, and consequently the fluid-fluid interface, can be specified in two ways. The phase field variable can be specified explicitly, using any type of variable or expression. Alternatively the fluid occupying the current domain selection can be specified. Using the former method, a Time Dependent study step can directly be solved. Using the latter method, a Phase Initialization study step is needed in order to initialize the phase field function across the fluid-fluid interface.

Specify the **Phase field variable** as one of the following:

- To specify the fluid occupying the domain, select **Specify phase** (default). Then select the check box **Fluid 1** ($\phi = -1$) or **Fluid 2** ($\phi = 1$).
- For **User defined** enter a value or expression for the phase field variable ϕ .



If the **Phase Initialization** () study step is being used, for the initialization to work it is crucial that there are two Initial Values nodes and one Initial Interface node. The Initial Values nodes should specify the **Phase field variable** as **Specify phase: Fluid 1** and **Specify phase: Fluid 2** respectively. The Initial Interface node should include all interior boundaries that defines the initial position of the fluid-fluid interface. If the selection of the **Initial interface** node is empty, the initialization will fail.

Inlet

SETTINGS

Specify **Phase field Condition** according to one of the following options:


- **Fluid 1** ($\phi = -1$)
- **Fluid 2** ($\phi = 1$)
- **Specify phase field function explicitly**

When **Specify phase field function explicitly** is selected, the phase field function ϕ must be specified in the entire domain. The value must be in the range from -1 to 1, where the default is 1.

Initial Interface

The **Initial Interface** node defines the boundary as the initial position of the interface $\phi = 0$.



If the **Transient with Phase Initialization** () study is being used, for the initialization to work it is crucial that there are two **Initial Values** nodes and one **Initial Interface** node. One of the Initial Values nodes is set to **Specify phase: Fluid 1** and the other to **Specify phase: Fluid 2**. The Initial Interface node should have all interior boundaries where the interface is initially present as selection. If the selection of the Initial Interface node is empty, the initialization fails.

A version of the **Initial Interface** suitable for pairs where the boundaries match is also available. It combines the initial interface feature with the **Continuity** feature, which prescribes that the phase field variables are continuous across the pair. To add the pair version of the initial interface feature, right click the physics interface and select **Pairs>Initial Interface**.

Wetted Wall

The **Wetted Wall** node is the default boundary condition representing wetted walls. Along a wetted wall the contact angle for the fluid, θ_w , is specified, and across it, the mass flow is zero. This is prescribed by

$$\mathbf{n} \cdot \varepsilon^2 \nabla \phi = \varepsilon^2 \cos(\theta_w) |\nabla \phi|$$

in combination with

$$\mathbf{n} \cdot \frac{\gamma_\lambda}{\varepsilon^2} \nabla \psi = 0$$

The contact angle θ_w can be defined directly or from Young's equation, which considers the components of the forces in the plane of the surface:

$$\sigma \cos(\theta_w) + \gamma_{s2} = \gamma_{s1} \quad (6-1)$$

where γ_{s1} is the surface energy density on the fluid 1 — solid (wall) interface and γ_{s2} is the surface energy density on the fluid 2 — solid (wall) interface.

WETTED WALL

Select an option from the **Specify contact angle list** — **Directly** (the default) or **Through Young's equation**. For **Directly** enter a value or expression for the **Contact angle** θ_w (SI unit: rad). The default value is $\pi/2$ radians. For **Through Young's equation** enter values or expressions for **Phase 1-Solid surface energy density** γ_{s1} (SI unit: J/m²) and **Phase 2-Solid surface energy density** γ_{s2} (SI unit: J/m²).

Interior Wetted Wall

The **Interior Wetted Wall** feature is available on interior boundaries. It is similar to the [Wetted Wall](#) condition except that it applies on both sides of an interior boundary and introduces a discontinuity of the phase field variables across the boundary. This node can be used to avoid meshing thin structures.

Along an interior wetted wall the contact angle for the fluid, θ_w , is specified on both sides of the boundary, and across it, the mass flow is zero.

WETTED WALL

Enter a value or expression for the **Contact angle** θ_w . The default value is $\pi/2$ rad.

Continuity

The **Continuity** condition is suitable for pairs where the boundaries match; it prescribes that the phase field variables are continuous across the pair.

A **Wetted Wall** subnode is added by default and it applies to the parts of the pair boundaries where a source boundary lacks a corresponding destination boundary and vice versa. The **Wetted Wall** feature can be overridden by any other boundary condition that applies to exterior boundaries. By right-clicking the **Continuity** node, additional Fallback feature subnodes can be added.

LOCATION IN USER INTERFACE



Right click the physics interface and select **Pairs>Continuity**.

Ribbon

Physics tab with the physics interface selected:

Pairs>Continuity

The Ternary Phase Field Interface

The **Ternary Phase Field (terpf)** interface (), found under the **Mathematics>Moving Interface** branch () when adding a physics interface, is used to track moving interfaces separating three different phases. The interface solves four transport equations: two equations governing phase field variables, ϕ_A and ϕ_B , and two equations for the corresponding generalized chemical potentials, η_A and η_B . The position of the interfaces are determined by minimization of the free energy.

The phase field variables are defined such that they represent the volume fraction of the respective phase. The volume fraction of the third phase not solved for, but computed from the natural constraint that the sum of the volume fractions of all phases is one.

The main node of the interface is the [Phase Field Model](#) feature, which adds the phase field equations and provides an interface for defining the phase field model properties such as surface tensions and parameters controlling the interface thickness.

When this physics interface is added, the following default nodes are also added in the **Model Builder — Mixture Properties, Wetted Wall** and **Initial Values**. Then, from the **Physics** toolbar, add other nodes that implement, for example, boundary conditions. You can also right-click **Ternary Phase Field** to select physics features from the context menu.

SETTINGS

The **Label** is the default physics interface name.

The **Name** is used primarily as a scope prefix for variables defined by the physics interface. Refer to such physics interface variables in expressions using the pattern `<name>.<variable_name>`. In order to distinguish between variables belonging to different physics interfaces, the `name` string must be unique. Only letters, numbers, and underscores (`_`) are permitted in the **Name** field. The first character must be a letter.

The default **Name** (for the first physics interface in the model) is `terpf`.

DEPENDENT VARIABLES

This interface defines the dependent variables (fields):

- **Phase field variable, fluid A** `phiA`
- **Phase field variable, fluid B** `phiB`

- **Generalized chemical potential of fluid A** ϵ_{tA}
- **Generalized chemical potential of fluid B** ϵ_{tB}

If required, edit the any of the names, but dependent variables must be unique within a model.



Theory for the Ternary Phase Field Interface

Domain, Boundary, and Pair Nodes for the Ternary Phase Field Interface

The **Ternary Phase Field Interface** includes the following domain, boundary, and pair nodes, listed in alphabetical order, available from the **Physics** ribbon toolbar (Windows users), **Physics** context menu (Mac or Linux users), or by right-clicking the interface node to access the context menu (all users).

- [Initial Values](#)
- [Inlet](#)
- [Outlet](#)
- [Phase Field Model](#)
- [Symmetry](#)
- [Wetted Wall](#)

Mixture Properties

The **Mixture Properties** node adds the equations described in [The Equations of the Ternary Phase Field Method](#). The node defines the associated phase field parameters, including the surface tension coefficients and parameters controlling the thickness of the interfaces.

MODEL INPUTS

The surface tension coefficients can be defined through user inputs, variables, or by selecting a material. For the latter option, an additional input, the temperature, may be required to define these properties.

Temperature

By default, the **Temperature** model input is set to **Common model input**, and the temperature is controlled from [Default Model Inputs](#) under **Global Definitions** or by a locally defined [Model Input](#). If a Heat Transfer interface is included in the component,

it controls the temperature **Common model input**. Alternatively, the temperature field can be selected from another physics interface. All physics interfaces have their own tags (**Name**). For example, if a Heat Transfer in Fluids interface is included in the component, the **Temperature (ht)** option is available for T .

You can also select **User defined** from the **Temperature** model input in order to manually prescribe T



Model Inputs and Multiphysics Couplings in the *COMSOL Multiphysics Reference Manual*

PHASE FIELD PARAMETERS

Define the following phase field parameters. Enter a value or expression for the:

- **Parameter controlling interface thickness ϵ** . The default expression applied is `terpf.hmax*sqrt(2)`, which means that the thickness is related to the maximum mesh element size in the domain. If the element size in the regions passed by the interfaces is known beforehand, it is recommended to apply a value of ϵ in that order.
- **Mobility tuning parameter M_0** . This parameter determines the time scale of the Cahn-Hilliard diffusion and it thereby also governs the diffusion-related time scale for the interface. Keep the mobility tuning parameter value large enough to maintain a constant interface thickness but still low enough to not damp the convective motion. A too high mobility can also lead to excessive diffusion of droplets. By default, M_0 is set to $1 \cdot 10^{-4} \text{ m}^3/\text{s}$, which is a good starting point for most models.
- **Additional free bulk energy Λ** . When needed, add a user-defined expression for the additional bulk energy.

SURFACE TENSION

Specify the surface tension coefficients for the three types of interfaces present.

- To use a predefined expression, select **Library coefficient, liquid/gas interface** or **Library coefficient, liquid/liquid interface**. Then select an option from the list that displays below (**Water/Air**, **Glycerol/Air**, and so forth).
- For **User defined**, enter a value or expression for the surface tension coefficient.

CONVECTION

Enter values or expressions for the components (u , v , and w in 3D, for example) of the **Velocity field** u . The applied velocity field transports the phase field variables through convection.

Initial Values

The **Initial Values** node adds initial values for the phase field variables that can serve as initial conditions for a transient simulation.

INITIAL VALUES

Enter initial values or expressions for **Phase field variable A** and the **Phase field variable B** corresponding to the mass fraction of the respective phase. The value must be in the range from 0 to 1.

Inlet

This condition should be used on boundaries for which there is a net convective flow of the phases into the adjacent domain.

INLET

Specify phase field variables, corresponding to the volume fractions, of phase A and phase B . The value must be in the range from 0 to 1. The volume fraction of phase C will be evaluated such that the sum of all mass fractions equals one.

Mathematically this boundary condition imposes

$$\phi_i = \phi_{i,0}, \mathbf{n} \cdot \frac{M_0}{\Sigma_i} \nabla \eta_i = 0$$

for phases $i = A$ and B .

Outlet

This condition should be used on boundaries for which there is a net convective outflow from the domain.

Mathematically this boundary condition imposes

$$\mathbf{n} \cdot \frac{M_0}{\Sigma_i} \nabla \eta_i = 0$$

for phases $i = A$ and B .

Symmetry

Use this condition on boundaries that represent a geometrical symmetry line across which the flow of the fluid phases is zero.

Mathematically this boundary condition imposes

$$\mathbf{n} \cdot \frac{M_0}{\Sigma_i} \nabla \eta_i = 0$$

for phases $i = A$ and B .

Wetted Wall

Use this node to represent a solid wall along which the contact angles between the separating interfaces and the wall should be prescribed.

WETTED WALL

Enter values or expressions for the contact angles for the three interfaces types:

- The **Contact angle of interface from phase A to phase C** θ_α .
- The **Contact angle of interface from phase B to phase C** θ_β .
- The **Contact angle of interface from phase A to phase B** θ_γ .

The definition of the contact angles with respect to the wall are shown in the figure below.

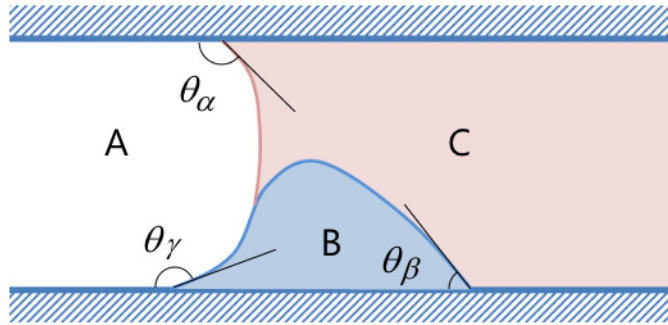


Figure 6-1: Definitions of the contact angles in the Wetted Wall feature of the Ternary Phase Field interface.

Theory for the Level Set Interface

Fluid flow with moving interfaces or boundaries occur in a number of different applications, such as *fluid-structure interaction*, multiphase flows, and flexible membranes moving in a liquid. One way to track moving interfaces is to use a level set method. A certain contour line of the globally defined function, the level set function, then represents the interface between the phases. For [The Level Set Interface](#) the fluid-fluid interface can be advected with an arbitrary velocity field.

In this section:

- [The Level Set Method](#)
- [Conservative and Nonconservative Form](#)
- [Initializing the Level Set Function](#)
- [Variables For Geometric Properties of the Interface](#)
- [Reference for the Level Set Interface](#)

The Level Set Method

The *level set method* is a technique to represent moving interfaces or boundaries using a fixed mesh. It is useful for problems where the computational domain can be divided into two domains separated by an interface. Each of the two domains can consist of several parts. [Figure 6-2](#) shows an example where one of the domains consists of two separated parts. The interface is represented by a certain level set or isocontour of a globally defined function, the level set function ϕ . In COMSOL Multiphysics, ϕ is a smooth step function that equals zero (0) in one domain and one (1) in the other. Across the interface, there is a smooth transition from zero to one. The interface is

defined by the 0.5 isocontour, or level set, of ϕ . Figure 6-3 shows the level set representation of the interface in Figure 6-2.

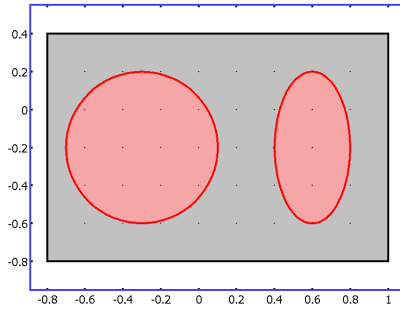


Figure 6-2: An example of two domains divided by an interface. In this case, one of the domains consists of two parts. Figure 6-3 shows the corresponding level set representation.

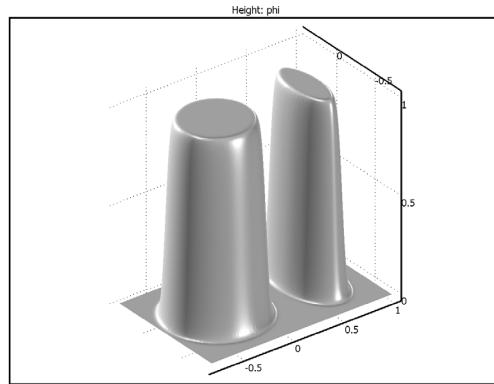


Figure 6-3: A surface plot of the level set function corresponding to Figure 6-2.

The physics interface solves Equation 6-2 in order to move the interface with the velocity field \mathbf{u} :

$$\frac{\partial \phi}{\partial t} + \mathbf{u} \cdot \nabla \phi = \gamma \nabla \cdot \left(\varepsilon \nabla \phi - \phi(1-\phi) \frac{\nabla \phi}{|\nabla \phi|} \right) \quad (6-2)$$

The terms on the left-hand side give the correct motion of the interface, while those on the right-hand side are necessary for numerical stability. The parameter, ε , determines the thickness of the region where ϕ varies smoothly from zero to one and is typically of the same order as the size of the elements of the mesh. By default, ε is

constant within each domain and equals the largest value of the mesh size, h , within the domain. The parameter γ determines the amount of reinitialization or stabilization of the level set function. It needs to be tuned for each specific problem. If γ is too small, the thickness of the interface might not remain constant and oscillations in ϕ can appear because of numerical instabilities. On the other hand, if γ is too large the interface moves incorrectly. A suitable value for γ is the maximum magnitude of the velocity field \mathbf{u} .

Conservative and Nonconservative Form

If the velocity is divergence free, that is, if

$$\nabla \cdot \mathbf{u} = 0 \quad (6-3)$$

the volume (area for 2D problems) bounded by the interface should be conserved if there is no inflow or outflow through the boundaries. To obtain exact numerical conservation in cases where Equation 6-3 is not fully satisfied, switch to the conservative form

$$\frac{\partial \phi}{\partial t} + \nabla \cdot (\mathbf{u}\phi) = \gamma \nabla \cdot \left(\epsilon \nabla \phi - \phi(1 - \phi) \frac{\nabla \phi}{|\nabla \phi|} \right) \quad (6-4)$$

in Settings window for [The Level Set Interface](#).

Using the conservative level set form, exact numerical conservation of the integral of ϕ is obtained. However, the nonconservative form is better suited for numerical calculations and usually converges more easily. The nonconservative form, which is the default form, only conserves the integral of the level set function approximately, but this is sufficient for most applications.

When the Level Set interface is coupled to a fluid flow interface by means of [The Two-Phase Flow, Level Set Coupling Feature](#), exact conservation of the integral of ϕ is obtained using the nonconservative form provided that the discretization order of the level set variable is equal to or lower than the order of the pressure.



Rising Bubble: path `CFD_Module/Multiphase_Tutorials/rising_bubble_2daxi`

Initializing the Level Set Function

If the study type Transient with Phase Initialization is used in the model, the level set variable is first initialized so that it varies smoothly between zero and one over the interface. For that study, two study steps are created, Phase Initialization and Time Dependent. The Phase Initialization step solves for the distance to the initial interface, D_{wi} . The Time Dependent step then uses the initial condition for the level set function according to the following expression:

$$\phi_0 = \frac{1}{1 + e^{-D_{wi}/\epsilon}}$$

in domains initially outside the interface and

$$\phi_0 = \frac{1}{1 + e^{D_{wi}/\epsilon}}$$

in domains initially inside the interface. Here, inside refers to domains where $\phi < 0.5$ and outside refers to domains where $\phi > 0.5$.



For the initialization to work it is crucial that there are two **Initial Values** nodes and one **Initial Interface** node. One of the Initial Values nodes should use **Specify phase: Fluid 1** ($\phi = 0$) and the other **Specify phase: Fluid 2** ($\phi = 1$). The Initial Interface node should have all interior boundaries where the interface is initially present as selection. If the selection of the Initial interface node is empty, the initialization fails.



- [The Level Set Interface](#)
- [Studies and Solvers and Time Dependent with Initialization](#) in the *COMSOL Multiphysics Reference Manual*

Variables For Geometric Properties of the Interface

Geometric properties of the interface are often needed. The unit normal to the interface is given by

$$\mathbf{n} = \frac{\nabla\phi}{|\nabla\phi|} \Big|_{\phi = 0.5} \quad (6-5)$$

This variable is available in the physics interface as the interface normal `ls.intnorm`.

Reference for the Level Set Interface

I. E. Olsson and G. Kreiss, “A Conservative Level Set Method for Two Phase Flow,” *J. Comput. Phys.*, vol. 210, pp. 225–246, 2005.

Theory for the Phase Field Interface

The [Phase Field Interface](#) theory is described in this section:

- [About the Phase Field Method](#)
- [The Equations for the Phase Field Method](#)
- [Conservative and Nonconservative Forms](#)
- [Additional Sources of Free Energy](#)
- [Initializing the Phase Field Function](#)
- [Variables and Expressions](#)
- [Reference for the Phase Field Interface](#)

About the Phase Field Method

The phase field method offers an attractive alternative to more established methods for solving multiphase flow problems. Instead of directly tracking the interface between two fluids, the interfacial layer is governed by a phase field variable, ϕ . The surface tension force is added to the Navier-Stokes equations as a body force by multiplying the chemical potential of the system by the gradient of the phase field variable.

The evolution of the phase field variable is governed by the *Cahn-Hilliard equation*, which is a 4th-order PDE. The Phase Field interface decomposes the Cahn-Hilliard equation into two second-order PDEs.

For the level set method, the fluid interface is simply advected with the flow field. The Cahn-Hilliard equation, on the other hand, does not only convect the fluid interface, but it also ensures that the total energy of the system diminishes correctly. The phase field method thus includes more physics than the level set method.

The free energy of a system of two immiscible fluids consists of mixing, bulk distortion, and anchoring energy. For simple two-phase flows, only the mixing energy is retained, which results in a rather simple expression for the free energy.

The Equations for the Phase Field Method

The free energy is a functional of a dimensionless phase field parameter, ϕ :

$$F(\phi, \nabla\phi, T) = \int \left(\frac{1}{2} \varepsilon^2 |\nabla\phi|^2 + f(\phi, T) \right) dV = \int f_{\text{tot}} dV$$

where ε is a measure of the interface thickness. Equation 6-6 describes the evolution of the phase field parameter:

$$\frac{\partial\phi}{\partial t} + (\mathbf{u} \cdot \nabla)\phi = \nabla \cdot \gamma \nabla \left(\frac{\partial f_{\text{tot}}}{\partial \phi} - \nabla \cdot \frac{\partial f_{\text{tot}}}{\partial \nabla\phi} \right) \quad (6-6)$$

where f_{tot} (SI unit: J/m³) is the total free energy density of the system, and \mathbf{u} (SI unit: m/s) is the velocity field for the advection. The right-hand side of Equation 6-6 aims to minimize the total free energy with a relaxation time controlled by the mobility γ (SI unit: m³·s/kg).

The free energy density of an isothermal mixture of two immiscible fluids is the sum of the mixing energy and elastic energy. The mixing energy assumes the Ginzburg-Landau form:

$$f_{\text{mix}}(\phi, \nabla\phi) = \frac{1}{2} \lambda |\nabla\phi|^2 + \frac{\lambda}{4\varepsilon^2} (\phi^2 - 1)^2$$

where ϕ is the dimensionless phase field variable, defined such that the volume fraction of the components of the fluid are $(1 + \phi)/2$ and $(1 - \phi)/2$. The quantity λ (SI unit: N) is the mixing energy density and ε (SI unit: m) is a capillary width that scales with the thickness of the interface. These two parameters are related to the surface tension coefficient, σ (SI unit: N/m), through the equation

$$\sigma = \frac{2\sqrt{2}\lambda}{3\varepsilon} \quad (6-7)$$

The PDE governing the phase field variable is the Cahn-Hilliard equation:

$$\frac{\partial\phi}{\partial t} + \mathbf{u} \cdot \nabla\phi = \nabla \cdot \gamma \nabla G \quad (6-8)$$

where G (SI unit: Pa) is the chemical potential and γ (SI unit: m³·s/kg) is the mobility. The mobility determines the time scale of the Cahn-Hilliard diffusion and must be large enough to retain a constant interfacial thickness but small enough so that the convective terms are not overly damped. In COMSOL Multiphysics the mobility is determined by a mobility tuning parameter that is a function of the interface thickness $\gamma = \chi\varepsilon^2$. The chemical potential is:

$$G = \lambda \left[-\nabla^2 \phi + \frac{\phi(\phi^2 - 1)}{\varepsilon^2} \right] \quad (6-9)$$

The Cahn-Hilliard equation forces ϕ to take a value of 1 or -1 except in a very thin region on the fluid-fluid interface. The Phase Field interface breaks [Equation 6-8](#) up into two second-order PDEs:

$$\frac{\partial \phi}{\partial t} + \mathbf{u} \cdot \nabla \phi = \nabla \cdot \frac{\gamma \lambda}{\varepsilon^2} \nabla \psi \quad (6-10)$$

$$\psi = -\nabla \cdot \varepsilon^2 \nabla \phi + (\phi^2 - 1)\phi \quad (6-11)$$

Conservative and Nonconservative Forms

If the velocity field is divergence free, that is, if

$$\nabla \cdot \mathbf{u} = 0 \quad (6-12)$$

the volume (area for 2D problems) bounded by the interface should be conserved if there is no inflow or outflow through the boundaries. To obtain exact numerical conservation in cases where [Equation 6-12](#) is not fully satisfied, switch to the conservative form

$$\frac{\partial \phi}{\partial t} + \nabla \cdot \mathbf{u} \phi = \nabla \cdot \frac{\gamma \lambda}{\varepsilon^2} \nabla \psi$$

Using the conservative phase field form, exact numerical conservation of the integral of ϕ is obtained. However, the nonconservative form is better suited for numerical calculations and usually converges more easily. The nonconservative form, which is the default form, only conserves the integral of the phase field function approximately, but this is sufficient for most applications.

When the Phase Field interface is coupled to a fluid flow interface by means of [The Two-Phase Flow, Phase Field Coupling Feature](#), conservation of the integral of ϕ using the nonconservative form can be improved provided that the discretization order of the phase field variables is equal to or lower than the order of the pressure.

Additional Sources of Free Energy

In some cases, the expression for the free energy can include other sources. It is possible to incorporate these by modifying [Equation 6-11](#):

$$\psi = -\nabla \cdot \epsilon^2 \nabla \phi + (\phi^2 - 1)\phi + \left(\frac{\epsilon^2}{\lambda}\right) \frac{\partial f}{\partial \phi} \quad (6-13)$$

where f is a user-defined free energy (SI unit: J/m³).



The expression for the external free energy must be manually differentiated with respect to ϕ and then entered into the $\partial f/\partial \phi$ field. In most cases, the external free energy is zero.

Initializing the Phase Field Function

If the study type Transient with Phase Initialization is used in the model, the phase field variable is first initialized so that it varies smoothly between zero and one over the interface. For this study, two study steps are created, Phase Initialization and Time Dependent. The Phase Initialization step solves for the distance to the initial interface, D_{wi} . The Time Dependent step then uses the initial condition for the phase field function according to the following expression:


$$\phi_0 = -\tanh\left(\frac{D_{wi}}{\sqrt{2}\epsilon}\right)$$

in Fluid 1 and

$$\phi_0 = \tanh\left(\frac{D_{wi}}{\sqrt{2}\epsilon}\right)$$

in Fluid 2. These expressions are based on a steady, analytic solution to [Equation 6-10](#) and [Equation 6-11](#) for a straight, non-moving interface.



If the **Transient with Phase Initialization** () study is being used, for the initialization to work it is crucial that there are two **Initial Values** nodes and one **Initial Interface** node. One of the Initial Values nodes is set to **Specify phase: Fluid 1** and the other to **Specify phase: Fluid 2**. The Initial Interface node should have all interior boundaries where the interface is initially present as selection. If the selection of the Initial Interface node is empty, the initialization fails.



[Studies and Solvers](#) in the *COMSOL Multiphysics Reference Manual*

Variables and Expressions

Unlike the level set method, the phase field method does not require expressions for the unit normal to the interface or smoothed delta functions, so they are not available for analysis. Variables that are defined are the chemical potential, which can be rewritten in terms of the dependent variable ψ ,

$$G = \frac{\lambda\psi}{\varepsilon^2}$$

and the surface tension force $\mathbf{F} = G\nabla\phi$.

The mean curvature (SI unit: 1/m) of the interface can be computed by entering the following expression:

$$\kappa = 2(1 + \phi)(1 - \phi)\frac{G}{\sigma}$$

Reference for the Phase Field Interface

1. P. Yue, C. Zhou, J.J. Feng, C.F. Ollivier-Gooch, and H.H. Hu, “Phase-field Simulations of Interfacial Dynamics in Viscoelastic Fluids Using Finite Elements with Adaptive Meshing,” *J. Comp. Phys.*, vol. 219, pp. 47–67, 2006.

Theory for the Ternary Phase Field Interface

The Ternary Phase Field Interface theory is described in this section:

- [About the Phase Field Method](#)
- [The Equations of the Ternary Phase Field Method](#)
- [Reference for the Phase Field Interface](#)

About the Phase Field Method

The phase field method offers an attractive alternative to more established methods for solving multiphase flow problems. Instead of directly tracking the interface between two fluids, the separating interface is identified as the region across which the phase field variables of the two adjacent phases varies between its two limiting values. The surface tension force is added to the Navier-Stokes equations as a body force by multiplying the chemical potentials of the phases by the gradient of the corresponding phase field variable.

The evolution of each phase field variable is governed by the *Cahn-Hilliard equation*, which is a 4th-order PDE. The Ternary Phase Field interface decomposes each Cahn-Hilliard equation into two second-order PDEs.

For the level set method, the fluid interface is simply advected with the flow field. The Cahn-Hilliard equation, on the other hand, does not only convect the fluid interface, but it also ensures that the total energy of the system diminishes correctly. The phase field method thus includes more physics than the level set method.

The free energy of a system of immiscible fluids consists of mixing, bulk distortion, and anchoring energy. For simple three-phase flows, only the mixing energy is retained.

The Equations of the Ternary Phase Field Method

The ternary phase field model implemented in COMSOL is based the work of Boyer and co-workers in [Ref. 1](#). The model is designed in order to study the evolution of the three immiscible phases, denoted phase A, phase B, and phase C, respectively. Each phase is represented by a phase field variable ϕ , which takes values between 0 and 1. The phase field variables satisfies the constraint

$$\sum_{i=A,B,C} \phi_i = 0 \quad (6-14)$$

and density of each phase is assumed to be constant. This implies that the phase field variable corresponds directly to the volume fraction of the phase in question.

The free energy of the three phase system is defined as a function of the phase field variables in the manner of:

$$F = \sigma_{AB}\phi_A^2\phi_B^2 + \sigma_{AC}\phi_A^2\phi_C^2 + \sigma_{BC}\phi_B^2\phi_C^2 + \phi_A\phi_B\phi_C(\Sigma_A\phi_A + \Sigma_B\phi_B + \Sigma_C\phi_C) + \Lambda\phi_A^2\phi_B^2\phi_C^2 \quad (6-15)$$

Here the σ_{ij} denotes the surface tension coefficient of the interface separating phase i and j , and the capillary parameters Σ_i are defined as

$$\Sigma_i = \sigma_{ij} + \sigma_{ik} - \sigma_{jk} \quad (6-16)$$

and Λ is a function or parameter specifying the additional free bulk energy. By default Λ is zero. In this case it can be seen that the free energy in Equation 6-15 represents the mixing energy, since only interfaces between two phases (where two phase field variables varies between the limiting values) contributes to the free energy.

The Cahn-Hilliard equations to be solved for each phase $p = A, B, C$ are

$$\frac{\partial\phi_i}{\partial t} + \frac{\partial u_j\phi_i}{\partial x_j} = \frac{\partial}{\partial x_j} \left(\frac{M_0}{\Sigma_i} \frac{\partial\eta_i}{\partial x_j} \right) \quad (6-17)$$

$$\eta_i = \frac{4\Sigma_T}{\varepsilon} \sum_{j \neq i} \left(\frac{1}{\Sigma_j} \left(\frac{\partial F}{\partial\phi_i} - \frac{\partial F}{\partial\phi_j} \right) \right) - \frac{3}{4} \varepsilon \Sigma_j \frac{\partial}{\partial x_j} \left(\frac{\partial\eta_i}{\partial x_j} \right)$$

It can be noted that the Cahn-Hilliard equation is originally a 4th-order PDE. In COMSOL Multiphysics, that PDE is split up into two second-order PDEs by introducing an additional dependent variable, the generalized potential η , one for each phase. In order to satisfy Equation 6-15, two sets of the equations shown in Equation 6-17 are solved, those for phase A and phase B. The phase field variable, and correspondingly the mass fraction, for fluid C is computed from Equation 6-15.


In Equation 6-17 ε (SI unit: 1/m) is a parameter controlling the interface thickness, M_0 (SI unit: m^3/s) is a molecular mobility parameter, and the parameter Σ_T is defined as

$$\frac{3}{\Sigma_T} = \frac{1}{\Sigma_A} + \frac{1}{\Sigma_B} + \frac{1}{\Sigma_C} \quad (6-18)$$

Reference for the Ternary Phase Field Interface

I. F. Boyer, C. Lapuerta, S. Minjeaud, B. Piar, and M. Quintard,
“Cahn-Hilliard/Navier-Stokes model for the simulation of three-phase flows”,
Transport in Porous Media, vol. 28, pp. 463–484, 2010.



Porous Media Flow Interfaces

This chapter discusses the physics interfaces found under the **Fluid Flow>Porous Media and Subsurface Flow** branch (). See [Modeling Microfluidic Fluid Flows](#) to help you select which physics interface to use.

In this chapter:

- [The Darcy's Law Interface](#)
- [The Brinkman Equations Interface](#)
- [The Free and Porous Media Flow Interface](#)
- [Theory for the Darcy's Law Interface](#)
- [Theory for the Brinkman Equations Interface](#)
- [Theory for the Free and Porous Media Flow Interface](#)

The Darcy's Law Interface

The **Darcy's Law (dl)** interface (), found under the **Porous Media and Subsurface Flow** branch () when adding a physics interface, is used to simulate fluid flow through interstices in a porous medium. It can be used to model low-velocity flows or media where the permeability and porosity are very small, and for which the pressure gradient is the major driving force and the flow is mostly influenced by the frictional resistance within the pores. Set up multiple **Darcy's Law** interfaces to model multiphase flows involving more than one mobile phase. The Darcy's Law interface can be used for stationary and time-dependent analyses.

The main feature is the Fluid and Matrix Properties node, which provides an interface for defining the fluid material along with the porous medium properties.

When this physics interface is added, the following default nodes are also added in the **Model Builder — Fluid and Matrix Properties, No Flow** (the default boundary condition), and **Initial Values**. Then, from the **Physics** toolbar, add other nodes that implement, for example, boundary conditions and mass sources. You can also right-click **Darcy's Law** to select physics features from the context menu.

SETTINGS

The **Label** is the default physics interface name.

The **Name** is used primarily as a scope prefix for variables defined by the physics interface. Refer to such physics interface variables in expressions using the pattern `<name>.<variable_name>`. In order to distinguish between variables belonging to different physics interfaces, the `name` string must be unique. Only letters, numbers, and underscores (`_`) are permitted in the **Name** field. The first character must be a letter.

The default **Name** (for the first physics interface in the model) is `dl`.

PHYSICAL MODEL

Enter a **Reference pressure level** p_{ref} (SI unit: Pa). The default value is `1[atm]`.

GRAVITY EFFECTS

This feature requires a specific license. For a detailed overview of the functionality available in each product visit <http://www.comsol.com/products/specifications/>.


By default there are no gravity effects added to Darcy's Law interface. Select the check box **Include gravity** to activate the acceleration of gravity. When this check box is selected a global **Gravity** feature node is shown in the interface model tree.

Enter a value for the acceleration of gravity. The default value `g_const` is the predefined standard acceleration of gravity on Earth.



For a detailed overview of the functionality available in each product, visit <http://www.comsol.com/products/specifications/>.

DISCRETIZATION

To display all settings available in this section, click the **Show More Options** button () and select **Advanced Physics Options** in the **Show More Options** dialog box.

You can choose the order of the shape functions used for the pressure variable solved by the Darcy's Law interface. The default shape functions are **Quadratic** Lagrange.

The **Compute boundary fluxes** check box is not activated by default. When this option is selected, the solver computes variables storing accurate boundary fluxes from each boundary into the adjacent domain.

If the check box is cleared, the COMSOL Multiphysics software instead computes the flux variables from the dependent variables using extrapolation, which is less accurate in post processing results, but does not create extra dependent variables on the boundaries for the fluxes.



Also the **Apply smoothing to boundary fluxes** check box is available if the previous check box is checked. The smoothing can provide a better behaved flux value close to singularities.

For details about the boundary fluxes settings, see [Computing Accurate Fluxes](#) in the *COMSOL Multiphysics Reference Manual*.

The **Value type when using splitting of complex variables** setting should in most pure mass transport problems be set to **Real** which is the default. It makes sure that the dependent variable does not get affected by small imaginary contributions, which can occur, for example, when combining a Time Dependent or Stationary study with a frequency-domain study. For more information, see [Splitting Complex-Valued Variables](#) in the *COMSOL Multiphysics Reference Manual*.

DEPENDENT VARIABLES

The dependent variable (field variable) is the **Pressure**. The name can be changed but the names of fields and dependent variables must be unique within a model.

	<ul style="list-style-type: none">• Domain, Boundary, Edge, Point, and Pair Nodes for the Darcy's Law Interface• Theory for the Darcy's Law Interface• Physical Constants in the <i>COMSOL Multiphysics Reference Manual</i>
	<ul style="list-style-type: none">• <i>Species Transport in the Gas Diffusion Layers of a PEM</i>: Application Library path Batteries_and_Fuel_Cells_Module/Fuel_Cells/pem_gdl_species_transport_2d• <i>Steam Reformer</i>: Application Library path Chemical_Reaction_Engineering_Module/Reactors_with_Porous_Catalysts/steam_reformer• <i>Terzaghi Compaction</i>: Application Library path Subsurface_Flow_Module/Flow_and_Solid_Deformation/terzaghi_compaction

Domain, Boundary, Edge, Point, and Pair Nodes for the Darcy's Law Interface

The [Darcy's Law Interface](#) has the following domain, boundary, edge, point, and pair nodes, these nodes are available from the **Physics** ribbon toolbar (Windows users), **Physics** context menu (Mac or Linux users), or right-click to access the context menu (all users).

DOMAIN

- Fluid and Matrix Properties
- Gravity
- Initial Values
- Storage Model
- Mass Source
- Poroelastic Storage
- Porous Electrode Coupling
- Richards' Equation Model

Note that some features are only available with certain COMSOL products (see <http://www.comsol.com/products/specifications/>).

BOUNDARY, EDGE, AND POINT

The following nodes (listed in alphabetical order) are available on exterior boundaries:

- Atmosphere/Gauge
- Cross Section
- Electrode Surface Coupling
- Flux Discontinuity
- Fracture Flow
- Hydraulic Head
- Inlet
- Interior Wall
- Line Mass Source
- Mass Flux
- No Flow
- Outlet
- Pervious Layer
- Point Mass Source
- Precipitation
- Pressure
- Pressure Head
- 1
- Symmetry
- Thickness
- Thin Barrier

¹ This node is described for the Transport of Diluted Species Interface

Note that some features are only available with certain COMSOL products (see <http://www.comsol.com/products/specifications/>)!

The relevant physics interface condition at interior boundaries is continuity:

$$\mathbf{n} \cdot (\rho_1 \mathbf{u}_1 - \rho_2 \mathbf{u}_2) = 0$$

The continuity boundary condition ensures that the pressure and mass flux are continuous. In addition, the [Pressure](#) boundary condition is available on interior boundaries.

The continuity boundary condition provides continuity for the pressure and mass flux. In addition, the following boundary conditions are available on interior boundaries:

- [Pressure](#)
- [Pressure Head](#)
- [Hydraulic Head](#)
- [Interior Wall](#)
- [Pervious Layer](#)
- [Flux Discontinuity](#)
- [Fracture Flow](#)
- [Thin Barrier](#)



In general, to add a node, go to the **Physics** toolbar, no matter what operating system you are using. Subnodes are available by clicking the parent node and selecting it from the **Attributes** menu.



For axisymmetric components, COMSOL Multiphysics takes the axial symmetry boundaries (at $r = 0$) into account and automatically adds an **Axial Symmetry** node that is valid on the axial symmetry boundaries only.



In the *COMSOL Multiphysics Reference Manual* see [Table 2-4](#) for links to common sections and [Table 2-5](#) to common feature nodes. You can also search for information: press F1 to open the **Help** window or Ctrl+F1 to open the **Documentation** window.

Fluid and Matrix Properties

The **Fluid and Matrix Properties** node adds the equations for Darcy's law, [Equation 7-1](#) and [Equation 7-2](#) (excluding any mass sources), and contains settings for the fluid properties and the porous matrix properties such as the effective porosity.

$$\frac{\partial}{\partial t}(\rho \epsilon) + \nabla \cdot (\rho \mathbf{u}) = Q_m \quad (7-1)$$

$$\mathbf{u} = -\frac{\kappa}{\mu}(\nabla p + \rho g \nabla D) \quad (7-2)$$

Note that D is the elevation which is only included in the Subsurface Flow Module. Otherwise, D is zero and Equation 7-2 simplifies to:

$$\mathbf{u} = -\frac{\kappa}{\mu} \nabla p \quad (7-3)$$

FLUID PROPERTIES

Select the **Fluid material** to use for the fluid properties. Select **Domain material** (the default) to use the material defined for the domain. Select another material to use that material's properties for the fluid.

Density

The default **Density** ρ (SI unit: kg/m³) uses values **From material** based on the **Fluid material** selection.

- For **User defined** enter another value or expression. The default is 0 kg/m³.
- For **Ideal gas** it uses the ideal gas law to describe the fluid. In this case, specify the thermodynamics properties. Select a **Gas constant type** — **Specific gas constant** R_s (the default) or **Mean molar mass** M_n (SI unit: J/(mol·K)). For **Mean molar mass** the universal gas constant $R = 8.314$ J/(mol·K) is used as the built-in physical constant. For both properties, the defaults use values **From material**. For **User defined** enter another value or expression.

Dynamic Viscosity

Select a **Dynamic viscosity** μ (SI unit: Pa·s). The default uses values **From material** as defined by the **Fluid material** selected. For **User defined** the default is 0 Pa·s.

If the settings for the dynamic viscosity are unavailable, this is due to **Hydraulic conductivity** being selected as the **Permeability model** under the **Matrix Properties** section below. The hydraulic conductivity is defined using a combination of fluid and matrix properties and replaces the need to define the dynamic viscosity. Note that this option is only available with the Subsurface Flow Module.

MATRIX PROPERTIES

Select the material to use as porous matrix. Select **Domain material** from the **Porous material** list (the default) to use the material defined for the porous domain. Select another material to use that material's properties.

The default **Porosity** ε_p (a dimensionless number between 0 and 1) uses the value **From material**, defined by the **Porous material** selected. For **User defined** the default is 0.

Select a **Permeability model** to specify the capacity of the porous material to transmit flow — **Permeability** to define the permeability of the porous matrix, **Hydraulic conductivity** to define a combination of fluid permeability and dynamic viscosity, **Kozeny-Carman** to define the permeability from the porosity and mean particle diameter, or **Non-Darcian** in cases when Darcy's linear relation between pressure drop and velocity is no longer valid due to turbulence or inertial effects.

Note that the option to choose **Hydraulic conductivity** is only available for the Subsurface Flow Module. The **Non-Darcian Flow** option is only available in some modules. For a detailed overview of the functionality available in each product, visit <http://www.comsol.com/products/specifications/>.

The default **Permeability** κ (SI unit: m^2) uses the value **From material**, as defined by the **Porous material** list. For **User defined** select **Isotropic** to define a scalar value or **Diagonal**, **Symmetric**, or **Full** to define a tensor value and enter another value or expression in the field or matrix.

For **Hydraulic conductivity** K (SI unit: m/s) select **Isotropic** to define a scalar value or **Diagonal**, **Symmetric**, or **Full** to define a tensor value. The default is $2.94 \cdot 10^{-4}$ m/s .

For **Kozeny-Carman**, enter the mean **Particle diameter** d_p (SI unit: m), the default value is 0.5 mm.

For **Non-Darcian**, choose a **Non-Darcian flow model** from the selection list. The available options, depending on the modules licensed, are **Forchheimer**, **Ergun**, **Burke-Plummer**, and **Klinkenberg**.

For **Forchheimer**, the default **Permeability** κ (SI unit: m^2) uses the value **From material**, as defined by the **Porous material** list. Furthermore, the dimensionless **Forchheimer parameter** c_F can be defined. The default value is 0.55.

If **Ergun** is selected, enter the mean **Particle diameter** d_p (default value: 0.5 mm). The permeability κ is then calculated using [Equation 7-20](#).

For **Burke-Plummer**, specify the mean **Particle diameter** d_p (default value: 0.5 mm).

If **Klinkenberg** is selected from the list, the default **Permeability** κ_∞ (SI unit: m^2) uses the value **From material**, as defined by the **Porous material** list. Enter the **Klinkenberg parameter** b_K . Its default value is $1\text{e}3$ Pa. The corrected permeability κ is then calculated using [Equation 7-27](#).

Mass Source

The **Mass Source** node adds a mass source Q_m , which appears on the right-hand side of the Darcy's Law equation (Equation 7-4, the equation for porosity).

$$\frac{\partial}{\partial t}(\rho\varepsilon) + \nabla \cdot (\rho\mathbf{u}) = Q_m \quad (7-4)$$

For the Fracture Flow Interface — which is available for the Subsurface Flow Module and the Porous Media Flow Module — the mass source is applicable to the right-hand side of Equation 7-7 (where it is multiplied with the fracture thickness).

MASS SOURCE

Enter a value or expression for the **Mass source** Q_m (SI unit: $\text{kg}/(\text{m}^3 \cdot \text{s})$). The default is $0 \text{ kg}/(\text{m}^3 \cdot \text{s})$.

Initial Values

The **Initial Values** node adds an initial value for the pressure that can serve as an initial condition for a transient simulation or as an initial guess for a nonlinear solver.

If you have the Subsurface Flow Module licensed, you can specify the pressure either directly or as an expression for the pressure head, H_p , or the hydraulic head, H ; the hydraulic head and the pressure head relate to the pressure p as

$$H_p = \frac{p}{\rho g}; \quad H = H_p + D$$

where ρ is the fluid density (SI unit: kg/m^3); g denotes the acceleration of gravity (SI unit: m/s^2); and D is the elevation (SI unit: m).

INITIAL VALUES

Enter a value or expression for the initial value of the **Pressure** p (SI unit: Pa). The default value is 0 Pa.

In case the Subsurface Flow Module is available, click the **Pressure head** button to enter a value or expression for H_p (SI unit: m). The default is 0 m. Click the **Hydraulic head** button to enter a value or expression for H (SI unit: m). The default is 0 m.

Storage Model

The **Storage Model** node adds Equation 7-2 and Equation 7-15 (excluding any mass sources). Use it to define the fluid and porous media properties, including a storage term for the specific storage.

This feature requires a specific license. For a detailed overview of the functionality available in each product visit <http://www.comsol.com/products/specifications/>.

FLUID PROPERTIES

The settings are the same as for the **Fluid and Matrix Properties** node except a gas constant type is not required.

MATRIX PROPERTIES

The settings are the same as in the **Matrix Properties** section under **Fluid and Matrix Properties**.

STORAGE MODEL

Select a **Storage** S (SI unit: 1/Pa) — **Linearized storage** (the default) or **User defined**.

- For **User defined** enter a value or expression for **Storage** S (SI unit: 1/Pa) (S_f in Equation 7-7).
- For **Linearized storage** it uses the following linear equation to define the storage:

$$S = \varepsilon\chi_f + (1 - \varepsilon_p)\chi_p$$

This is equivalent to the Reuss average of the fluid and solid compressibilities. Enter the value or expression for each of the following:

- **Compressibility of fluid** χ_f (SI unit: 1/Pa). The default uses values **From material**. For **User defined**, the default is $4 \cdot 10^{-10}$ 1/Pa.
- **Effective compressibility of matrix** χ_p (SI unit: 1/Pa). The default is $1 \cdot 10^{-4}$ 1/Pa.

FRACTURE FLOW

For the Fracture Flow Interface, enter a value or expression for the **Fracture thickness** d_f (SI unit: m). The default is 0.1 m.



Discrete Fracture: Application Library path
Subsurface_Flow_Module/Fluid_Flow/discrete_fracture

Richards' Equation Model

The **Richards' Equation Model** node defines the storage and retention models in variably saturated porous media. See the [Richards' Equation Model](#) described for the Richards' Equation interface.

This feature requires a specific license. For a detailed overview of the functionality available in each product visit <http://www.comsol.com/products/specifications/>.

Poroelastic Storage

The **Poroelastic Storage** node adds [Equation 7-2](#) and [Equation 7-15](#) (excluding any mass sources). Use it to define the fluid and porous media properties, including a storage term to account for the Poroelasticity multiphysics coupling.

This feature requires a specific license. For a detailed overview of the functionality available in each product visit <http://www.comsol.com/products/specifications/>.

FLUID PROPERTIES

The settings are the same as for the [Storage Model](#) node except a gas constant type is not required. There is also an option to define the fluid compressibility.

Compressibility

Select the **Compressibility of fluid** χ_f (SI unit: 1/Pa). The default uses values **From material** as defined by the **Fluid material** selected. For **User defined** the default is $4 \cdot 10^{-10}$ 1/Pa.

MATRIX PROPERTIES

The settings are the same as in the [Matrix Properties](#) section under [Fluid and Matrix Properties](#).

Gravity

The **Gravity** node is automatically added when **Include gravity** is selected at interface level in the **Darcy's Law** settings and it is active in all domains in which the Darcy's Law interface is applied.

This feature requires a specific license. For a detailed overview of the functionality available in each product visit <http://www.comsol.com/products/specifications/>.

COORDINATE SYSTEM SELECTION

The **Global coordinate system** is selected by default. The **Coordinate system** list contains any additional coordinate systems that the model includes. It can be used when prescribing the direction of the gravitational forces.

GRAVITY

Specify either the acceleration vector or — in case you have a Subsurface Flow Module license — the elevation.

When **Acceleration** is selected from the list, enter the components of the **Gravity vector \mathbf{g}** . The default value is `g_const` which is the physical constant having the value 9.8066 m/s^2 .

- For 3D and 2D axisymmetric models, the default value is `-g_const` in the z direction.
- For 2D models, the default value is `-g_const` in the y direction.

When **Elevation** is selected from the list, specify the **Elevation D** (SI unit: m). Select the check box **Specify reference position** to define a reference elevation.

Select the acceleration of gravity from either the Darcy's Law interface Settings (default), or specify a user defined value. When the check box **Include gravity** is not selected in the Darcy's Law interface Settings, the elevation D is set equal to zero.


Porous Electrode Coupling

Use the **Porous Electrode Coupling** node to define a mass source based on the volumetric current densities of one or multiple **Porous Electrode Reaction** nodes in an Electrochemistry interface.

The source (or sink) is proportional to the **Molar mass (kg/mol)** of the reacting species, the current densities and the stoichiometric coefficients according to Faraday's law as defined by summation over the Reaction Coefficient subnodes.

This feature requires a specific license. For a detailed overview of the functionality available in each product visit <http://www.comsol.com/products/specifications/>.

SPECIES

Based on the number of species required for the model, use the **Add (+)** and **Delete ()** buttons under the table to add or remove **Species**. Then enter a value for the **Molar mass (kg/mol)** in the applicable rows for each species.

The setting in the table will determine the number of available fields for entering the stoichiometric coefficients of the Reaction Coefficient subnodes.



Electrode Surface Coupling

Use the **Electrode Surface Coupling** node to define a combined wall and inflow/outflow boundary condition based on current densities of one or multiple Electrode Reaction nodes in an Electrochemistry interface.

The flow is proportional to the **Molar mass (kg/mol)** of the reacting species, the current densities and the stoichiometric coefficients according to Faraday's law as defined by summation over the Reaction Coefficient subnodes.

This feature requires a specific license. For a detailed overview of the functionality available in each product visit <http://www.comsol.com/products/specifications/>.

SPECIES

Based on the number of species required for the model, use the **Add** () and **Delete** () buttons under the table to add or remove **Species**. Then enter a value for the **Molar mass (kg/mol)** in the applicable rows for each species.

The setting in the table will determine the number of available field for entering the stoichiometric coefficients of the Reaction Coefficient subnodes.

Pressure


Use the **Pressure** node to specify the pressure on a boundary. In many cases the distribution of pressure is known, giving a Dirichlet condition $p = p_0$ where p_0 is a known pressure given as a number, a distribution, or an expression involving time, t , for example.

PRESSURE

Enter a value or expression for the **Pressure** p_0 (SI unit: Pa). Enter a relative pressure value in p_0 (SI unit: Pa).

For the Subsurface Flow Module, the **Pressure** node provides the pressure P_0 as a condition on edges in 3D models. Then select the edges under **Edge Selection**.

CONSTRAINT SETTINGS

To display this section, click the **Show More Options** button () and select **Advanced Physics Options** in the **Show More Options** dialog box.

Pressure constraint on edges are available for use with the Fracture Flow boundary condition (which is available in the Subsurface Flow Module). This boundary condition needs constraints on the edges surrounding the fracture-flow boundary. In other cases, pressure constraints on edges are not implemented.

Mass Flux

Use the **Mass Flux** node to specify the mass flux into or out of the model domain through some of its boundaries. It is often possible to determine the mass flux from the pumping rate or from measurements. With this boundary condition, positive values correspond to flow into the model domain:

$$\mathbf{n} \cdot \rho \frac{\kappa}{\mu} (\nabla p + \rho g \nabla D) = N_0$$

where N_0 is a value or expression for the specified inward (or outward) Darcy flux. D is the elevation head which is set to zero for other than Subsurface Flow Module applications.

MASS FLUX

Enter a value or expression for the **Inward mass flux** N_0 . A positive value of N_0 represents an inward mass flux whereas a negative value represents an outward mass flux. The units are based on the geometric entity: **Boundaries**: (SI unit: kg/(m²·s)).

Line Mass Source

The **Line Mass Source** node adds mass flow originating from a tube of infinitely small radius.

SELECTION

The **Line Mass Source** feature is available for all dimensions, but the applicable selection differs between the dimensions.

MODEL DIMENSION	APPLICABLE GEOMETRICAL ENTITY
2D	Points
2D Axisymmetry	Points not on the symmetry axis
3D	Edges

LINE MASS SOURCE

Enter a value or expression for the source strength, N_0 (SI unit: kg/(m·s)). A positive value results in mass injection from the line into the computational domain, and a negative value means that the mass is removed from the computational domain.

Line sources located on a boundary affect the adjacent computational domains. This effect makes the physical strength of a line source located in a symmetry plane twice the given strength.

Point Mass Source

The **Point Mass Source** node models mass flow originating from an infinitely small sphere centered around a point. It is available for points in 3D geometries.

POINT MASS SOURCE

Enter a value or expression for the source strength, N_0 (SI unit: kg/(s)). A positive value results in mass injection from the point into the computational domain, and a negative value means that the mass is removed from the computational domain.

Point sources located on a boundary or on an edge affect the adjacent computational domains. This has the effect, for example, that the physical strength of a point source located in a symmetry plane is twice the given strength.

Inlet

The **Inlet** node adds a boundary condition for the inflow (or outflow) perpendicular (normal) to the boundary. It has three options that can be used to specify inlet condition on a boundary, as follows:

VELOCITY

Enter a value or expression for the **Normal inflow velocity** U_0 (SI unit: m/s). A positive value of U_0 represents an inflow velocity. A negative value represents an outflow velocity. The inlet velocity boundary condition is implemented as;

$$\mathbf{n} \cdot \rho \frac{\kappa}{\mu} (\nabla p + \rho g \nabla D) = \rho U_0$$

where U_0 is a value or expression for the specified inward (or outward) Darcy velocity. A positive value of the velocity U_0 corresponds to flow into the model domain whereas a negative value represents an outflow. D is the elevation head which is set to zero for other than Subsurface Flow Module applications.

PRESSURE

Use the **Pressure** option to specify the inlet pressure on a boundary. In many cases the distribution of pressure is known, giving a Dirichlet condition $p = p_0$ where p_0 is a known pressure given as a number, a distribution, or an expression involving time, t , for example. Enter a value or expression for the **Pressure** p_0 (SI unit: Pa).

MASS FLOW

If you select **Mass flow** as the inlet condition, specify the total **Mass flow rate** M_0 (SI unit: kg/s), or the **Pointwise mass flux** N_0 (SI unit: kg/(m²·s)).

With **Mass flow rate** boundary condition, positive values correspond to flow into the model domain:

$$-\int_{\partial\Omega} \rho(\mathbf{u} \cdot \mathbf{n})dS = M_0$$


where M_0 is a value or expression for the specified inward (or outward) Darcy flux.

Pointwise mass flux boundary condition, positive values correspond to flow into the model domain:

$$\mathbf{n} \cdot \rho \frac{\kappa}{\mu} (\nabla p + \rho g \nabla D) = N_0$$

where N_0 is a value or expression for the specified inward (or outward) Darcy flux.

CONSTRAINT SETTINGS

To display this section, click the **Show More Options** button () and select **Advanced Physics Options** in the **Show More Options** dialog box.

Symmetry

The **Symmetry** node describes a symmetry boundary. The following condition implements the symmetry condition on an axis or a flow divide:

$$\mathbf{n} \cdot \frac{\kappa}{\mu} \nabla p = 0$$

$$\mathbf{n} \cdot \frac{\kappa}{\mu} (\nabla p + \rho g \nabla D) = 0$$

For axisymmetric components, COMSOL Multiphysics takes the axial symmetry boundaries (at $r = 0$) into account and automatically adds an **Axial Symmetry** node that is valid on the axial symmetry boundaries only.

No Flow

The **No Flow** node is the default boundary condition stating that there is no flow across impermeable boundaries. The mathematical formulation is:

$$\mathbf{n} \cdot \rho \frac{\kappa}{\mu} (\nabla p + \rho g \nabla D) = 0$$

where \mathbf{n} is the vector normal to the boundary. D is the elevation head which is set to zero for any other than Subsurface Flow Module applications.

Flux Discontinuity

Use the **Flux Discontinuity** node to specify a mass flux discontinuity through an interior boundary. The condition is represented by the following equation:

$$-\mathbf{n} \cdot (\rho \mathbf{u}_1 - \rho \mathbf{u}_2) = N_0$$

In this equation, \mathbf{n} is the vector normal (perpendicular) to the interior boundary, ρ is the fluid density, \mathbf{u}_1 and \mathbf{u}_2 are the Darcy velocities in the adjacent domains (as defined in Equation 7-5) and N_0 is a specified value or expression for the flux discontinuity.

$$\mathbf{u} = -\frac{\kappa}{\mu} \nabla p \quad (7-5)$$

For this boundary condition, a positive value of N_0 corresponds to a flow discontinuity in the opposite direction to the normal vector of the interior boundary.

MASS FLUX

Enter a value or expression for the **Inward mass flux** N_0 (SI unit: $\text{kg}/(\text{m}^2 \cdot \text{s})$). A positive value of N_0 represents a mass flux discontinuity in the opposite direction to the normal vector of the interior boundary.

Outlet

The **Outlet** node adds a boundary condition for the outflow (or inflow) perpendicular (normal) to the boundary. It has two options that can be used to specify inlet condition on a boundary, as follows:

VELOCITY

Enter a value or expression for the **Normal outflow velocity** U_0 (SI unit: m/s). A positive value of U_0 represents an outflow velocity whereas a negative value represents an inflow velocity.

$$-\mathbf{n} \cdot \rho \frac{\kappa}{\mu} \nabla p = \rho U_0$$

where U_0 is a specified value or expression for the outward (or inward) Darcy velocity.

PRESSURE

Similar to the inlet **Pressure** option, the outlet pressure on a boundary can be specified. Enter a value or expression for the **Pressure** p_0 (SI unit: Pa).

Precipitation

Enter a value or expression for the **Precipitation rate** which then contributes to the mass flux at the boundaries selected. If the boundary is inclined, a **Slope correction** can be applied.

This feature requires a specific license. For a detailed overview of the functionality available in each product visit <http://www.comsol.com/products/specifications/>.

Cross Section

Use this node with 1D components to model domains with another cross-sectional area than the global one that is used in the interface **Physical Model** section. In 1D geometries, the pressure is assumed to be constant in the radial direction, and Darcy's Law accounts for that.

CROSS SECTION

Enter values for the **Cross-sectional area** A_c to set the cross section of the domain in the plane perpendicular to the 1D geometry.

Thickness

Use this node with 2D and 1D axisymmetric components to model domains with another thickness than the overall thickness that is specified in the interface **Physical Model** section. In 2D geometries, the pressure is assumed to be constant in the out-of-plane direction (z direction with default spatial coordinate names). In 1D axisymmetric geometries the thickness represents the z direction.

THICKNESS

Specify a value for the **Thickness** d_z of the domain in the out-of-plane direction. This value replaces the overall thickness in the domains that are selected in the **Domain Selection** section, and is used to multiply some terms into the heat equation.

Interior Wall

The **Interior Wall** boundary condition can only be applied on interior boundaries. It is similar to the **No Flux** boundary available on exterior boundaries except that it applies on both sides of an interior boundary. It allows discontinuities of velocity and pressure across the boundary. The **Interior Wall** boundary condition can be used to avoid meshing thin structures by applying no-flux condition on interior curves and surfaces instead.

This feature requires a specific license. For a detailed overview of the functionality available in each product visit <http://www.comsol.com/products/specifications/>.

Thin Barrier

The **Thin Barrier** boundary condition models interior permeable walls, membranes, geotextiles, or perforated plates as thin permeable barriers. The **Thin Barrier** boundary condition can only be applied on interior boundaries.

This feature requires a specific license. For a detailed overview of the functionality available in each product visit <http://www.comsol.com/products/specifications/>.

WALL

Enter a value or expression for the **Thickness** d_b (SI unit: m, the default is 0.1 m) and for the **Permeability** κ_b (SI unit: m^2). The default **Permeability** κ_b uses the value **From material**. For **User defined** select **Isotropic** to define a scalar value or **Diagonal, Symmetric**, or **Full** to define a tensor value and enter another value or expression in the field or matrix.

Pressure Head


Use the **Pressure Head** node to specify the pressure head (instead of the pressure) on a boundary. It adds this boundary condition for the pressure head $H_p = H_{p0}$, where H_{p0} is a known pressure head given as a number, a distribution, or an expression involving time, t , for example. The dimension of the pressure head is length (SI unit: m).

The Subsurface Flow Module license is required to use this boundary condition (see <http://www.comsol.com/products/specifications/>).

PRESSURE HEAD

Enter a value or expression for the **Pressure head** H_{p0} (SI unit: m). The default is 0 m.

CONSTRAINT SETTINGS

To display this section, click the **Show More Options** button () and select **Advanced Physics Options** in the **Show More Options** dialog box.

Hydraulic Head


Use the **Hydraulic Head** node to specify the hydraulic head (instead of the pressure) on a boundary. This adds the Dirichlet condition for the hydraulic head $H = H_0$ where H_0 is a known hydraulic head given as a number, a distribution, or an expression involving time, t , for example.

The Subsurface Flow Module license is required to use this boundary condition (see <http://www.comsol.com/products/specifications/>).

HYDRAULIC HEAD

Enter a value or expression for the **Hydraulic head** H_0 (SI unit: m). The default is 0 m.

CONSTRAINT SETTINGS

To display this section, click the **Show More Options** button () and select **Advanced Physics Options** in the **Show More Options** dialog box.


Atmosphere/Gauge

The **Atmosphere/Gauge** node specifies an atmospheric pressure or gauges the pressure to the atmospheric value. This means that the total hydraulic potential reduces to the gravitational pressure at the free surface. At a free surface, such as a spring or a seepage face, the pressure is atmospheric. If the pressures in the model is gauged to the

atmospheric value ($p = 0$), the total hydraulic potential reduces to the gravitational potential at the free surface — for example, the height of the free surface multiplied by the fluid weight, or $\rho_f g D$. This boundary condition sets the pressure at the boundary to zero and $p = 0$.

The Subsurface Flow Module license is required to use this boundary condition (see <http://www.comsol.com/products/specifications/>).

CONSTRAINT SETTINGS

To display this section, click the **Show More Options** button () and select **Advanced Physics Options** in the **Show More Options** dialog box.

Pervious Layer

The Subsurface Flow Module license is required to use this boundary condition (see <http://www.comsol.com/products/specifications/>).

The **Pervious Layer** node provides a boundary condition that describes a mass flux through a semi-pervious layer connected to an external fluid source at different pressure, pressure head, or hydraulic head. The model domain might connect to a larger body of water through the semi-pervious layer. This condition is represented with the following boundary condition:

$$\mathbf{n} \cdot \rho \frac{\kappa}{\mu} (\nabla p + \rho g \nabla D) = \rho R_b \left[\frac{(p_b - p)}{\rho g} + (D_b - D) \right] \quad (7-6)$$

In this equation, p_b (SI unit: Pa) and D_b (SI unit: m) are the pressure and the elevation of the distant fluid source, respectively, and R_b (SI unit: 1/s) is the conductance of materials between the source and the model domain (conductance to flow in the semi-pervious layer adjacent to the boundary). Typically $R_b = K'/B'$, where K' is the hydraulic conductivity (SI unit: m/s) of the layer and B' (SI unit: m) is its thickness. Using logical relationships, it is possible to activate these expressions at different times or under various flow conditions.

When the pressure head H_p is specified instead of the pressure, the boundary condition is the following:

$$\mathbf{n} \cdot \rho K \nabla (H_p + D) = \rho R_b [(H_{pb} - H_p) + (D_b - D)] \quad (7-7)$$

H_{pb} is the pressure head (SI unit: m) at the edge of the layer.

When the hydraulic head H is specified instead of the pressure head, the boundary condition becomes:

$$\mathbf{n} \cdot \rho K \nabla H = \rho R_b [H_b - H] \quad (7-8)$$

H_b is the hydraulic head (SI unit: m) at the edge of the layer.

K in Equation 7-7 and Equation 7-8 is the hydraulic conductivity.

At a free surface, such as a water table or seepage face, the pressure is atmospheric (here taken to be zero), so the total hydraulic potential equals gravitational potential, which is defined on D .



Gravity effects are not active by default. Select the check box **Include gravity** to activate the acceleration of gravity. Setting the elevation D to zero also turns off gravity effects.

PERVIOUS LAYER

Specify the material properties whether to specify an external pressure, pressure head, or hydraulic head.

Select an **External variable to specify** — **Pressure and elevation** to specify the external pressure, **Pressure head and elevation** to specify the external pressure head, or **Hydraulic head**. For all selections, enter a value for the **Conductance** R_b (SI unit: 1/s).

- For **Pressure and elevation** enter an **External pressure** p_b (SI unit: Pa) and **External elevation** D_b (SI unit: m).
- For **Pressure head and elevation** enter an **External pressure head** H_{pb} (SI unit: m), H_{pb} (SI unit: m) and **External elevation** D_b (SI unit: m).
- For **Hydraulic head** enter the **Hydraulic head** H_b (SI unit: m).

Well

The **Well** feature is intended to model injection or production wells and is available with the Subsurface Flow Module.

WELL

Enter a value or expression for the **Well diameter** d_w (SI unit: m, the default is 0.1 m). Select the Well type from the list, Production or Injection well.



Specify either the **Pressure** (SI unit: Pa), **Pressure head** (SI unit: m), **Hydraulic head** (SI unit: m), or the **Mass flow**. If you select **Mass flow**, specify the total **Mass flow rate** (SI unit: kg/s), the **Mass flow rate per unit length** (SI unit: kg/(m·s)) or the **Mass flux** (SI unit: kg/(m²·s)).

Fracture Flow

The **Fracture Flow** node adds fracture flow on boundaries using tangential derivatives to define the flow along interior boundaries representing fractures within a porous medium. It is implemented through . Additional subnodes are available from the context menu (right-click the parent node) or from the **Physics** toolbar, **Attributes** menu.

This feature requires a specific license. For a detailed overview of the functionality available in each product visit <http://www.comsol.com/products/specifications/>.

The Brinkman Equations Interface


The **Brinkman Equations (br)** interface (), found under the **Porous Media and Subsurface Flow** branch () when adding a physics interface, is used to compute fluid velocity and pressure fields of single-phase flow in porous media in the laminar flow regime. The physics interface extends Darcy's law to describe the dissipation of the kinetic energy by viscous shear, similar to the Navier-Stokes equations. Fluids with varying density can be included at Mach numbers below 0.3. Also the viscosity of a fluid can vary, for example, to describe non-Newtonian fluids. To simplify the equations, select the Stokes-Brinkman flow feature to reduce the dependence on inertial effects when the Reynolds number is significantly less than 1. The physics interface can be used for stationary and time-dependent analyses.

The main node is the Fluid and Matrix Properties feature, which adds the Brinkman equations and provides an interface for defining the fluid material and the porous matrix.

When this physics interface is added, the following default nodes are also added in the **Model Builder — Fluid and Matrix Properties, Wall** (the default boundary type, using **No slip** as the default boundary condition), and **Initial Values**. Then, from the **Physics** toolbar, add other nodes that implement, for example, boundary conditions and volume forces. You can also right-click **Brinkman Equations** to select physics features from the context menu.

The boundary conditions are essentially the same as for the Laminar Flow interface. Differences exist for the following boundary types: Outlet, Symmetry, Open Boundary, and Boundary Stress where the viscous part of the stress is divided by the porosity to appear as

$$\frac{1}{\varepsilon_p} \left\{ \mu (\nabla \mathbf{u} + (\nabla \mathbf{u})^T) - \frac{2}{3} \mu (\nabla \cdot \mathbf{u}) \mathbf{I} \right\}$$

In the *COMSOL Multiphysics Reference Manual* see [Table 2-4](#) for links to common sections such as **Discretization, Consistent Stabilization, and Inconsistent Stabilization**, and **Advanced Settings** sections, all accessed by clicking the **Show** button () and choosing the applicable option. You can also search for information: press F1 to open the **Help** window or Ctrl+F1 to open the **Documentation** window.

SETTINGS

The **Label** is the default physics interface name.

The **Name** is used primarily as a scope prefix for variables defined by the physics interface. Refer to such physics interface variables in expressions using the pattern `<name>.<variable_name>`. In order to distinguish between variables belonging to different physics interfaces, the `name` string must be unique. Only letters, numbers, and underscores (`_`) are permitted in the **Name** field. The first character must be a letter.

The default **Name** (for the first physics interface in the model) is `br`.

PHYSICAL MODEL

This node specifies the properties of the Brinkman Equations interface, which describe the overall type of fluid flow model.

Compressibility

By default the physics interface uses the **Incompressible flow** formulation of the Brinkman equations to model constant density flow. Alternatively, select **Compressible flow (Ma<0.3)** from the **Compressibility** list if there are small variations in the density, typically dependent on the temperature (nonisothermal flow). For compressible flow modeled with the Brinkman Equations interface, the Mach number must be below 0.3.

Neglect Inertial Term (Stokes-Brinkman Flow)

The **Neglect inertial term (Stokes-Brinkman)** check box is selected by default to model flow at low Reynolds numbers for which the inertial term can be neglected. This results in the linear Stokes-Brinkman equations.

Enable porous media domains

The **Enable porous media domains** check box is selected by default to solve Brinkman equations in porous domains.


Reference Pressure Level

Enter a **Reference pressure level** p_{ref} (SI unit: Pa). The default value is 1 [atm].

DEPENDENT VARIABLES

The following dependent variables (fields) are defined for this physics interface — the **Velocity field** \mathbf{u} (SI unit: m/s) and its components, and the **Pressure** p (SI unit: Pa).

ADVANCED SETTINGS

To display this section, click the **Show More Options** button () and select **Advanced Physics Options** in the **Show More Options** dialog box. Normally these settings do not need to be changed.

The **Use pseudo time stepping for stationary equation form** option adds pseudo time derivatives to the equation when the **Stationary equation** form is used in order to speed up convergence. When selected, a **CFL number expression** should also be defined. For the default **Automatic** option, the local CFL number (from the Courant–Friedrichs–Lewy condition) is determined by a PID regulator.



- [Domain, Boundary, Point, and Pair Nodes for the Brinkman Equations Interface](#)
- [Theory for the Brinkman Equations Interface](#)
- [Pseudo Time Stepping for Laminar Flow Models and Pseudo Time Stepping in the COMSOL Multiphysics Reference Manual](#)
- [Numerical Stability — Stabilization Techniques for Fluid Flow](#)
- [Discontinuous Galerkin Formulation](#)

Domain, Boundary, Point, and Pair Nodes for the Brinkman Equations Interface

The [Brinkman Equations Interface](#) has the following domain, boundary, point, and pair nodes, listed in alphabetical order, available from the **Physics** ribbon toolbar (Windows users), **Physics** context menu (Mac or Linux users), or right-click to access the context menu (all users).



In general, to add a node, go to the **Physics** toolbar, no matter what operating system you are using. Subnodes are available by clicking the parent node and selecting it from the **Attributes** menu.

These nodes are described in this section:

- [Fluid and Matrix Properties](#)
- [Initial Values](#)
- [Mass Source](#)
- [Volume Force](#)
- [Fluid Properties](#)

The following nodes (listed in alphabetical order) are described for the Laminar Flow interface :

- [Flow Continuity](#)
- [Inlet](#)
- [Line Mass Source](#)
- [Boundary Stress](#)
- [Outlet](#)
- [Open Boundary](#)
- [Periodic Flow Condition](#)
- [Point Mass Source](#)
- [Pressure Point Constraint](#)
- [Symmetry](#)
- [Wall](#)



In the *COMSOL Multiphysics Reference Manual* see [Table 2-4](#) for links to common sections and [Table 2-5](#) to common feature nodes. You can also search for information: press F1 to open the **Help** window or Ctrl+F1 to open the **Documentation** window.

Fluid and Matrix Properties

The **Fluid and Matrix Properties** node adds the Brinkman equations: [Equation 7-28](#) and [Equation 7-29](#) (excluding any mass sources), and provides an interface for defining the properties of the fluid material and the porous matrix.

FLUID PROPERTIES

The default **Fluid material** uses the **Domain material**. Select another material as needed.

Both the default **Density** ρ (SI unit: kg/m^3) and **Dynamic viscosity** μ (SI unit: Pa·s) use values **From material** based on the **Fluid material** selection. For **User defined** enter another value or expression. In this case, the default is $0 \text{ kg}/\text{m}^3$ for the density and $0 \text{ Pa}\cdot\text{s}$ for the dynamic viscosity. The dynamic viscosity describes the relationship between the shear stresses and the shear rate in a fluid. Intuitively, water and air have

a low viscosity, and substances often described as thick, such as oil, have a higher viscosity. Non-Newtonian fluids have a viscosity that is shear-rate dependent. Examples of non-Newtonian fluids include yogurt, paper pulp, and polymer suspensions.

POROUS MATRIX PROPERTIES

The default **Porous material** uses the **Domain material** for the porous matrix. Select another material as needed.

The **Porosity** ε_p (a dimensionless number between 0 and 1) uses by default the value **From material** as defined by the **Porous material** selection. For **User defined** the default is 0.

Select a **Permeability model** to specify the capacity of the porous material to transmit flow — **Permeability** to directly enter the permeability of the porous matrix, **Kozeny-Carman** to define the permeability from the porosity and mean particle diameter, or **Non-Darcian** in cases when Darcy's linear relation between pressure drop and velocity is no longer valid due to turbulence or inertial effects. The **Non-Darcian Flow** option includes different models, some of them are only available for certain modules. For a detailed overview of the functionality available in each product, visit <http://www.comsol.com/products/specifications/>.

The default **Permeability** κ (SI unit: m^2) uses the value **From material**, as defined by the **Porous material** list. For **User defined** select **Isotropic** to define a scalar value or **Diagonal, Symmetric**, or **Full** to define a tensor value and enter another value or expression in the field or matrix.

For **Kozeny-Carman**, enter the mean **Particle diameter** d_p (SI unit: m), the default value is 0.5 mm.

For **Non-Darcian**, choose a **Non-Darcian flow model** from the selection list. The available options, depending on the modules licensed, are **Forchheimer** or **Ergun**.

For **Forchheimer**, the default **Permeability** κ (SI unit: m^2) uses the value **From material**, as defined by the **Porous material** list. Furthermore, the dimensionless **Forchheimer parameter** c_F can be defined. The default value is 0.55.

If **Ergun** is selected, enter the mean **Particle diameter** d_p (default value: 0.5 mm). The permeability κ is then calculated using [Equation 7-20](#).

Mass Source

The **Mass Source** node adds a mass source (or mass sink) Q_m to the right-hand side of the continuity equation: Equation 7-28. This term accounts for mass deposit and/or mass creation in porous domains. The physics interface assumes that the mass exchange occurs at zero velocity.

$$\frac{\partial}{\partial t}(\varepsilon_p \rho) + \nabla \cdot (\rho \mathbf{u}) = Q_m \quad (7-9)$$

DOMAIN SELECTION

Only Porous Matrix domains are available.

MASS SOURCE

Enter a value or expression for the **Source term** Q_{br} (SI unit: $\text{kg}/(\text{m}^3 \cdot \text{s})$). The default is $0 \text{ kg}/(\text{m}^3 \cdot \text{s})$.

Volume Force

Use the **Volume Force** node to specify the force \mathbf{F} on the right-hand side of Equation 7-29. It then acts on each fluid element in the specified domains. A common application is to include gravity effects.

$$\begin{aligned} \frac{\rho}{\varepsilon_p} \left(\frac{\partial \mathbf{u}}{\partial t} + (\mathbf{u} \cdot \nabla) \frac{\mathbf{u}}{\varepsilon_p} \right) = \\ -\nabla p + \nabla \cdot \left[\frac{1}{\varepsilon_p} \left\{ \mu (\nabla \mathbf{u} + (\nabla \mathbf{u})^T) - \frac{2}{3} \mu (\nabla \cdot \mathbf{u}) \mathbf{I} \right\} \right] - \left(\kappa^{-1} \mu + \frac{Q_m}{\varepsilon_p^2} \right) \mathbf{u} + \mathbf{F} \end{aligned} \quad (7-10)$$

VOLUME FORCE

Enter the components of **Volume force** \mathbf{F} (SI unit: N/m^3).

Initial Values

The **Initial Values** node adds initial values for the velocity field and the pressure that can serve as an initial condition for a transient simulation or as an initial guess for a nonlinear solver.

INITIAL VALUES

Enter initial values or expressions for the **Velocity field \mathbf{u}** (SI unit: m/s) and the **Pressure p** (SI unit: Pa). The default values are 0 m/s and 0 Pa, respectively.

Fluid Properties

The **Fluid Properties** node adds the momentum and continuity equations to solve for free flow in nonporous domains. The node also provides an interface for defining the material properties of the fluid.

MODEL INPUTS

Fluid properties, such as density and viscosity, can be defined through user inputs, variables or by selecting a material. For the latter option, additional inputs — for example, temperature or pressure — may be required to define these properties.

Temperature

By default, the single-phase flow interfaces are set to model isothermal flow. Hence, the **Temperature** is **User defined** and defaults to 293.15 K. If a Heat Transfer interface is included in the component, the temperature may alternatively be selected from this physics interface. All physics interfaces have their own tags (**Name**). For example, if a Heat Transfer in Fluids interface is included in the component, the **Temperature (ht)** option is available.


Absolute Pressure

This input appears when a material requires the absolute pressure as a model input. The absolute pressure is used to evaluate material properties, but it also relates to the value of the calculated pressure field. There are generally two ways to calculate the pressure when describing fluid flow: either to solve for the absolute pressure or for a pressure (often denoted gauge pressure) that relates to the absolute pressure through a reference pressure.

The choice of pressure variable depends on the system of equations being solved. For example, in a unidirectional incompressible flow problem, the pressure drop over the modeled domain is probably many orders of magnitude smaller than the atmospheric pressure, which, when included, may reduce the stability and convergence properties of the solver. In other cases, such as when the pressure is part of an expression for the gas volume or the diffusion coefficients, it may be more convenient to solve for the absolute pressure.

The default **Absolute pressure** p_A is $p+p_{\text{ref}}$ where p is the dependent pressure variable from the Navier-Stokes equations, and p_{ref} is from the user input defined at the physics

interface level. When p_{ref} is nonzero, the physics interface solves for a gauge pressure. If the pressure field instead is an absolute pressure field, p_{ref} should be set to 0.



The **Absolute pressure** field can be edited by clicking **Make All Model Inputs Editable** () and entering the desired value in the input field.

FLUID PROPERTIES

If density variations with respect to pressure are to be included in the computations, the flow must be set to compressible.

The **Dynamic viscosity** μ describes the relationship between the shear rate and the shear stresses in a fluid. Intuitively, water and air have low viscosities, and substances often described as thick (such as oil) have higher viscosities.

The Free and Porous Media Flow Interface

The **Free and Porous Media Flow (fp)** interface (), found under the **Porous Media and Subsurface Flow** branch () when adding a physics interface, is used to compute fluid velocity and pressure fields of single-phase flow where free flow is connected to porous media. The Free and Porous Media Flow interface is used over at least two different domains: a free channel and a porous medium. The physics interface is well suited for transitions between slow flow in porous media, governed by the Brinkman equations, and fast flow in channels described by the Navier-Stokes equations. Fluids with varying density can be included at Mach numbers below 0.3. Also the viscosity of a fluid can vary, for example, to describe non-Newtonian fluids. The physics interface can be used for stationary and time-dependent analyses.

When this physics interface is added, the following default nodes are also added in the **Model Builder — Fluid Properties, Wall, and Initial Values**. Then, from the **Physics** toolbar, add a **Fluid and Matrix Properties** node to be used on the domain selection corresponding to the porous media, or add other nodes that implement, for example, boundary conditions and volume forces. You can also right-click **Free and Porous Media Flow** to select physics features from the context menu.

SETTINGS

The **Label** is the default physics interface name.

The **Name** is used primarily as a scope prefix for variables defined by the physics interface. Refer to such physics interface variables in expressions using the pattern `<name>.<variable_name>`. In order to distinguish between variables belonging to different physics interfaces, the **name** string must be unique. Only letters, numbers, and underscores (`_`) are permitted in the **Name** field. The first character must be a letter.

The default **Name** (for the first physics interface in the model) is `fp`.

PHYSICAL MODEL

Compressibility

By default the physics interface uses the **Incompressible flow** formulation of the Navier-Stokes and Brinkman equations to model constant density flow. If required, select **Compressible flow (Ma<0.3)** from the **Compressibility** list, to account for small

variations in the density, typically dependent on the temperature (nonisothermal flow). For compressible flow modeled with this physics interface, the Mach number must be below 0.3.

Neglect Inertial Term

Select the **Neglect inertial term (Stokes flow)** check box if the inertial forces are small compared to the viscous forces. This is typical for creeping flow, where $\text{Re} \ll 1$.

Reference Pressure Level

Enter a **Reference pressure level** p_{ref} (SI unit: Pa). The default value is 1[atm].

Reference Temperature

Enter a **Reference temperature** T_{ref} (SI unit: K). The default value is 293.15[K].

DEPENDENT VARIABLES

The following dependent variables (fields) are defined for this physics interface — the **Velocity field \mathbf{u}** (SI unit: m/s) and its components, and the **Pressure p** (SI unit: Pa).



- [Domain, Boundary, Point, and Pair Nodes for the Free and Porous Media Flow Interface](#)
 - [Theory for the Free and Porous Media Flow Interface](#)
-

Domain, Boundary, Point, and Pair Nodes for the Free and Porous Media Flow Interface

The [Free and Porous Media Flow Interface](#) has the following domain, boundary, point, and pair nodes, listed in alphabetical order, available from the **Physics** ribbon toolbar (Windows users), **Physics** context menu (Mac or Linux users), or right-click to access the context menu (all users).



In general, to add a node, go to the **Physics** toolbar, no matter what operating system you are using. Subnodes are available by clicking the parent node and selecting it from the **Attributes** menu.

- Fluid Properties
- Initial Values
- Mass Source
- Fluid and Matrix Properties
- Mass Source
- Volume Force
- Wall

The following nodes (listed in alphabetical order) are described for the Laminar Flow interface:

- No Viscous Stress
- Flow Continuity
- Inlet
- Line Mass Source
- Outlet
- Open Boundary
- Periodic Flow Condition
- Point Mass Source
- Pressure Point Constraint
- Symmetry



In the *COMSOL Multiphysics Reference Manual* see [Table 2-4](#) for links to common sections and [Table 2-5](#) to common feature nodes. You can also search for information: press F1 to open the **Help** window or Ctrl+F1 to open the **Documentation** window.

Fluid Properties

Use the **Fluid Properties** node to define the fluid material, density, and dynamic viscosity.

FLUID PROPERTIES

The default **Fluid material** uses the **Domain material** (the material defined for the domain). Select another material as needed.

The default **Density** ρ (SI unit: kg/m^3) uses values **From material** based on the **Fluid material** selection. For **User defined** enter another value or expression. The default is $0 \text{ kg}/\text{m}^3$.

The **Dynamic viscosity** μ (SI unit: Pa·s) uses values **From material** based on the **Fluid material** selection. For **User defined** enter another value or expression. The default is $0 \text{ Pa}\cdot\text{s}$.

Fluid and Matrix Properties

Use the **Fluid and Matrix Properties** node to define which domains contain porous material and to define the porous matrix properties, such as the porosity and permeability in these domains.

DOMAIN SELECTION

Choose domains from the **Selection** list, to solve for porous media flow governed by the Brinkman equations. In the domains not selected, the Free and Porous Media Flow interface solves for laminar flow governed by the Navier-Stokes (or Stokes) equations.

POROUS MATRIX PROPERTIES

The default **Porous material** uses the **Domain material** for the porous matrix. Select another material as needed.

The **Porosity** ε_p (a dimensionless number between 0 and 1) uses by default the value **From material** as defined by the **Porous material** selection. For **User defined** the default is 0.



In this node you specify the porosity ε_p , whereas in other nodes the volume fraction of solid material $\theta_p = 1 - \varepsilon_p$ is required instead. See [Porous Medium](#) in the *Heat Transfer Module User's Guide* for an example.

Select a **Permeability model** to specify the capacity of the porous material to transmit flow — **Permeability** to directly enter the permeability of the porous matrix, **Kozeny-Carman** to define the permeability from the porosity and mean particle diameter, or **Non-Darcian** in cases when Darcy's linear relation between pressure drop and velocity is no longer valid due to turbulence or inertial effects. The **Non-Darcian Flow** option is only available for the Subsurface Flow Module and the Porous Media Flow Module. For a detailed overview of the functionality available in each product, visit <http://www.comsol.com/products/specifications/>.

The default **Permeability** κ (SI unit: m^2) uses the value **From material**, as defined by the **Porous material** list. For **User defined** select **Isotropic** to define a scalar value or **Diagonal**, **Symmetric**, or **Full** to define a tensor value and enter another value or expression in the field or matrix.

For **Kozeny-Carman**, enter the mean **Particle diameter** d_p (SI unit: m), the default value is 0.5 mm.

For **Non-Darcian**, choose a **Non-Darcian flow model** from the selection list. The available options, depend on the modules licensed, are **Forchheimer** or **Ergun**.

For **Forchheimer**, the default **Permeability** κ (SI unit: m^2) uses the value **From material**, as defined by the **Porous material** list. Furthermore, the dimensionless **Forchheimer parameter** c_F can be defined. The default value is 0.55.

If **Ergun** is selected, enter the mean **Particle diameter** d_p (default value: 0.5 mm). The permeability κ is then calculated using .

Mass Source

Enter a value or expression for an optional mass source (or sink) **Source term** Q_m (SI unit: $\text{kg}/(\text{m}^3 \cdot \text{s})$). This term accounts for mass deposit or mass creation within porous domains. The physics interface assumes that the mass exchange occurs at zero velocity.

Volume Force

The **Volume Force** node specifies the force \mathbf{F} on the right-hand side of the Navier-Stokes or Brinkman equations, depending on whether the **Porous Matrix Properties** node is active for the domain. Use it, for example, to incorporate the effects of gravity in a model.

VOLUME FORCE

Enter the components of the **Volume force** \mathbf{F} (SI unit: N/m^3).

Initial Values

The **Initial Values** node adds initial values for the velocity field and the pressure that can serve as an initial condition for a transient simulation or as an initial guess for a nonlinear solver.

INITIAL VALUES

Enter initial values or expressions for the **Velocity field** \mathbf{u} (SI unit: m/s) and for the **Pressure** p (SI unit: Pa). The default values are 0 m/s and 0 Pa, respectively.

Microfluidic Wall Conditions

Use the **Microfluidic Wall Conditions** node to add boundary conditions to the moving wall and specify whether to use viscous slip or thermal creep.

BOUNDARY CONDITION

The default **Boundary condition** for the wall is **Slip velocity**. Enter values or expressions for the components of the **Velocity of moving wall** \mathbf{u}_w (SI unit: m/s).

Use Viscous Slip

Select the **Use viscous slip** check box to define the slip length:

- The default is **User defined**. Enter a value for L_s (SI unit: m). The default is 1e-7 m.
- Select **Maxwell's model** to calculate it from:

$$L_s = \left(\frac{2 - \alpha_v}{\alpha_v} \right) \lambda$$

- Then enter values or expressions for the **Tangential momentum accommodation coefficient** (TMAC) α_v (dimensionless) (the default is 0.9) and the **Mean free path** λ (SI unit: m) (the default is 1e-6 m).

Use Thermal Creep

Select the **Use thermal creep** check box to activate the thermal creep component of the boundary condition. Enter the fluid's **Temperature** T (SI unit: K) and the **Thermal slip coefficient** σ_T . The default temperature is 293.15 K and the default thermal slip coefficient is 0.75.

If you also have a license for the MEMS Module, an additional **Boundary condition** option **Electroosmotic velocity** is available. This is described in the *MEMS Module User's Guide*.

Wall

The **Wall** node includes a set of boundary conditions describing fluid-flow conditions at stationary, moving, and leaking walls.

BOUNDARY CONDITION

Select a **Boundary condition** for the wall.

- [No Slip](#)¹
- [Slip](#)
- [Leaking Wall](#)

No Slip

No slip is the default boundary condition for a stationary solid wall for laminar flow (and SST, Low Re k - ϵ , Algebraic y Plus, L-VEL, and Spalart-Allmaras turbulence models). The condition prescribes $\mathbf{u} = 0$; that is, the fluid at the wall is not moving.


Slip

The **Slip** option prescribes a no-penetration condition, $\mathbf{u} \cdot \mathbf{n} = 0$. It is implicitly assumed that there are no viscous effects at the slip wall and hence, no boundary layer develops. From a modeling point of view, this can be a reasonable approximation if the main effect of the wall is to prevent fluid from leaving the domain.

Leaking Wall

This boundary condition may be used to simulate a wall where fluid is leaking into or leaving the domain with the velocity $\mathbf{u} = \mathbf{u}_1$ through a perforated wall. The components of the **Fluid velocity** \mathbf{u}_1 on the leaking wall should be specified.

CONSTRAINT SETTINGS

This section is displayed by clicking the **Show** button () and selecting **Advanced Physics Options**.



- [Theory for the Wall Boundary Condition](#)
 - [The Moving Mesh Interface in the *COMSOL Multiphysics Reference Manual*](#)
-

Theory for the Darcy's Law Interface

The Darcy's Law Interface theory is described in this section:

- [About Darcy's Law](#)
- [Darcy's Law — Equation Formulation](#)
- [Storage Model](#)
- [Hydraulic Head, Pressure Head, and Elevation Head](#)
- [Average Linear Velocity](#)
- [Permeability Models and Non-Darcian Flow](#)
- [References for the Darcy's Law Interface](#)

About Darcy's Law

In a porous medium, the global transport of momentum by shear stresses in the fluid is often negligible, because the pore walls impede momentum transport to the fluid outside the individual pores. A detailed description, down to the resolution of every pore, is not practical in most applications. A homogenization of the porous and fluid media into a single medium is a common alternative approach. Darcy's law together with the continuity equation and equation of state for the pore fluid (or gas) provide a complete mathematical model suitable for a wide variety of applications involving porous media flows, for which the pressure gradient is the major driving force.

Darcy's law describes fluid movement through interstices in a porous medium. Because the fluid loses considerable energy to frictional resistance within pores, flow velocities in porous media are very low. The Darcy's Law interface can be applied to small-scale tasks in chemical engineering as well as to large-scale geophysical or hydrological tasks such as water moving in an aquifer or stream bank, oil migrating to a well, and even magma rising through the earth to a chamber in a volcano (see [Ref. 1](#), [Ref. 2](#), [Ref. 3](#), and [Ref. 4](#)). Also set up multiple Darcy's Law interfaces to model multiphase flows involving more than one mobile phase.

Darcy's law describes flow in porous media driven by gradients in the hydraulic potential field, which has units of pressure. For many applications it is convenient to represent the total hydraulic potential or the pressure and the gravitational components with equivalent heights of fluid or head. Division of potential by the fluid weight can simplify modeling because units of length make it straightforward to

compare to many physical data. Consider, for example, fluid levels in wells, stream heights, topography, and velocities. The physics interface also supports specifying boundary conditions and result evaluation using hydraulic head and pressure head. In the physics interface, pressure is always the dependent variable.

Darcy's Law — Equation Formulation

Darcy's law states that the velocity field is determined by the pressure gradient, the fluid viscosity, and the structure of the porous medium:

$$\mathbf{u} = -\frac{\kappa}{\mu}\nabla p \quad (7-11)$$

In this equation, \mathbf{u} is the Darcy's velocity or specific discharge vector (SI unit: m/s); κ is the permeability of the porous medium (SI unit: m^2); μ is the fluid's dynamic viscosity (SI unit: Pa·s); p is the pore pressure (SI unit: Pa) and ρ is the density of the fluid (SI unit: kg/m^3).

For large-scale applications it might be necessary to take gravity effects into account. Darcy's law then applies when the gradient in hydraulic potential drives fluid movement in the porous medium. Visualize the hydraulic potential field by considering the difference in both pressure and elevation potential from the start to the end points of the flow line. According to Darcy's law, the net flux across a face of porous surface is

$$\mathbf{u} = -\frac{\kappa}{\mu}(\nabla p + \rho\mathbf{g}) \quad (7-12)$$

In this equation \mathbf{g} is the vector of gravitational acceleration. Furthermore, in the Subsurface Flow Module, \mathbf{g} can be defined as $\mathbf{g} = -g\nabla D$ where g is the magnitude of gravitational acceleration (SI unit: m/s^2), D is the elevation (SI unit: m), and ∇D is a unit vector in the direction over which the gravity acts. Here the permeability κ

represents the resistance to flow over a representative volume consisting of many solid grains and pores.



- Note that gravity effects are only included in some modules. For a detailed overview of the functionality available in each product visit <http://www.comsol.com/products/specifications/>.
- Gravity effects are not active by default. Select the check box **Include gravity** to activate the acceleration of gravity. Setting the elevation D to zero also turns off gravity effects.

The Darcy's Law interface combines Darcy's law with the continuity equation

$$\frac{\partial}{\partial t}(\rho \varepsilon_p) + \nabla \cdot (\rho \mathbf{u}) = Q_m \quad (7-13)$$

In the above equation, ρ is the fluid density (SI unit: kg/m^3), ε_p is the porosity, and Q_m is a mass source term (SI unit: $\text{kg}/(\text{m}^3 \cdot \text{s})$). Porosity is defined as the fraction of the control volume that is occupied by pores. Thus, the porosity can vary from zero for pure solid regions to unity for domains of free flow.

Storage Model

Inserting Darcy's law (Equation 7-12) into the continuity equation produces the generalized governing equation

$$\frac{\partial}{\partial t}(\rho \varepsilon_p) + \nabla \cdot \rho \left[-\frac{\kappa}{\mu} (\nabla p) \right] = Q_m \quad (7-14)$$

Represent this equation fully in COMSOL Multiphysics because relationships between density or permeability can be freely specified, for example, and pressure, temperature, concentration, and so on.

Expand the time-derivative term in Equation 7-14

$$\frac{\partial}{\partial t}(\rho \varepsilon_p) = \varepsilon_p \frac{\partial \rho}{\partial t} + \rho \frac{\partial \varepsilon_p}{\partial t}$$

Define the porosity and the density as functions of the pressure, and apply the chain rule

$$\epsilon_p \frac{\partial p}{\partial t} + \rho \frac{\partial \epsilon_p}{\partial t} = \epsilon_p \frac{\partial p}{\partial p} \frac{\partial p}{\partial t} + \rho \frac{\partial \epsilon_p}{\partial p} \frac{\partial p}{\partial t}$$

Insert the definition of fluid compressibility $\chi_f = (1/\rho)(\partial\rho/\partial p)$ to the right-hand side and rearrange to arrive at

$$\frac{\partial(\rho\epsilon_p)}{\partial t} = \rho \left(\epsilon_p \chi_f + \frac{\partial \epsilon_p}{\partial p} \right) \frac{\partial p}{\partial t} = \rho S \frac{\partial p}{\partial t}$$

Using this relation, the generalized governing equation (Equation 7-14) takes the following form:

$$\rho S \frac{\partial p}{\partial t} + \nabla \cdot \rho \left[-\frac{\kappa}{\mu} (\nabla p + \rho g \nabla D) \right] = Q_m \quad (7-15)$$

In this equation, S is the storage coefficient (SI unit: 1/Pa), which can be interpreted as the weighted compressibility of the porous material and the fluid. The storage S can be an expression involving results from a solid-deformation equation or an expression involving temperatures and concentrations from other analyses. The Darcy's Law interface implements Equation 7-15 using the Storage Model node, which explicitly includes an option to define S as the *linearized storage* (SI unit: 1/Pa) using the compressibility of fluids and porous matrix.



Note that the Storage Model node is only available for the Subsurface Flow Module and the Porous Media Flow Module. For a detailed overview of the functionality available in each product visit <http://www.comsol.com/products/specifications/>.

Hydraulic Head, Pressure Head, and Elevation Head

Hydraulic head, H , pressure head, H_p , and elevation head, D , relate to pressure p as

$$H_p = \frac{p}{\rho g}; \quad H = H_p + D \quad (7-16)$$

where ρ is the fluid density, g denotes the acceleration of gravity, and D is the elevation. When defined as vertical elevation, the horizontal gradients in D equal zero and vertical gradients in D equal one. Choose to specify pressure, hydraulic head, or pressure head on the boundaries of a model, either directly or as part of the pervious

layer boundary condition. Also use pressure, hydraulic head, and pressure head during analysis and postprocessing.



- Turning off gravity effects sets the elevation D to zero, and the hydraulic head equals the pressure head.
- This feature is only available with the Subsurface Flow Module

Average Linear Velocity

Because fluids typically occupy only 10% to 50% of a porous medium, it follows that velocities within the pore channels exceed the Darcy velocity, \mathbf{u} , on the order of two to ten times. For clarity, the physics interface includes the average linear velocity within the pores, \mathbf{u}_α , (also termed the seepage velocity) defined as $\mathbf{u}_\alpha = \mathbf{u}/\varepsilon_p$, where ε_p is the porosity.

Permeability Models and Non-Darcian Flow

Different models can define the capacity of the porous medium to transmit flow. Some use the permeability, κ , and the viscosity of the fluid, μ , and others use the hydraulic conductivity, K (SI unit: m/s).

HYDRAULIC CONDUCTIVITY

The hydraulic conductivity represents both fluid and solid properties. If the model is defined using the hydraulic conductivity as in:

$$\frac{\kappa}{\mu} = \frac{K}{\rho g}$$

Equation 7-12 changes to

$$\mathbf{u} = -\frac{\mathbf{K}}{\rho g}(\nabla p + \rho g \nabla D) \quad (7-17)$$

The hydraulic potential in the equation comes from the pore pressure, p , and gravity, $\rho g D$. COMSOL Multiphysics solves for the pressure, p . By default, g is the predefined acceleration of gravity (a physical constant), and D is the vertical coordinate. The choice of D has a significant impact on results and the physics involved. For example, if D is the vertical coordinate z and if the flow is entirely horizontal within the xy -plane, then the gradient in D vanishes and the driving force is caused by pressure gradients alone.

KOZENY-CARMAN

The Kozeny-Carman equation describes the flow through granular soils and packed beds by estimating the permeability of the porous medium from the porosity ϵ_p and average particle diameter d_p (see, for example, [Ref. 5](#))

$$\kappa = \frac{d_p^2}{180} \frac{\epsilon_p^3}{(1 - \epsilon_p)^2}$$

If the model is defined using the Kozeny-Carman equation, the expression for Darcy's velocity in [Equation 7-12](#) changes to

$$\mathbf{u} = -\frac{d_p^2}{180\mu} \frac{\epsilon_p^3}{(1 - \epsilon_p)^2} (\nabla p) \quad (7-18)$$



The hydraulic conductivity combines properties of both the fluid and porous matrix, while the permeability is a property of the porous matrix only.

In case of relatively fast flow ($Re > 10$) or relatively high Knudsen numbers ($Kn > 0.1$) Darcy's linear relation between velocity and pressure drop is no longer valid. Therefore, different permeability models have been introduced to capture these effects.

The flow regime through a packed bed may be identified from the Reynolds number of the bed. According to textbooks, for Reynolds numbers $Re < 10$ the flow can be described by Kozeny-Carman equation (Darcian flow). For $10 < Re < 1000$, which is sometimes called the *transitional regime*, the flow is better described by the non-Darcian Ergun equation, and for $Re > 1000$ Ergun's equation can be approximated by the Burke-Plummer equation for turbulent flows.

ERGUN

The Ergun equation is an extension of Kozeny-Carman equation to higher Reynolds numbers ($Re > 10$), where Darcy's linear relation between pressure drop and velocity is no longer valid. In Ergun equation the linear relation between pressure drop and velocity is augmented by a quadratic term. The pressure drop ([Ref. 6](#)) in Ergun's equation is given by:

$$-\nabla p = \frac{150(1-\varepsilon_p)^2}{d_p^2 \varepsilon_p^3} \mu \mathbf{u} + \frac{1.75(1-\varepsilon_p)}{d_p \varepsilon_p^3} \rho \mathbf{u} |\mathbf{u}| \quad (7-19)$$

Here, d_p is the effective (average) particle diameter in the porous medium and ε_p is the porosity. With definitions of permeability κ and parameter β (SI unit 1/m) as

$$\kappa = \frac{d_p^2 \varepsilon_p^3}{150(1-\varepsilon_p)^2} \quad (7-20)$$

and

$$\beta = \frac{1.75(1-\varepsilon_p)}{d_p \varepsilon_p^3} \quad (7-21)$$

we get

$$\nabla p = -\frac{\mu}{\kappa} \mathbf{u} - \beta \rho |\mathbf{u}| \mathbf{u}$$

Ergun's velocity can then be calculated as

$$\mathbf{u} = -\frac{\kappa}{\mu} \frac{2}{1 + \sqrt{1 + 4\left(\frac{\kappa}{\mu}\right)^2 \beta \rho |\nabla p|}} \nabla p \quad (7-22)$$

Using the Reynolds number Re and the friction factor f_p for packed beds

$$Re = \frac{d_p \rho |\mathbf{u}|}{(1-\varepsilon_p) \mu}$$

$$f_p = |\nabla p| \frac{d_p \varepsilon_p^3}{\rho \mathbf{u}^2 (1-\varepsilon_p)} = \frac{150}{Re} + 1.75,$$

Ergun's velocity can alternatively be written as

$$\mathbf{u} = -\frac{\kappa}{\mu} \frac{1}{1 + \frac{1.75}{150} Re} \nabla p = -\frac{\kappa}{\mu} \left(1 - \frac{1.75}{f_p}\right) \nabla p$$

From this expression, we observe that for low Reynolds numbers $Re < 1$ (or equivalently, high friction factors) the flow can be described by the linear Darcy's Law.

FORCHHEIMER

For increasing filter velocities ($Re > 10$), inertial effects and turbulent friction forces become significant. In the Forchheimer drag this is considered by adding an additional term to Darcy's law:

$$-\nabla p = \frac{\mu}{\kappa} \mathbf{u} + \frac{c_F}{\sqrt{\kappa}} \rho \mathbf{u} |\mathbf{u}| \quad (7-23)$$

Here, the Forchheimer parameter c_F is dimensionless. The permeability κ is specified by the user and is not computed from porosity nor particle diameter as for Ergun's equation. If the parameter β is defined as

$$\beta = \frac{c_F}{\sqrt{\kappa}}$$

Equation 7-23 becomes equivalent to Ergun's equation (Equation 7-19)

$$-\nabla p = \frac{\mu}{\kappa} \mathbf{u} + \beta \rho \mathbf{u} |\mathbf{u}|$$

BURKE-PLUMMER

The Burke-Plummer equation is applicable in flow regimes with Reynolds number $Re > 1000$. Here, the pressure drop is proportional to the square of the velocity:

$$\frac{\Delta p}{L} = \frac{1.75(1 - \epsilon_p)}{d_p} \frac{1}{\epsilon_p^3} \rho v^2 \quad (7-24)$$

here, L is the length of the packed bed, Δp is the pressure drop d_p is the effective (average) particle diameter in the porous medium, ϵ_p is the porosity, and v is the velocity magnitude.

Using the same definition for the parameter β (SI unit 1/m) as in Ergun's equation

$$\beta = \frac{1.75(1 - \epsilon_p)}{d_p} \frac{1}{\epsilon_p^3}$$

the pressure drop is related to the velocity as

$$\frac{\Delta p}{L} = \beta \rho v^2 \quad (7-25)$$

which means that the velocity magnitude can be written in terms of the pressure gradient as

$$v = \sqrt{\frac{|\nabla p|}{\beta\rho}}$$

As flow travels from areas of higher pressure to areas of lower pressure, Equation 7-19 can be more generally written as

$$-\nabla p = \beta\rho|\mathbf{u}|\mathbf{u}$$

replacing

$$|\mathbf{u}| = v = \sqrt{|\nabla p|/\beta\rho}$$

we get an expression for the velocity field in terms of the pressure gradient

$$\mathbf{u} = -\frac{1}{\sqrt{\beta\rho|\nabla p|}}\nabla p \quad (7-26)$$

Note that the viscosity is not used to define the velocity as in Darcy's law, but only the fluid density, the porosity and particle diameter. Note also that the analytical friction factor for Burke-Plummer equation is $f_p = 1.75$. A small parameter is added inside the square-root to avoid division by zero when the pressure gradient approaches zero.

KLINKENBERG

The Klinkenberg effect becomes important for gas flows in porous media where the mean free path of the gas molecules is comparable to the pore dimensions. In this case, molecular collisions with the pore walls occur more often than collisions between molecules. To take this effect into account, Klinkenberg (Ref. 7) derived the following expression for the permeability:

$$\kappa = \kappa_\infty \left(1 + \frac{b_K}{p_A} \right) \quad (7-27)$$

here, κ_∞ is the permeability of the gas at high pressure and density (Knudsen number $0.001 < \text{Kn} < 0.1$), b_K is the Klinkenberg parameter (also called *Klinkenberg slip factor*, or *gas slippage factor*), whose default value is set to 1 kPa according to Ref. 8, and p_A is the absolute pressure as defined in the Darcy's Law interface ($p_A = p + p_{\text{ref}}$).

References for the Darcy's Law Interface

-
1. J. Bear, *Hydraulics of Groundwater*, McGraw-Hill, 1979.

2. S.E. Ingebritsen and W.E. Sanford, *Groundwater in Geologic Processes*, Cambridge University Press, 1998.
3. N.H. Sleep and K. Fujita, *Principles of Geophysics*, Blackwell Science, 1997.
4. D.L. Turcotte and G. Schubert, *Geodynamics*, Cambridge University Press, 2002.
5. J. Bear, *Dynamics of Fluids in Porous Media*, Elsevier Scientific Publishing, 1972.
6. Ö. Akgiray and A.M. Saatçı, “A New Look at Filter Backwash Hydraulics,” *Water Science and Technology: Water Supply*, vol. 1, no. 2, pp. 65–72, 2001.
7. L. Klinkenberg, “The permeability of porous media to liquids and gases,” *Drilling and Production Practice*, Am. Petroleum Inst., pp. 200–213, 1941.
8. Yu-Shu Wu et al., “Gas Flow in Porous Media with Klinkenberg Effects,” *Transport in Porous Media*, vol. 32, pp. 117–137, 1998.

Theory for the Brinkman Equations Interface

The [Brinkman Equations Interface](#) theory is described in this section:

- [About the Brinkman Equations](#)
- [Brinkman Equations Theory](#)
- [References for the Brinkman Equations Interface](#)

About the Brinkman Equations

The *Brinkman equations* describe fluids in porous media for which the momentum transport within the fluid due to shear stresses is of importance. This mathematical model extends Darcy's law to include a term that accounts for the viscous transport in the momentum balance, and it treats both the pressure and the flow velocity vector as independent variables. Use the Free and Porous Media Flow interface to model combinations of porous media and free flow domains. These types of problems are often encountered in applications such as monolithic reactors and fuel cells.



[The Free and Porous Media Flow Interface](#)

In porous domains, the flow variables and fluid properties are defined at any point inside the medium by means of averaging of the actual variables and properties over a certain volume surrounding the point. This control volume must be small compared to the typical macroscopic dimensions of the problem, but it must be large enough to contain many pores and solid matrix elements.

Porosity is defined as the fraction of the control volume that is occupied by pores. Thus, the porosity can vary from zero for pure solid regions to unity for domains of free flow.

The physical properties of the fluid, such as density and viscosity, are defined as *intrinsic volume averages* that correspond to a unit volume of the pores. Defined this way, they present the relevant physical parameters that can be measured experimentally, and they are assumed to be continuous with the corresponding parameters in the adjacent free flow.

The flow velocity is defined as a *superficial volume average*, and it corresponds to a unit volume of the medium including both the pores and the matrix. It is sometimes called the Darcy velocity, defined as the volume flow rate per unit cross section of the medium. Such a definition makes the velocity field continuous across the boundaries between porous regions and regions of free flow.

Brinkman Equations Theory

The dependent variables in the Brinkman equations are the Darcy velocity and the pressure. The flow in porous media is governed by a combination of the continuity equation and the momentum equation, which together form the Brinkman equations:

$$\frac{\partial}{\partial t}(\varepsilon_p \rho) + \nabla \cdot (\rho \mathbf{u}) = Q_m \quad (7-28)$$

$$\frac{\rho}{\varepsilon_p} \left(\frac{\partial \mathbf{u}}{\partial t} + (\mathbf{u} \cdot \nabla) \frac{\mathbf{u}}{\varepsilon_p} \right) = -\nabla p + \nabla \cdot \left[\frac{1}{\varepsilon_p} \left\{ \mu (\nabla \mathbf{u} + (\nabla \mathbf{u})^T) - \frac{2}{3} \mu (\nabla \cdot \mathbf{u}) \mathbf{I} \right\} \right] - \left(\kappa^{-1} \mu + \frac{Q_m}{\varepsilon_p^2} \right) \mathbf{u} + \mathbf{F} \quad (7-29)$$

In these equations:

- μ (SI unit: kg/(m·s)) is the dynamic viscosity of the fluid
- \mathbf{u} (SI unit: m/s) is the velocity vector
- ρ (SI unit: kg/m³) is the density of the fluid
- p (SI unit: Pa) is the pressure
- ε_p is the porosity
- κ (SI unit: m²) is the permeability of the porous medium, and
- Q_m (SI unit: kg/(m³·s)) is a mass source or sink

Influence of gravity and other volume forces can be accounted for via the force term \mathbf{F} (SI unit: kg/(m²·s²)).

When the **Neglect inertial term (Stokes flow)** check box is selected, the term $(\mathbf{u} \cdot \nabla)(\mathbf{u}/\varepsilon_p)$ on the left-hand side of Equation 7-29 is disabled.

The mass source, Q_m , accounts for mass deposit and mass creation within the domains. The mass exchange is assumed to occur at zero velocity.

The Forchheimer and Ergun drag options add a viscous force proportional to the square of the fluid velocity, $\mathbf{F} = -\rho\beta|\mathbf{u}|\mathbf{u}$, on the right-hand side of Equation 7-29; see [Permeability Models and Non-Darcian Flow](#) for details.

In case of a flow with variable density, Equation 7-28 and Equation 7-29 must be solved together with the equation of state that relates the density to the temperature and pressure (for instance the ideal gas law).

For incompressible flow, the density stays constant in any fluid particle, which can be expressed as

$$\frac{\partial}{\partial t}(\epsilon_p \rho) + \mathbf{u} \cdot \nabla \rho = 0$$

and the continuity equation (Equation 7-28) reduces to

$$\rho \nabla \cdot \mathbf{u} = Q_m$$

References for the Brinkman Equations Interface

1. D. Nield and A. Bejan, *Convection in Porous Media*, 3rd ed., Springer, 2006.
2. M. Le Bars and M.G. Worster, “Interfacial Conditions Between a Pure Fluid and a Porous Medium: Implications for Binary Alloy Solidification,” *J. Fluid Mech.*, vol. 550, pp. 149–173, 2006.

Theory for the Free and Porous Media Flow Interface

The [Free and Porous Media Flow Interface](#) uses the Navier-Stokes equations to describe the flow in open regions, and the Brinkman equations to describe the flow in porous regions.

The same fields, \mathbf{u} and p , are solved for in both the free flow domains and in the porous domains. This means that the pressure in the free fluid and the pressure in the pores is continuous over the interface between a free flow domain and a porous domain. It also means that continuity is enforced between the fluid velocity in the free flow and the Darcy velocity in the porous domain. This treatment is one of several possible models for the physics at the interface. Examples of other models can be found in [Ref. 1](#).

The continuity in \mathbf{u} and p implies a stress discontinuity at the interface between a free-flow domain and a porous domain. The difference corresponds to the stress absorbed by the rigid porous matrix, which is a consequence implicit in the formulations of the Navier-Stokes and Brinkman equations.

Reference for the Free and Porous Media Flow Interface

1. M.L. Bars and M.G. Worster, “Interfacial Conditions Between a Pure Fluid and a Porous Medium: Implications for Binary Alloy Solidification,” *J. Fluid Mech.*, vol. 550, pp. 149–173, 2006.

Rarefied Flow Interface

This chapter describes the physics interface available to model the flow of rarefied gases. The physics interface is found under the **Fluid Flow>Rarefied Flow** branch ([xxx](#)). See [Modeling Microfluidic Fluid Flows](#) to help select the physics interface to use.

- [The Slip Flow Interface](#)
- [Theory for the Slip Flow Interface](#)

The Slip Flow Interface

The **Slip Flow (slpf)** interface (☒☒☒), found under the **Rarefied Flow** branch (☒☒☒) when adding a physics interface, is used to model thermal and isothermal flows within the slip flow regime. In the slip flow regime, the Navier-Stokes equations can be used to model the flow of the gas, except within a thin layer of rarefied gas adjacent to the walls (known as the Knudsen layer). The effect of the Knudsen layer on the continuum part of the flow can be modeled by means of modified boundary conditions for the Navier-Stokes equations. Thermal effects are also important in this regime, with effects such as thermal creep or transpiration often playing a significant role. For this reason the Slip Flow interface includes the heat flow equations. Typically slip flow applies at Knudsen numbers between 0.01 and 0.1.

When this physics interface is added, these default nodes are also added to the **Model Builder: Fluid, External Slip Wall**, and **Initial Values**. Then, from the **Physics** toolbar, add other nodes that implement, for example, boundary conditions and volume forces. You can also right-click **Slip Flow** to select physics features from the context menu.

SETTINGS

The **Label** is the default physics interface name.

The **Name** is used primarily as a scope prefix for variables defined by the physics interface. Refer to such physics interface variables in expressions using the pattern `<name>.<variable_name>`. In order to distinguish between variables belonging to different physics interfaces, the `name` string must be unique. Only letters, numbers, and underscores (`_`) are permitted in the **Name** field. The first character must be a letter.

The default **Name** (for the first physics interface in the model) is `slpf`.

PHYSICAL MODEL

Select the **Neglect inertial term (Stokes flow)** check box to model flow at very low Reynolds numbers where the inertial term in the Navier-Stokes equations can be neglected. When this option is checked COMSOL Multiphysics solves the linear Stokes equations for the fluid flow. The *Stokes flow* or *creeping flow* regime frequently

applies in microfluidic devices, where the flow length scales are very small. Enter a **Reference pressure level** p_{ref} . The default value is 1 [atm].



If you have the Heat Transfer Module, an additional check box is available for the modeling of heat transfer in biological tissue. See the *Heat Transfer Module User's Guide* for information.


DEPENDENT VARIABLES

This physics interface defines these dependent variables (fields):

- **Temperature** T (SI unit: K)
- **Velocity field** u (SI unit: m/s)
- **Pressure** p (SI unit: Pa)

For each of the dependent variables, the name can be changed in the corresponding field, but the name of fields and dependent variables must be unique within a model.

ADVANCED SETTINGS

To display this section, click the **Show More Options** button () and select **Advanced Physics Options**. Normally these settings do not need to be changed. The **Default model** is **Fluid**.

Select the **Use pseudo time stepping for stationary equation form** check box to add pseudo time derivatives to the equation when the **Stationary equation** form is used. When selected, also choose a **CFL number expression** — **Automatic** (the default) or **Manual**. **Automatic** calculates the local CFL number (from the Courant–Friedrichs–Lewy condition) from a built-in expression. For **Manual** enter a **Local CFL number** CFL_{loc} .

By default the **Enable conversions between material and spatial frames** check box is selected.



In the *COMSOL Multiphysics Reference Manual* see [Table 2-4](#) for links to common sections and [Table 2-5](#) to common feature nodes. You can also search for information: press F1 to open the **Help** window or Ctrl+F1 to open the **Documentation** window.



- [Domain, Boundary, Edge, Point, and Pair Nodes for the Slip Flow Interface](#)

- [Theory for the Slip Flow Interface](#)

In the *COMSOL Multiphysics Reference Manual*:

- [Pseudo Time Stepping for Laminar Flow Models](#)
- [Handling Frames in Heat Transfer](#)



Slip Flow Benchmark: Application Library path
Microfluidics_Module/Rarefied_Flow/slip_flow_benchmark

Domain, Boundary, Edge, Point, and Pair Nodes for the Slip Flow Interface

The [Slip Flow Interface](#) has these domain, boundary, edge, point, and pair nodes available from the **Physics** ribbon toolbar (Windows users), **Physics** context menu (Mac or Linux users), or right-click to access the context menu (all users)..



In general, to add a node, go to the **Physics** toolbar, no matter what operating system you are using. Subnodes are available by clicking the parent node and selecting it from the **Attributes** menu.



For axisymmetric components, COMSOL Multiphysics takes the axial symmetry boundaries (at $r = 0$) into account and automatically adds an **Axial Symmetry** node to the component that is valid on boundaries that represent the symmetry axis.

These nodes are available and described in this section (listed in alphabetical order):

- [Continuity](#)
- [External Slip Wall](#)
- [Fluid](#)
- [Initial Values](#)
- [Interior Slip Wall](#)
- [Periodic Condition](#)
- [Slip Wall](#)
- [Symmetry](#)

HEAT TRANSFER IN FLUIDS SUBMENU

These nodes and one subnode are described for the Heat Transfer interface in the *COMSOL Multiphysics Reference Manual* (listed in alphabetical order):

- Boundary Heat Source
- Heat Flux
- Heat Source
- Solid
- Line Heat Source
- Outflow
- Thickness
- Point Heat Source
- Heat Flux
- Temperature
- Thermal Insulation
- Thin Layer
- Translational Motion

LAMINAR FLOW SUBMENU

These nodes are described for the Laminar Flow interface in this guide (listed in alphabetical order):

- Boundary Stress
- Inlet
- Line Mass Source
- Open Boundary
- Outlet
- Point Mass Source
- Pressure Point Constraint
- Volume Force
- Wall



In the *COMSOL Multiphysics Reference Manual* see [Table 2-4](#) for links to common sections and [Table 2-5](#) to common feature nodes. You can also search for information: press F1 to open the **Help** window or Ctrl+F1 to open the **Documentation** window.

Fluid

The **Fluid** node prescribes its domains to be a fluid by adding momentum and energy transport equations.

HEAT CONDUCTION, FLUID

The default uses the **Thermal conductivity** k (SI unit: W/(m·K)) **From material**. For **User defined**, select **Isotropic**, **Diagonal**, **Symmetric**, or **Anisotropic** based on the characteristics of the thermal conductivity and enter another value or expression in the field or matrix.



The thermal conductivity describes the relationship between the heat flux vector \mathbf{q} and the temperature gradient ∇T as in $\mathbf{q} = -k\nabla T$ which is Fourier's law of heat conduction. Enter this quantity as power per length and temperature.

THERMODYNAMICS, FLUID

The **Fluid type** defaults to **Gas/Liquid**.

By default the **Density** ρ (SI unit: kg/m³), **Heat capacity at constant pressure** C_p (SI unit: J/(kg·K)), and **Ratio of specific heats** γ (dimensionless) take values **From material**. For **User defined** to enter other values or expressions.

DYNAMIC VISCOSITY

The default **Dynamic viscosity** μ (SI unit: Pa·s) is taken **From material** or select **User defined**.

External Slip Wall

Use the **External Slip Wall** node to specify a wall with slip when the adjacent wall is external to the whole geometry. The wall temperature, wall velocity, and slip coefficients are specified.

SLIP WALL

Enter the components for the **Velocity of moving wall** \mathbf{u}_w .

Enter a value or expression for the **Wall temperature** T_w . The default is 293.15 K.

Select the **Slip coefficients**: **Maxwell's model** (the default) or **User defined**.

Maxwell's Model

For **Maxwell's Model** enter values or expressions for the **Tangential momentum accommodation coefficient** a_v . The tangential accommodation coefficients are typically in the range of 0.85 to 1.0 and can be found in [Ref. 4](#).

User defined

For **User defined** select a **Mean free path definition** — **Standard** (the default) or **Alternative (Shapiro)**. Then enter values for the following. Note that the defaults are different based on the Mean free path definition chosen.

- **Thermal slip coefficient** σ_T . The defaults are 0.97 for **Standard** and 1.1 for **Alternative (Shapiro)**.
- **Viscous slip coefficient** σ_S . The defaults are 0.89 for **Standard** and 1 for **Alternative (Shapiro)**.
- **Temperature jump coefficient** ζ_T . The defaults are 1.73 for **Standard** and 1.95 for **Alternative (Shapiro)**.



Theoretical and experimental values of these coefficients for various gas surface combinations are available in [Ref. 5](#). Note that it is more convenient to use the **Alternative (Shapiro)** mean free path definition when using this data.

Initial Values

The **Initial Values** node adds initial values for the velocity field, pressure, and temperature. For the transient solver, these values define the state of the problem at the initial time step; for the stationary solver, they serve as a starting point for the nonlinear solver.

INITIAL VALUES

Enter values or expressions for the initial estimate the solver uses for the **Velocity field \mathbf{u}** , **Pressure p** , and **Temperature T** .

Slip Wall

Use the **Slip Wall** node to specify a wall with slip adjacent to a solid region in which the heat transfer equations are solved. A wall velocity can be specified along with the slip coefficients.

SLIP WALL

Enter the components for the **Velocity of moving wall \mathbf{u}_w** . Select the **Slip coefficients: Maxwell's model** (the default) or **User defined**. These settings are the same as for [External Slip Wall](#).

Periodic Condition

The **Periodic Condition** node applies periodic boundary conditions for the fluid flow and the heat transfer equations, as appropriate.

For more information, see [Periodic Boundary Conditions](#) in the *COMSOL Multiphysics Reference Manual*.

CONSTRAINT SETTINGS

To display this section, click the **Show More Options** button () and select **Advanced Physics Options**.

Symmetry

The **Symmetry** node applies symmetry conditions for the fluid flow and heat transfer equations, as appropriate.

CONSTRAINT SETTINGS

To display this section, click the **Show More Options** button () and select **Advanced Physics Options**.

Interior Slip Wall

Use the **Interior Slip Wall** adds a wall with slip on interior boundaries. It is similar to the [External Slip Wall](#) boundary condition available on exterior boundaries except that it applies on both sides of an interior boundary. It allows discontinuities of the dependent variables across the boundary.

SLIP WALL

Enter the components for the **Velocity of moving wall** \mathbf{u}_w .

Enter a value or expression for the **Wall temperature** T_w . The default is 293.15 K.

Select the **Slip coefficients: Maxwell's model** (the default) or **User defined**.

Maxwell's Model

For **Maxwell's Model** enter values or expressions for the **Tangential momentum accommodation coefficient** α_v . The tangential accommodation coefficients are typically in the range of 0.85 to 1.0 and can be found in [Ref. 4](#).

User defined

For **User defined** select a **Mean free path definition** — **Standard** (the default) or **Alternative (Shapiro)**. Then enter values for the following. Note that the defaults are different based on the Mean free path definition chosen.

- **Thermal slip coefficient** σ_T . The defaults are 0.97 for **Standard** and 1.1 for **Alternative (Shapiro)**.
- **Viscous slip coefficient** σ_S . The defaults are 0.89 for **Standard** and 1 for **Alternative (Shapiro)**.
- **Temperature jump coefficient** ζ_T . The defaults are 1.73 for **Standard** and 1.95 for **Alternative (Shapiro)**.



Theoretical and experimental values of these coefficients for various gas surface combinations are available in [Ref. 5](#). Note that it is more convenient to use the **Alternative (Shapiro)** mean free path definition when using this data.

Continuity

The **Continuity** node can be added to pairs. It prescribes that the temperature field is continuous across the pair. Continuity is only suitable for pairs where the boundaries match.

Since it is not usual to use an assembly to represent the fluid flow domains, **Continuity** is only appropriate between two domains in which **Heat Transfer in Solids** applies.

CONSTRAINT SETTINGS

To display this section, click the **Show More Options** button () and select **Advanced Physics Options**.

Theory for the Slip Flow Interface

The Slip Flow Interface theory is described in this section:

- Slip Flow Boundary Conditions
- References for the Slip Flow Interface



If you have the Heat Transfer Module, the **Thin Layer** node (and subnodes) is also available. The feature and the background theory is described in the *Heat Transfer Module User's Guide*.

Slip Flow Boundary Conditions

Maxwell was the first person to consider the boundary conditions required for the solution of the Boltzmann equation in the case of a slightly rarefied gas (Ref. 1). The boundary conditions he derived can be used as boundary conditions for the Navier Stokes equations in the slip flow regime, although Maxwell considered the particular case of a monatomic hard-sphere gas, so some generalization is required.

Maxwell's boundary condition takes the form:

$$\mathbf{u}_{\text{slip}} = \frac{G}{\mu}(\boldsymbol{\tau}\mathbf{n} - ((\mathbf{n}^T \boldsymbol{\tau} \mathbf{n})\mathbf{n})) + \frac{3}{4} \frac{\mu}{\rho T_g} [\nabla \cdot \mathbf{n} - \mathbf{n}(\mathbf{n} \cdot \nabla)] \left[T_g - \frac{8}{3} G(\mathbf{n} \cdot \nabla T_g) \right] \quad (8-1)$$

where \mathbf{u}_{slip} is the slip velocity, \mathbf{n} is the boundary normal, $\boldsymbol{\tau}$ is the viscous stress tensor, μ is the viscosity of the gas, ρ is its density, and T_g is its temperature. The factor G (which has dimensions of length) is given by:

$$G = \frac{2 - a_v}{a_v} \lambda$$

where λ is the mean free path and a_v is the tangential momentum accommodation coefficient (for a model in which the surface reflects some molecules diffusely and

some secularly, this is equivalent to the fraction of molecules which are reflected diffusely).



A slightly different definition of the *mean free path* is used here: in terms of Maxwell's original parameter, l , the mean free path is $\lambda = 2l/3$. In Maxwell's original paper, he uses a coordinate based notation, the vector notation is available in [Ref. 2](#).

In [Equation 8-1](#) the left-hand term represents the phenomena of viscous slip, whilst the right-hand term produces thermal slip or transpiration. Maxwell was aware that the temperature of the gas was not necessarily equal to that of the wall but formulated the boundary condition using only the gas temperatures. When the wall temperature is included, the following equations are obtained ([Ref. 2](#) and [Ref. 3](#)):

$$\mathbf{u}_{\text{slip}} = \sigma_s \frac{\lambda}{\mu} (\boldsymbol{\tau} \mathbf{n} - ((\mathbf{n}^T \boldsymbol{\tau} \mathbf{n}) \mathbf{n})) + \sigma_T \frac{\mu}{\rho T_g} [\nabla T_w - (\mathbf{n} \cdot \nabla T_w) \mathbf{n}]$$

$$T_w = T_g - \zeta_T \lambda \mathbf{n} \cdot \nabla T_g$$

where T_w is the wall temperature, σ_s is the viscous slip coefficient, σ_T is the thermal slip coefficient, and ζ_T is the temperature jump coefficient. Within a generalized Maxwell's model the three coefficients σ_s , σ_T , and ζ_T are given by:

$$\sigma_s = \frac{2 - a_v}{a_v}$$

$$\sigma_T = \frac{3}{4}$$

$$\zeta_T = \frac{2 - a_v}{a_v} \frac{2\gamma}{\gamma + 1} \frac{\kappa}{\mu C_p}$$
(8-2)

where κ is the thermal conductivity of the gas. The mean free path can be computed from the gas properties using the following equation ([Ref. 3](#)):

$$\lambda = \frac{2\mu}{\rho \langle c \rangle}$$

$$\langle c \rangle = \left(\frac{8RT}{\pi M_n} \right)^{1/2} = \left(\frac{8p}{\pi \rho} \right)^{1/2}$$
(8-3)

consequently:

$$\lambda = \sqrt{\frac{\pi}{2\rho p}}\mu$$

In some cases an alternative definition of the mean free path, λ' , is used (as, for example, in [Ref. 5](#)):

$$\lambda' = \frac{\sqrt{\pi}}{2}\lambda$$

It is possible to use this definition of the mean free path when entering user defined values for the slip coefficients.



Values of the parameters given in [Equation 8-2](#), are available in [Ref. 5](#), although care should be taken with the slip and temperature jump coefficients to adjust for differences between the author's definition of the mean free path and that used in COMSOL Multiphysics.

Also note that the formulation assumes that the ideal gas laws apply. This assumption is implicit in the derivation of the above equations ([Ref. 3](#)) and at the level of approximation of the equations is reasonable.




For mixtures of gases in which concentration gradients exist an additional term should be added to the slip on the wall. At present this feature is not implemented in COMSOL.

References for the Slip Flow Interface

1. J.C. Maxwell, "On Stresses in Rarefied Gases Arising from Inequalities of Temperature", *Phil. Trans. R. Soc. Lond.*, vol. 170, pp. 231–256, 1879.
2. D.A. Lockerby, J. M. Reese, D.R. Emerson, and R.W. Barber, "Velocity Boundary Condition at Solid Walls in Rarefied Gas Calculations", *Phys. Rev. E*, vol. 70, 017303, 2004.
3. E.H. Kennard, *Kinetic Theory of Gases*, McGraw-Hill, New York, 1938.
4. G. Kariadakis, A. Beskok, and N. Aluru, *Microflows and Nanoflows*, Springer Science and Business Media, 2005.

5. F. Sharipov, “Data on the Velocity Slip and Temperature Jump on a Gas-Solid Interface”, *J. Phys. Chem. Ref. Data*, vol. 40, no. 2, 023101, 2011.



Chemical Species Transport Interfaces

The Microfluidics Module has an enhanced version of the Transport of Diluted Species interface that is available with the basic COMSOL Multiphysics® license. In addition, the Transport of Diluted Species in Porous Media interface is available. Both physics interfaces are found under the **Chemical Species Transport** branch ().

In this chapter:

- [The Transport of Diluted Species Interface](#)
- [The Transport of Diluted Species in Porous Media Interface](#)
- [Theory for the Transport of Diluted Species Interface](#)

The Transport of Diluted Species Interface

The **Transport of Diluted Species (tds)** interface () , found under the **Chemical Species Transport** branch () , is used to calculate the concentration field of a dilute solute in a solvent. Transport and reactions of the species dissolved in a gas, liquid, or solid can be handled with this interface. The driving forces for transport can be diffusion by Fick's law, convection when coupled to a flow field, and migration, when coupled to an electric field.

The interface supports simulation of transport by convection and diffusion in 1D, 2D, and 3D as well as for axisymmetric components in 1D and 2D. The dependent variable is the molar concentration, c . Modeling multiple species transport is possible, whereby the physics interface solves for the molar concentration, c_i , of each species i .

SETTINGS

The **Label** is the default physics interface name.

The **Name** is used primarily as a scope prefix for variables defined by the physics interface. Refer to such physics interface variables in expressions using the pattern `<name>.<variable_name>`. In order to distinguish between variables belonging to different physics interfaces, the `name` string must be unique. Only letters, numbers, and underscores (`_`) are permitted in the **Name** field. The first character must be a letter.

The default **Name** (for the first physics interface in the model) is `tds`.

DOMAIN SELECTION

If any part of the model geometry should not partake in the mass transfer model, remove that part from the selection list.

TRANSPORT MECHANISMS

Mass transport due to diffusion is always included. Use the check boxes available under **Additional transport mechanisms** to control other transport mechanisms.

Note: Some of the additional transport mechanisms listed below are only available in certain products. For details see <https://www.comsol.com/products/specifications/>.

- By default, the **Convection** check box is selected. Clear the check box to disable convective transport.
- Select the **Migration in electric field** check box to activate transport of ionic species in an electric field. See further the theory section [Adding Transport Through Migration](#).



Transport of ionic species in an electric field is available in a limited set of add-on products. See <https://www.comsol.com/products/specifications/> for more details on availability.

Mass Transport in Porous Media

The **Mass transport in porous media** check box activates functionality specific to species transport in porous media. When selected, the following transport mechanisms are available:

- Select the **Dispersion in porous media** check box to activate the dispersion mechanism in porous media. See further [Dispersion](#) in the theory chapter.
- Select the **Volatilization in partially saturated porous media** check box to model volatilization in partially saturated domains. For more information see [Theory for the Transport of Diluted Species Interface](#).

The following features are also enabled when selecting the **Mass transport in porous media** check box:

- [Adsorption](#)
- [Fracture](#)
- [Partially Saturated Porous Media](#)
- [Porous Electrode Coupling](#)
- [Porous Media Transport Properties](#)

- Reactive Pellet Bed
- Species Source




Note: Mass transport in porous media is only available in a limited set of add-on products. See <https://www.comsol.com/products/specifications/> for more details on availability.

CONSISTENT STABILIZATION


To display this sections, click the **Show** button () and select **Stabilization**.

- When the **Crosswind diffusion** check box is selected, a weak term that reduces spurious oscillations is added to the transport equation. The resulting equation system is always nonlinear. There are two options for the **Crosswind diffusion type**:
 - **Do Carmo and Galeão** — the default option. This type of crosswind diffusion reduces undershoots and overshoots to a minimum but can in rare cases give equation systems that are difficult to fully converge.
 - **Codina**. This option is less diffusive compared to the Do Carmo and Galeão option but can result in more undershoots and overshoots. It is also less effective for anisotropic meshes. The Codina option activates a text field for the **Lower gradient limit** g_{lim} . It defaults to $0.1 [mol/m^3] / tds.helem$, where $tds.helem$ is the local element size.
- For both consistent stabilization methods, select an **Equation residual**. **Approximate residual** is the default and means that derivatives of the diffusion tensor components are neglected. This setting is usually accurate enough and is computationally faster. If required, select **Full residual** instead.

INCONSISTENT STABILIZATION


To display this section, click the **Show** button () and select **Stabilization**. By default, the **Isotropic diffusion** check box is not selected, because this type of stabilization adds artificial diffusion and affects the accuracy of the original problem. However, this option can be used to get a good initial guess for underresolved problems.

ADVANCED SETTINGS

To display this section, click the **Show** button () and select **Advanced Physics Options**. Normally these settings do not need to be changed. Select a **Convective term** — **Nonconservative form** (the default) or **Conservative form**. The conservative formulation

should be used for compressible flow. See [Convective Term Formulation](#) for more information.

DISCRETIZATION

To display all settings available in this section, click the **Show** button () and select **Advanced Physics Options**.

The **Compute boundary fluxes** check box is activated by default so that COMSOL Multiphysics computes predefined accurate boundary flux variables. When this option is checked, the solver computes variables storing accurate boundary fluxes from each boundary into the adjacent domain.

If the check box is cleared, the COMSOL Multiphysics software instead computes the flux variables from the dependent variables using extrapolation, which is less accurate in postprocessing results but does not create extra dependent variables on the boundaries for the fluxes.

The flux variables affected in the interface are:

- $ndflux_c$ (where c is the dependent variable for the concentration). This is the normal diffusive flux and corresponds to the boundary flux when diffusion is the only contribution to the flux term.
- $ntflux_c$ (where c is the dependent variable for the concentration). This is the normal total flux and corresponds to the boundary flux plus additional transport terms, for example, the convective flux when you use the nonconservative form.

Also the **Apply smoothing to boundary fluxes** check box is available if the previous check box is checked. The smoothing can provide a more well-behaved flux value close to singularities.



For details about the boundary fluxes settings, see [Computing Accurate Fluxes](#) in the *COMSOL Multiphysics Reference Manual*.

The **Value type when using splitting of complex variables** setting should in most pure mass transfer problems be set to **Real**, which is the default. It makes sure that the dependent variable does not get affected by small imaginary contributions, which can occur, for example, when combining a Time Dependent or Stationary study with a frequency-domain study. For more information, see [Splitting Complex-Valued Variables](#) in the *COMSOL Multiphysics Reference Manual*.

DEPENDENT VARIABLES

The dependent variable name is the **Concentration** c by default. The names must be unique with respect to all other dependent variables in the component.

Add or remove species variables in the model and also change the names of the dependent variables that represent the species concentrations.

Enter the **Number of species**. Use the **Add concentration** () and **Remove concentration** () buttons as needed.

FURTHER READING





- [Theory for the Transport of Diluted Species Interface](#)
- [Numerical Stabilization](#) in the *COMSOL Multiphysics Reference Manual*.
- In the *COMSOL Multiphysics Reference Manual*, see [Table 2-4](#) for links to common sections and [Table 2-5](#) for common feature nodes. You can also search for information: press F1 to open the **Help** window or Ctrl+F1 to open the **Documentation** window.



- *Effective Diffusivity in Porous Materials*: Application Library path **COMSOL_Multiphysics/Diffusion/effective_diffusivity**
- *Micromixer*: Application Library path **COMSOL_Multiphysics/Fluid_Dynamics/micromixer**

The Transport of Diluted Species in Porous Media Interface

This interface (), found under the **Chemical Species Transport** branch (), is used to calculate the species concentration and transport in free and porous media. The interface is the same as the *Transport of Diluted Species* interface but it uses other defaults: The [Mass Transport in Porous Media](#) property is selected, and a [Porous Media Transport Properties](#) node is added by default. The interface includes reaction rate expressions and solute sources for modeling of species transport and reaction in porous media.

This interface is dedicated to modeling transport in porous media, including immobile and mobile phases, where the chemical species may be subjected to diffusion, convection, migration, dispersion, adsorption, and volatilization in porous media. It

supports cases where either the solid phase substrate is exclusively immobile, or when a gas-filling medium is also assumed to be immobile.

It applies to one or more diluted species or solutes that move primarily within a fluid that fills (saturated) or partially fills (unsaturated) the voids in a solid porous medium. The pore space not filled with fluid contains an immobile gas phase. Models including a combination of porous media types can be studied.

The main feature nodes are the **Porous Media Transport Properties** and **Partially Saturated Porous Media** nodes, which add the equations for the species concentrations and provide an interface for defining the properties of the porous media, as well as additional properties governing adsorption, volatilization, dispersion and diffusion, migration, and the velocity field to model convection.



The physics interface can be used for stationary and time-dependent analysis.

When this physics interface is added, these default nodes are also added to the **Model Builder** — **Porous Media Transport Properties, No Flux** (the default boundary condition), and **Initial Values**. Then, from the **Physics** toolbar, add other nodes that implement, for example, boundary conditions, reaction rate expressions, and species sources. You can also right-click **Transport of Diluted Species in Porous Media** to select physics features from the context menu.

SETTINGS

The rest of the settings are the same as [The Transport of Diluted Species Interface](#).

FURTHER READING

	<ul style="list-style-type: none">• Theory for the Transport of Diluted Species Interface• Domain, Boundary, and Pair Nodes for the Transport of Diluted Species Interface
	<ul style="list-style-type: none">• <i>Variably Saturated Flow and Transport — Sorbing Solute</i>: Application Library path Subsurface_Flow_Module/Solute_Transport/sorbing_solute Web link: https://www.comsol.com/model/variably-saturated-flow-and-transport-sorbing-solute-490

Domain, Boundary, and Pair Nodes for the Transport of Diluted Species Interface

The **Transport of Diluted Species Interface** has the following domain, boundary, and pair nodes, listed in alphabetical order, available from the **Physics** ribbon toolbar (Windows users), **Physics** context menu (Mac or Linux users), or by right-clicking to access the context menu (all users).



To add a node, go to the **Physics** toolbar, no matter what operating system you are using. Subnodes are available by clicking the parent node and selecting it from the **Attributes** menu.

- Adsorption
- Concentration
- Electrode Surface Coupling
- Equilibrium Reaction
- Fast Irreversible Surface Reaction
- Flux
- Flux Discontinuity
- Fracture
- Inflow
- Initial Values
- Line Mass Source
- Mass-Based Concentrations
- No Flux
- Open Boundary
- Outflow
- Partially Saturated Porous Media
- Partition Condition
- Periodic Condition
- Point Mass Source
- Porous Electrode Coupling
- Porous Media Transport Properties
- Reaction Coefficients
- Reactions
- Reactive Pellet Bed
- Species Source
- Surface Reactions
- Surface Equilibrium Reaction
- Symmetry
- Thin Diffusion Barrier
- Thin Impermeable Barrier
- Transport Properties
- Turbulent Mixing
- Volatilization

Some features require certain add-on modules. For details see <https://www.comsol.com/products/specifications/>



For axisymmetric components, COMSOL Multiphysics takes the axial symmetry boundaries (at $r = 0$) into account and automatically adds an **Axial Symmetry** node that is valid on boundaries representing the symmetry axis.



In the *COMSOL Multiphysics Reference Manual*, see [Table 2-4](#) for links to common sections and [Table 2-5](#) for common feature nodes. You can also search for information: press F1 to open the **Help** window or Ctrl+F1 to open the **Documentation** window.

Transport Properties

The settings in this node are dependent on the check boxes selected under [Transport Mechanisms](#) on the Settings window for the Transport of Diluted Species interface. It includes only the sections required by the activated transport mechanisms. It has all the equations defining transport of diluted species as well as inputs for the material properties.

When the **Convection** check box is selected, the [Turbulent Mixing](#) subnode is available from the context menu as well as from the **Physics** toolbar, **Attributes** menu.

MODEL INPUTS

The temperature model input is always available. Select the source of the **Temperature**. For **User defined**, enter a value or expression for the temperature in the input field. This input option is always available.

You can also select the temperature solved for by a Heat Transfer interface added to the model component. These physics interfaces are available for selection in the **Temperature** list.

CONVECTION

If transport by convection is active, the velocity field of the solvent needs to be specified. Select the source of the **Velocity field**. For **User defined**, enter values or expressions for the velocity components in the input fields. This input option is always available.

You can also select the velocity field solved for by a Fluid Flow interface added to the model component. These physics interfaces are available for selection in the **Velocity field** list.

DIFFUSION

Select an option from the **Material** list. This selection list can only be used if a material has been added in the Materials node and if that material has a diffusion coefficient defined. Else, you need to type in the diffusivity in the **User Defined** edit field.

Enter the **Diffusion coefficient** D_c for each species. This can be a scalar value for isotropic diffusion or a tensor describing anisotropic diffusion. Select the appropriate tensor type — **Isotropic**, **Diagonal**, **Symmetric**, or **Full** that describes the diffusion transport, and then enter the values in the corresponding element (one value for each species).

Note that multiple species, as well as Migration in Electric fields (described below) is only available for certain COMSOL Multiphysics add-on products. See details: <https://www.comsol.com/products/specifications/>.

MIGRATION IN ELECTRIC FIELD

This section is available when the **Migration in electric field** check box is selected. From the **Electric potential** list, select the source of the electric field.

- Enter a value or expression for the **Electric potential** V , which is **User defined**; this input option is always available.
- Select the electric potential solved by an AC/DC-based interface that has also been added to the model.
- Select the electric potential defined or solved by Electrochemistry interface that has been added to the component.



By default the **Mobility** is set to be calculated based on the species diffusivity and the temperature using the **Nernst-Einstein relation**. For **User defined**, and under **Mobility**, select the appropriate scalar or tensor type — **Isotropic**, **Diagonal**, **Symmetric**, or **Full** — and type in the value of expression of the mobility $u_{m,c}$.

Enter the **Charge number** z_c (dimensionless, but requires a plus or minus sign) for each species.

The temperature (if you are using mobilities based on the Nernst-Einstein relation) is taken from **Model Inputs** section.


Note that the migration in electric fields feature is only available in some COMSOL products. See details: <https://www.comsol.com/products/specifications/>.

EXAMPLE MODELS

	<ul style="list-style-type: none">• <i>Separation Through Dialysis</i>: Application Library path Chemical_Reaction_Engineering_Module/Mixing_and_Separation/dialysis Web link: https://www.comsol.com/model/separation-through-dialysis-258
	<ul style="list-style-type: none">• <i>Transport in an Electrokinetic Valve</i>: Application Library path Microfluidics_Module/Fluid_Flow/electrokinetic_valve Web link: https://www.comsol.com/model/electrokinetic-valve-603

Turbulent Mixing

Use this node to account for the turbulent mixing of the chemical species caused by the eddy diffusivity. This node should typically be used when the specified velocity field corresponds to a RANS solution.

	This feature is only available in a limited set of add-on products. See https://www.comsol.com/products/specifications/ for more details on availability.
---	---

The subnode can be added from the context menu (right-click the **Transport Properties** parent node), as well as from the **Physics** toolbar, **Attributes** menu, provided that **Convection** is selected as a transport mechanism.

TURBULENT MIXING PARAMETERS

Some physics interfaces provide the turbulent kinematic viscosity, and these appear as options in the **Turbulent kinematic viscosity** ν_T list. The list always contains the **User defined** option where any value or expression can be entered.

The default **Turbulent Schmidt number** Sc_T is 0.71 (dimensionless).

FURTHER READING

See the section [About Turbulent Mixing](#) in the *CFD Module User's Guide* (this link is available online or if you have the CFD Module documentation installed).

Initial Values

The **Initial Values** node specifies the initial values for the concentration of each species. These serve as an initial guess for a stationary solver or as initial conditions for a transient simulation.

DOMAIN SELECTION

If there are several types of domains with different initial values defined, it might be necessary to remove some domains from the selection. These are then defined in an additional **Initial Values** node.

INITIAL VALUES

Enter a value or expression for the initial value of the **Concentration** or concentrations, c_i . This also serves as a starting guess for stationary problems.

Mass-Based Concentrations

Use the **Mass-Based Concentrations** node to add postprocessing variables for mass-based concentrations (SI unit: kg/m^3) and mass fractions (dimensionless) for all species.

MIXTURE PROPERTIES

The default **Solvent density** ρ_{solvent} is taken **From material**. For **User defined**, enter a value or expression manually. Define the **Molar mass** of each species, which is needed to calculate the mass-based concentration.

Reactions

Use the **Reactions** node to account for the consumption or production of species through chemical reactions. Define the rate expressions as required.

DOMAIN SELECTION

From the **Selection** list, choose the domains on which to define rate expression or expressions that govern the source term in the transport equations.

Several reaction nodes can be used to account for different reactions in different parts for the modeling geometry.

REACTION RATES

Add a rate expression R (SI unit: $\text{mol}/(\text{m}^3 \cdot \text{s})$) for species i . Enter a value or expression in the field. Note that if you have the *Chemistry* interface available, provided with the

Chemical Reaction Engineering Module, the reaction rate expressions can be automatically generated and picked up using the drop-down menu. For an example, see the application *Fine Chemical Production in a Plate Reactor* as linked below.

REACTING VOLUME

This section is only available when the [Mass Transport in Porous Media](#) property is available and selected. See <https://www.comsol.com/products/specifications/> for more details on availability.

When specifying reaction rates for a species in porous media, the specified reaction rate may have the basis of the total volume, the pore volume, or the volume of a particular phase.

- For **Total volume**, the reaction expressions in $\text{mol}/(\text{m}^3 \cdot \text{s})$ are specified per unit volume of the model domain (multiplied by unity).
- For **Pore volume**, the reaction expressions in $\text{mol}/(\text{m}^3 \cdot \text{s})$ are specified per unit volume of total pore space. The reaction expressions will be multiplied by the domain porosity, ϵ_p . (ϵ_p equals unity for nonporous domains.)
- For **Liquid phase**, the reaction expressions in $\text{mol}/(\text{m}^3 \cdot \text{s})$ are specified per unit volume of liquid in the pore space. The expressions will be multiplied by the liquid volume fraction θ . (θ equals ϵ_p for Saturated Porous Media domains).
- For **Gas phase**, the expressions are multiplied by the gas volume fraction $a_v = \epsilon_p - \theta$. a_v equals 0 for Saturated Porous Media domains.

FURTHER READING

See the theory chapter on chemical species transport, starting with the section *Mass Balance Equation*.



- *Fine Chemical Production in a Plate Reactor*: Application Library path
Chemical_Reaction_Engineering_Module/Reactors_with_Mass_and_Heat_Transfer/plate_reactor
Web link:
<https://www.comsol.com/model/fine-chemical-production-in-a-plate-reactor-8589>

No Flux

This node is the default boundary condition on exterior boundaries. It should be used on boundaries across which there is no mass flux, typically solid walls where no surface reactions occur. The condition applied for each species corresponds to

$$-\mathbf{n} \cdot (-D\nabla c) = 0$$

where \mathbf{n} denotes the outward pointing normal of the boundary. When the mass transport includes migration of ionic species, the no flux condition is:

$$-\mathbf{n} \cdot (-D\nabla c - zu_m Fc\nabla\phi) = 0$$

CONVECTION

By default, the feature prescribes a vanishing flux due to diffusion and migration in an electric field. This is the appropriate no flux condition when the relative convective velocity at the boundary is zero. When the fluid velocity at the boundary is not equal to that of the boundary, it is often convenient to prescribe the total flux including the convection. To do this select **Include** in the **Convection** section.

When including the convection, the no flux condition prescribed is:

$$-\mathbf{n} \cdot (-D\nabla c + \mathbf{u}c) = 0$$

or

$$-\mathbf{n} \cdot (-D\nabla c - zu_m Fc\nabla\phi + \mathbf{u}c) = 0$$

when migration of ionic species is included.

Inflow

Use this node to specify all species concentrations at an inlet boundary.

If you want to specify the concentration of a subset of the partaking species, this can be done by using the [Concentration](#) node instead.

For the **Electroanalysis** interface, this node is available when you select the **Convection** check box on the physics interface **Settings** window.

CONCENTRATION


For the concentration of each species $c_{0,c}$ (SI unit: mol/m³), enter a value or expression.

BOUNDARY CONDITION TYPE

The option **Concentration constraint** constrains the concentration values on the boundary by the use of pointwise constraints.

The other option, **Flux (Danckwerts)** can be used when the concentration at the boundary is not known, or when it varies in a non-trivial manner. This may, for example, be useful when reactions with high reaction rates occur in the vicinity of the inlet. In this case the concentration far upstream of the boundary is instead prescribed. The **Flux (Danckwerts)** condition prescribes the total flux defined by the upstream concentration and the fluid velocity at the boundary.

CONSTRAINT SETTINGS

To display this section, click the **Show** button () and select **Advanced Physics Options**. You can find details about the different constraint settings in the section [Constraint Reaction Terms](#) in the *COMSOL Multiphysics Reference Manual*.

FURTHER READING

See the theory chapter in the section [Danckwerts Inflow Boundary Condition](#).

Outflow

Apply this condition at outlets boundaries where species should be transported out of the model domain by fluid motion or by an electric field (in the case of ions). It is assumed that convection and migration in an electric are the dominating transport mechanisms across the boundary, and therefore that the diffusive transport can be ignored, that is:

$$\mathbf{n} \cdot (-D\nabla c) = 0$$

Note that the **Convection** or the **Migration in electric field** transport mechanisms needs to be included for this node to be available.

Concentration


This condition node adds a boundary condition for the species concentration. For example, a $c = c_0$ condition specifies the concentration of species c .

CONCENTRATION

Individually specify the concentration for each species. Select the check box for the **Species** to specify the concentration, and then enter a value or expression in the

corresponding field. To use another boundary condition for a specific species, click to clear the check box for the concentration of that species.

CONSTRAINT SETTINGS

To display this section, click the **Show** button () and select **Advanced Physics Options**. You can find details about the different constraint settings in the section [Constraint Reaction Terms](#) in the *COMSOL Multiphysics Reference Manual*.

Flux

This node can be used to specify the species molar flux across a boundary. The flux can for example occur due to chemical reactions or a phase change at the boundary. The flux can also represent the transport to or from a surrounding environment currently not included model.

The prescribed flux of a species c is by default defined as

$$-\mathbf{n} \cdot (-D\nabla c) = J_0$$

where \mathbf{n} denotes the outward pointing normal of the boundary. When the mass transport includes migration of ionic species, the flux is defined as:

$$-\mathbf{n} \cdot (-D\nabla c - zu_m Fc\nabla\phi) = J_0$$

The flux prescribed, J_0 , can include any arbitrary user-specified expression. It can be constant or a function of a dependent variable or independent variable. Common examples are a flux dependent of the concentration, temperature, pressure or the electric potential ϕ .

CONVECTION

By default, the flux due to diffusion and migration in an electric field is prescribed. This is the appropriate flux condition when the relative velocity at the boundary is zero. When the fluid velocity is not equal to that of the boundary, it is often convenient to prescribe the total flux, including the convection. To do this select **Include** in the **Convection** section.

When including the convection, the prescribed flux is defined as:

$$-\mathbf{n} \cdot (-D\nabla c + \mathbf{u}c) = J_0$$

or

$$-\mathbf{n} \cdot (-D\nabla c - zu_m Fc\nabla\phi + \mathbf{u}c) = J_0$$

when migration of ionic species is included.

INWARD FLUX

Select the Species check box for the species for which to specify the flux, and enter a value or expression for the inward flux in the corresponding field. Use a minus sign when specifying a flux directed out of the system. To use another boundary condition for a specific species, click to clear the check box for that species.

External convection

Set **Flux type** to **External convection** to prescribe a flux to or from an exterior domain (not modeled) assumed to include convection. The exterior can for example include a forced convection to control the temperature or to increase the mass transport. In this case the prescribed mass flux corresponds to

$$J_0 = k_c(c_b - c)$$

where k_c is a mass transfer coefficient and c_b is the bulk concentration, the typical concentration far into the surrounding exterior domain.

Symmetry

The **Symmetry** node can be used to represent boundaries where the species concentration is symmetric, that is, where there is no mass flux across the boundary.

This boundary condition is identical to that of the [No Flux](#) node.

Flux Discontinuity

This node represents a discontinuity in the mass flux across an interior boundary:

$$-\mathbf{n} \cdot [(\mathbf{J} + \mathbf{u}c)_u - (\mathbf{J} + \mathbf{u}c)_d] = N_0 \quad \mathbf{J} = -D\nabla c - zu_m Fc\nabla\phi$$

where the value N_0 (SI unit: mol/(m²·s)) specifies the jump in total flux at the boundary. This can be used to model a boundary source, for example a surface reaction, adsorption or desorption.

FLUX DISCONTINUITY

In this section the jump in species flux (or surface source) is specified.

Select the Species check box for the species to specify and enter a value or expression for the material flux jump in the corresponding field. To use a different boundary condition for a specific species, click to clear the check box for the flux discontinuity of that species.

Partition Condition

The **Partition Condition** node can be used to prescribe the ratio between the concentration of a solute species in two different immiscible phases. It can for example be used on interior boundaries separating two liquid phases, a gas-liquid interface, or on a boundary separating a liquid phase and a solid or porous media. For a species concentration c_i , the ratio between the concentration on the up side and on the down side of the boundary ($c_{i,u}$ and $c_{i,d}$ respectively) is defined as

$$K_i = \frac{c_{i,u}}{c_{i,d}}$$

in terms of a partition coefficient K_i . The up and down side of the selected boundary is indicated in the Graphics window. The arrows point from the down side into the up side.



This feature is only available in a limited set of add-on products. See <https://www.comsol.com/products/specifications/> for more details on availability.

PARTITION COEFFICIENT

Select the **Reverse direction** check box to reverse the direction of the arrows on the selected boundaries, and the corresponding definition of the up and down side concentration.

Use the associated input fields to prescribe the partition coefficient K_i .

FURTHER READING

For an example of using a partition condition, see this application example:



Separation Through Dialysis: Application Library path
Chemical_Reaction_Engineering_Module/Mixing_and_Separation/dialysis

Periodic Condition

The **Periodic Condition** node can be used to define periodicity for the mass transport between two sets of boundaries. The node prescribes continuity in the concentration and the mass flux between the “source” and the “destination” side respectively. Note that these names are arbitrary and does not influence the direction in which mass is transported. It is dictated by mass transfer equations in the adjacent domains.

The node can be activated on more than two boundaries, in which case the feature tries to identify two separate surfaces that each consist of one or several connected boundaries.

For more complex geometries, it might be necessary to add the **Destination Selection** subnode, which is available from the context menu (right-click the parent node) as well as from the **Physics** toolbar, **Attributes** menu. With this subnode, the boundaries that constitute the source and destination surfaces can be manually specified.

FURTHER READING

For an example of using a periodic condition, see this application example:



The KdV Equation and Solitons: Application Library path
COMSOL_Multiphysics/Equation_Based/kdv_equation

Line Mass Source

The **Line Mass Source** feature models mass flow originating from a tube or line region with an infinitely small radius.



This feature is only available in a limited set of add-on products. See <https://www.comsol.com/products/specifications/> for more details on availability.

SELECTION

The **Line Mass Source** feature is available for all dimensions, but the applicable selection differs between the dimensions.

MODEL DIMENSION	APPLICABLE GEOMETRICAL ENTITY
2D	Points
2D Axisymmetry	Points not on the symmetry axis and the symmetry axis
3D	Edges

SPECIES SOURCE

Enter the source strength, $\dot{q}_{l,c}$, for each species (SI unit: mol/(m·s)). A positive value results in species injection from the line into the computational domain, and a negative value means that the species is removed from the computational domain.

Line sources located on a boundary affect the adjacent computational domains. This effect makes the physical strength of a line source located in a symmetry plane twice the given strength.

FURTHER READING

See the section [Mass Sources for Species Transport](#).

Point Mass Source

The **Point Mass Source** feature models mass flow originating from an infinitely small domain around a point.



This feature is only available in a limited set of add-on products. See <https://www.comsol.com/products/specifications/> for more details on availability.

SPECIES SOURCE

Enter the source strength, $\dot{q}_{p,c}$, for each species (SI unit: mol/s). A positive value results in species injection from the point into the computational domain, and a negative value means that the species is removed from the computational domain.

Point sources located on a boundary or on an edge affect the adjacent computational domains. This has the effect, for example, that the physical strength of a point source located in a symmetry plane is twice the given strength.

FURTHER READING

See the section [Mass Sources for Species Transport](#).

Open Boundary

Use this node to set up mass transport across boundaries where both convective inflow and outflow can occur. On the parts of the boundary where fluid flows into the domain, an exterior species concentration is prescribed. On the remaining parts, where fluid flows out of the domain, a condition equivalent to the **Outflow** node is instead prescribed.

The direction of the flow across the boundary is typically calculated by a fluid flow interface and is provided as a model input to the Transport of Diluted Species interface.



This feature is only available in a limited set of add-on products. See <https://www.comsol.com/products/specifications/> for more details on availability.

EXTERIOR CONCENTRATION

Enter a value or expression for the **Exterior concentration**.

Thin Diffusion Barrier

Use this boundary condition to model a thin layer through which mass is transported by diffusion only. The node is applicable on interior boundaries and can be used to avoid meshing thin structures.

THIN DIFFUSION BARRIER

Specify the **Layer thickness**, d_s , and input a **Diffusion coefficient**, $D_{s,c}$, for each of the species included.

Thin Impermeable Barrier

This feature models a thin mass transfer barrier. It is available on interior boundaries and introduces a discontinuity in the concentration across the boundary. On each side, a no-flux condition is prescribed for the mass transport implying that it acts as a barrier. The feature can be used to avoid meshing thin structures.

Solving a model involving coupled fluid flow and mass transfer, the Thin Impermeable Barrier feature can be combined with an Interior Wall feature in order to model a thin solid wall.

Equilibrium Reaction

Use this node to model a reaction where the kinetics is assumed so fast that the equilibrium condition is fulfilled at all times. The node solves for an additional degree of freedom (the reaction rate R_{eq}) to fulfill the equilibrium condition at all times in all space coordinates.

If the **Apply equilibrium condition on inflow boundaries** check box is selected, the specified inflow concentration values in all active **Inflow** boundary nodes for the physics interface are modified to comply with the equilibrium condition.



- A necessary requirement for this feature to be available is that two or more species are solved for by the interface.
- This feature is only available in a limited set of add-on products. See <https://www.comsol.com/products/specifications/> for more details on availability.

EQUILIBRIUM CONDITION

The list defaults to **Equilibrium constant** or select **User defined**. For either option, the **Apply equilibrium condition on inflow boundaries** check box is selected by default.

For **Equilibrium constant**, enter an **Equilibrium constant** K_{eq} (dimensionless). Also enter a value or expression for the **Unit activity concentration** C_{a0} (SI unit: mol/m³).

Selecting **Equilibrium constant** defines an equilibrium condition based on the stoichiometric coefficients, the species activities, and the law of mass action.

For **User defined**, enter an **Equilibrium expression** E_{eq} (dimensionless).

STOICHIOMETRIC COEFFICIENTS

Enter a value for the stoichiometric coefficient ν_c (dimensionless). The default is 0. Use negative values for reactants and positive values for products in the modeled reaction.

Species with a stoichiometric coefficient value of 0 are not affected by the **Equilibrium Reaction** node.

Surface Reactions

The **Surface Reactions** node can be used to account for the species boundary flux due to chemical reactions occurring on a surface (heterogeneous reactions). For a domain species participating in a surface reaction, the boundary flux corresponds to the reaction rate at the surface.

SURFACE REACTION RATE

Specify the surface reaction rate J_0 of each species resulting from the reactions. Note that if you have the Chemistry interface available, provided with the Chemical Reaction Engineering Module, the reaction rate expressions can be automatically generated and picked up using the drop-down menu.

FURTHER READING

For an example of using the Surface Reactions node, see this application example:



Chemical Vapor Deposition of GaAs: Application Library path
Chemical_Reaction_Engineering_Module/Reactors_with_Mass_and_Heat_Transfer/gaas_cvd

Surface Equilibrium Reaction

Use this node to model an equilibrium reaction on a boundary (surface). The settings for this node are similar to [Equilibrium Reaction](#). Note that a necessary requirement for this is feature to be available is that two or more species are solved for by the interface.



This feature is only available in a limited set of add-on products. See <https://www.comsol.com/products/specifications/> for more details on availability.

Fast Irreversible Surface Reaction

This boundary node defines an irreversible reaction where the kinetics is so fast that the only factor limiting the reaction rate is the transport of a species to the reacting surface.

The node will set the **Rate limiting species concentration to zero** at the boundary, and balance the fluxes of the species participating in the reaction and the current densities according to the Stoichiometric Coefficients settings.



This feature is only available in a limited set of add-on products. See <https://www.comsol.com/products/specifications/> for more details on availability.

Porous Electrode Coupling

Use this node to add a molar source in a domain that is coupled to one or multiple [Porous Electrode Reaction](#) nodes of an Electrochemistry Interface.

The molar source is calculated from the number of electrons, stoichiometric coefficients, and volumetric current densities of the coupled porous electrode reactions specified in the **Reaction Coefficients** subnodes.

In the Transport of Concentrated Species interface, the molar sources (or sinks) are multiplied by the species molar masses to obtain the corresponding mass sources.

Additional [Reaction Coefficients](#) subnodes are available from the context menu (right-click the parent node) as well as from the **Physics** toolbar, **Attributes** menu.

Note that if you are also modeling the momentum transport and expect a nonnegligible total mass source or sink, which is often the case in gas diffusion electrodes, you need to also add a corresponding Porous Electrode Coupling node in the Fluid Flow interface.



This feature is only available in a limited set of add-on products. See <https://www.comsol.com/products/specifications/> for more details on availability.

Reaction Coefficients

Add this node to the [Electrode Surface Coupling](#) and [Porous Electrode Coupling](#) features to define molar fluxes and sources based on electrode current densities in an **Electrochemistry** interface.

The molar flux or source is proportional to the stoichiometric coefficients and the current density according to Faraday's law.

Current densities from **Electrode Reaction** (i_{loc} , SI unit: A/m²) or **Porous Electrode Reaction** nodes (i_v , SI unit: A/m³) of any **Electrochemistry** interface in the model are available for selection as the **Coupled reaction**, and user-defined expressions are also supported.

Enter the **Number of participating electrons** n_m (dimensionless) and the **Stoichiometric coefficient** v_c (dimensionless) as explained in the theory section linked below.

Use multiple subnodes to couple to multiple reactions.

Electrode Surface Coupling

Use this node to define a flux boundary condition based on current densities of one or multiple **Electrode Reaction** nodes in an Electrochemistry interface.

The flux is proportional to the current densities and the stoichiometric coefficients according to Faraday's law as defined by summation over the **Reaction Coefficients** subnodes.

Note that if you are also modeling the momentum transport and expect a nonnegligible total mass flux over the boundary, which is often the case for gas diffusion electrodes, you need to also add a corresponding Electrode Surface Coupling node in the Fluid Flow interface.



This feature is only available in a limited set of add-on products. See <https://www.comsol.com/products/specifications/> for more details on availability.

Porous Media Transport Properties

Use this node to model the concentration of diluted species transported through interstices in porous media. A part from convection and diffusion, the node contains functionality to include species evolution through adsorption, dispersion, and reaction.



This feature is only available in a limited set of add-on products. See <https://www.comsol.com/products/specifications/> for more details on availability.

MODEL INPUTS

The temperature model input is always available. Select the source of the **Temperature**. For **User defined**, enter a value or expression for the temperature in the input field. This input option is always available.

You can also select the temperature solved for by a Heat Transfer interface added to the model component. These physics interfaces are available for selection in the **Temperature** list.

MATRIX PROPERTIES

Use the **Porous material** list to define a material specifying the matrix properties on the current selection. By default the **Domain material** is used.

Specify the **Porosity**, ε_p (dimensionless) of the porous matrix. This is by default taken **From material**. Select **User defined** to instead enter a different value.

CONVECTION

If transport by convection is active, the velocity field of the solvent needs to be specified. Select the source of the **Velocity field**. For **User defined**, enter values or expressions for the velocity components in the input fields. This input option is always available.

You can also select the velocity field solved for by a Fluid Flow interface added to the model component. These physics interfaces are available for selection in the **Velocity field** list.

DIFFUSION

Select a **Fluid material** (when available and applicable).

Specify the **Fluid diffusion coefficient** $D_{F,i}$ (SI unit: m^2/s). Enter a value or expression for each of the species in the corresponding input field. The default is $1 \cdot 10^{-9} \text{ m}^2/\text{s}$.

Select the **Effective diffusivity model**: **Millington and Quirk model** (the default), **Bruggeman model**, **Tortuosity model**, or **User defined**. For **Tortuosity model**, enter a value for the tortuosity $\tau_{F,i}$ (dimensionless). The default is 1.

MIGRATION IN ELECTRIC FIELD

This section is available when the **Migration in electric field** check box is selected. From the **Electric potential** list, select the source of the electric field.

- Enter a value or expression for the **Electric potential** V , which is **User defined**; this input option is always available.

- Select the electric potential solved by an AC/DC-based interface that has also been added to the model.
- Select the electric potential defined or solved by Electrochemistry interface that has been added to the component.

By default the **Mobility** is set to be calculated based on the species effective diffusivity and the temperature using the **Nernst-Einstein relation**. For **User defined**, and under **Mobility**, select the appropriate scalar or tensor type — **Isotropic**, **Diagonal**, **Symmetric**, or **Full** — and type in the value of expression of the effective mobility $u_{me,c}$.

Enter the **Charge number** z_c for each species.

DISPERSION

This section is available when the **Dispersion in porous media** check box is selected on the **Settings** window for the physics interface.

Select the **Specify dispersion for each species individually** check box to specify the dispersion tensor D_D (SI unit: m^2/s) for each species separately. The default is to use the same dispersion tensor D_D for all species.

Select an option from the **Dispersion tensor** list — **User defined** (the default) or **Dispersivity**. For **User defined**, use it to specify the dispersion components as user-defined constants or expressions. Select **Isotropic**, **Diagonal**, **Symmetric**, or **Full** based on the properties of the dispersion tensor.

Select **Dispersivity** when **Convection** has been added as the transport mechanism. Specify the dispersivities (SI unit: m) to define the dispersion tensor D_D (SI unit: m^2/s) together with the velocity field \mathbf{u} . Select an option from the **Dispersivity model** list: **Isotropic** (the default) or **Transverse isotropic** based on the properties of the porous media. For isotropic porous media, specify the longitudinal and transverse dispersivities. For transverse isotropic porous media, specify the longitudinal, horizontal transverse, and vertical transverse dispersivities.

Adsorption

Use this node to model adsorption of the fluid phase species onto the porous media surface. It is available as a subnode to the [Porous Media Transport Properties](#) and the [Partially Saturated Porous Media](#) nodes.



This feature is only available in a limited set of add-on products. See <https://www.comsol.com/products/specifications/> for more details on availability.

MATRIX PROPERTIES

Use the **Porous material** list to define a material specifying the matrix properties on the current selection. By default the **Domain material** is used.

The density of the porous media is needed when modeling adsorption to the surface of the porous matrix. By default **Density** ρ is defined from the domain material.

ADSORPTION

Select a **Sorption type** — **Langmuir** (the default), **Freundlich**, **Toth**, **BET**, or **User defined** to specify how to compute c_P , the amount of species sorbed to the solid phase (moles per unit dry weight of the solid):

- For **Langmuir**:

$$c_P = c_{P\max} \frac{K_L c}{1 + K_L c}, \quad K_P = \frac{\partial c_P}{\partial c} = \frac{K_L c_{P\max}}{(1 + K_L c)^2}$$

Enter a **Langmuir constant** $k_{L,c}$ (SI unit: m^3/mol) and an **Adsorption maximum** $c_{p,\max,c}$ (SI unit: mol/kg).

- For **Freundlich**:

$$c_P = K_F \left(\frac{c}{c_{\text{ref}}} \right)^N, \quad K_P = \frac{\partial c_P}{\partial c} = N \frac{c_P}{c}$$

Enter a **Freundlich constant** $k_{F,c}$ (SI unit: mol/kg), a **Freundlich exponent** $N_{F,c}$ (dimensionless), and a **Reference concentration** $c_{\text{ref},c}$ (SI unit: mol/m^3).

- For **Toth**:

$$c_P = c_{P\max} \frac{b_T c}{(1 + (b_T c)^{N_T})^{1/N_T}}$$

and

$$K_P = \frac{\partial c_P}{\partial c} = c_{P\max} b_T (1 + (b_T c)^{N_T})^{-\left(1 + \frac{1}{N_T}\right)}$$

Enter a **Toth constant** $b_{T,c}$ (SI unit: m^3/mol), a **Toth exponent** $N_{T,c}$ (dimensionless), and an **Adsorption maximum** $c_{p,\max,c}$ (SI unit: mol/kg).

- For **BET (Brunauer-Emmett-Teller)**:

$$c_P = \frac{K_B c_0 c}{(c_S - c) \left(1 + (K_B - 1) \frac{c}{c_S}\right)}$$

and

$$K_P = \frac{\partial c_P}{\partial c} = \frac{K_B c_0 c_S ((K_B - 1)c^2 + c_S^2)}{(c - c_S)^2 (c_S + (K_B - 1)c)^2}$$

Enter a **BET constant** $K_{B,c}$ (dimensionless), a **Monolayer adsorption capacity** $c_{0,c}$ (SI unit: mol/kg), and an **Saturation concentration** $c_{S,c}$ (SI unit: mol/m^3).

- For **User defined**:

$$c_P = f(c)$$

Enter an **Adsorption isotherm** $c_{P,c}$ (SI unit: mol/kg).

For more information, see [Adsorption](#) in the theory section.

FURTHER READING

See the theory chapter in the section [Mass Balance Equation for Transport of Diluted Species in Porous Media](#).

Partially Saturated Porous Media

Use this node to model the concentration of diluted species transported by a liquid through in partially filled porous media. The interstices of the porous media contains the liquid carrier phase and gas pockets. A part from convection and diffusion, the

node contains functionality to include species evolution through adsorption, dispersion, reaction, and volatilization.



This feature is only available in a limited set of add-on products. See <https://www.comsol.com/products/specifications/> for more details on availability.

MODEL INPUTS

The temperature model input is always available. Select the source of the **Temperature**. For **User defined**, enter a value or expression for the temperature in the input field. This input option is always available.

You can also select the temperature solved for by a Heat Transfer interface added to the model component. These physics interfaces are available for selection in the **Temperature** list.

MATRIX PROPERTIES

Use the **Porous material** list to define a material specifying the matrix properties on the current selection. By default the **Domain material** is used.

Specify the **Porosity**, ε_p (dimensionless) of the porous matrix. This is by default taken **From material**. Select **User defined** to instead enter a different value.

SATURATION

Select **Saturation** or **Liquid volume fraction** from the list.

For **Saturation**, enter a value for s (dimensionless) between 0 and 1. The liquid volume fraction is then computed from the saturation and porosity as $\theta = s\varepsilon_p$.

For **Liquid volume fraction**, enter a value for θ (dimensionless) between 0 and the value of porosity. The saturation is then computed from the porosity and the liquid volume fraction as $s = \theta/\varepsilon_p$.

Select a **Fluid fraction time change**: **Fluid fraction constant in time** (the default), **Time change in fluid fraction**, or **Time change in pressure head**.

- For **Time change in fluid fraction**, enter $d\theta/dt$ (SI unit: 1/s).
- For **Time change in pressure head**, enter dH_p/dt (SI unit: m/s) and a **Specific moisture capacity** C_m (SI unit: 1/m).

CONVECTION

If transport by convection is active, the velocity field of the solvent needs to be specified. Select the source of the **Velocity field**. For **User defined**, enter values or expressions for the velocity components in the input fields. This input option is always available.

You can also select the velocity field solved for by a Fluid Flow interface added to the model component. These physics interfaces are available for selection in the **Velocity field** list.

DIFFUSION

Select a **Liquid material** from the list.

Specify the **Liquid diffusion coefficient** $D_{L,c}$ (SI unit: m^2/s). Enter a value or expression for each of the species in the corresponding input field. The default is $1 \cdot 10^{-9} \text{ m}^2/\text{s}$.

Select the **Effective diffusivity model, liquid: Millington and Quirk model** (the default), **Bruggeman model**, **Tortuosity model**, or **User defined**. For **Tortuosity model**, enter a value for $\tau_{L,c}$ (dimensionless). The default is 1.

When the **Volatilization in partially saturated porous media** check box is selected on the **Settings** window for the physics interface, also define the **Gas material**, **Gas diffusion coefficient**, and **Effective diffusivity model, gas**.

MIGRATION IN ELECTRIC FIELD

This section is available when the **Migration in electric field** check box is selected. It is similar to that in **Porous Media Transport Properties** feature. Select the source of electric field from the **Electric potential** list. The default selection to **Mobility** is the **Nernst-Einstein relation**.

DISPERSION

This section is available when the **Dispersion in porous media** check box is selected on the **Settings** window for the physics interface. The settings are the same as for [Porous Media Transport Properties](#).

VOLATILIZATION

This section is available when the **Volatilization in partially saturated porous media** check box is selected on the **Settings** window for the physics interface.

Enter a value for the **Volatilization** $k_{G,c}$ (dimensionless) for each species.

Volatilization

This feature is available when the **Volatilization in partially saturated porous media** check box is selected on the **Settings** window for the physics interface.

Use this feature to model mass transfer at the boundary due to volatilization. The feature can be added on boundaries of a **Partially Saturated Porous Media** domain. In this case the porous media contains a liquid phase and a gas phase. The species dissolved in the liquid are assumed to be vaporized at the boundary, and transported into the surrounding bulk region due to convection and diffusion. The mass transfer at the boundary is defined as

$$-\mathbf{n} \cdot \mathbf{J}_c = -h_c(k_{G,c}c - c_{\text{Gatm},c})$$

where h_c is the mass transfer coefficient, $k_{G,c}$ the volatilization coefficient, and $c_{\text{Gatm},c}$ the concentration in the surrounding atmosphere.



This feature is only available in a limited set of add-on products. See <https://www.comsol.com/products/specifications/> for more details on availability.

VOLATILIZATION

Enter a **Mass transfer coefficient** h_c defining the transfer into the surrounding media. This can be given by boundary layer theory. When assuming that no convective flow is present in the surrounding, the mass transfer coefficient can be defined from the gas diffusion coefficient D_{Gc} and the thickness of the diffusion layer d_s in the manner of

$$h_c = \frac{D_{Gc}}{d_s}$$

Also give the atmospheric concentration for each species, $c_{\text{Gatm},c}$. The **Volatilization** coefficient $k_{G,c}$ for each species are taken from the adjacent **Partially Saturated Porous Media** domain.

Reactive Pellet Bed

Use this feature to model packed bed reactors with catalytic pellets. For details, see the section [Theory for the Reactive Pellet Bed](#). By default, subnodes for Reactions and are added.



This feature is only available in a limited set of add-on products. See <https://www.comsol.com/products/specifications/> for more details on availability.

BED PARAMETERS

Here you can specify the bed porosity, which is the void fraction in the packed bed structure. Select **From densities** to calculate the porosity from the bed density and the individual pellet density. Select **User defined** to specify the porosity directly.

PELLET SHAPE AND SIZE

The default shape is spherical. Cylinders, flakes, and user-defined shapes can also be selected. A uniform pellet size or a discrete size distribution can be selected. Select a **Pellet size distribution** — **Uniform size** (the default), **Two sizes**, **Three sizes**, **Four sizes**, or **Five sizes** to select up to five different particle sizes.

Depending on the shape selection, equivalent radii or volumes and surface areas will be required as input. If a size distribution is selected, the volume percentage of each size is required as input.

Note that different chemical reactions can be specified for each pellet size if a distribution is specified.

SURFACE SPECIES

In order to add surface species, click the **Add** button and enter the species name in the **Surface species** table. Added surface species are available inside all pellet types defined in the **Pellet Shape and Size** section, but not in the bulk fluid.

For each pellet type, specify the **Reactive specific surface area**, $S_{b, \text{reac}}$ (SI unit: 1/m), corresponding to the surface area, per volume, available for surface reactions.

PELLET PARAMETERS

Enter a **Pellet porosity** ϵ_{pe} (dimensionless) to specify the porosity of the pellet internals.

Select **Diffusion model** — **Millington and Quirk model** (the default), **Bruggeman model**, **Tortuosity model**, or **User defined** to describe the effective correction of the diffusion coefficient in the pellet. In the case of the **Tortuosity model**, a value for the tortuosity τ_{pe} within the pellet is required.

Enter also the **Diffusion coefficient** $D_{pe,c}$ (SI unit: m^2/s). If a **User defined** diffusion model is selected, an **Effective diffusion coefficient** $D_{peff,c}$ (SI unit: m^2/s) is entered. The default value is $1 \cdot 10^{-9} m^2/s$ in both cases.

PELLET-FLUID SURFACE

For the coupling of concentration between the pellet internals and the surrounding fluid, two **Coupling type** options are available:

- **Continuous concentration**, assuming that all resistance to mass transfer to/from the pellet is within the pellet and no resistance to pellet-fluid mass transfer is on the bulk fluid side. The concentration in the fluid will thus be equal to that in the pellet pore just at the pellet surface: $c_{pe,i} = c_i$. This constraint also automatically ensures flux continuity between the internal pellet domain and the free fluid domain through so-called reaction forces in the finite element formulation.
- **Film resistance (mass flux)**: The flux of mass across the pellet-fluid interface into the pellet is possibly rate determined on the bulk fluid side, by film resistance. The resistance is expressed in terms of a film mass transfer coefficient, $h_{D,i}$, such that:

$$N_{i,inward} = h_{D,i}(c_i - c_{pe,i}).$$

The **Film resistance (mass flux)** option computes the inward surface flux, $N_{i,inward} = h_{D,i}(c_i - c_{pe,i})$. $h_{D,i}$ is the mass transfer coefficient (SI unit: m/s) and is calculated with the default **Automatic** setting from a dimensionless **Sherwood number expression** or with **User defined** mass transfer coefficients.


The **Active specific surface area** (SI unit: m^{-1}) is required to couple the mass transfer between the pellets and the bed fluid. Select either the **Automatic** setting that calculates the specific surface area from the shape information given above. User defined is also available for explicit surface area specification.

The **Sherwood number expression** can be computed from three available expressions: **Frössling**, **Rosner**, and **Garner and Key**. The Frössling equation is the default and probably the most commonly used for packed spheres. All of these are based on the dimensionless Reynolds, Re , and Schmidt, Sc , numbers, which are computed from **Density** and **Dynamic viscosity**. Select these to be taken either **From material** or choose the **User defined** alternative.

PELLET DISCRETIZATION

The extra dimension in the pellet needs to be discretized into elements. Select a **Distribution** — **Cubic root sequence** (the default), **Linear**, or **Square root sequence**. Enter the **Number of elements** N_{elem} .

CONSTRAINT SETTINGS

To display this section, click the **Show** button () and select **Advanced Physics Options**. See the details about the different constraint settings in the section [Constraint Reaction Terms](#).

FURTHER READING

[Theory for the Reactive Pellet Bed](#) in the Theory section of this manual.

For an application using the Reactive Pellet Bed feature, see



- *A Multiscale 3D Packed Bed Reactor*: Application Library path **Chemical_Reaction_Engineering_Module/Reactors_with_Porous_Catalysts/packed_bed_reactor_3d**

Web link:

<https://www.comsol.com/model/a-multiscale-3d-packed-bed-reactor-17019>

Reactions (Reactive Pellet Bed)

The Reactions subfeature to the [Reactive Pellet Bed](#) is used to define reaction terms to the transport within the reactive pellets. The feature also defines the corresponding averaged heat sources to be applied to heat transport in the bulk fluid.

DOMAIN SELECTION

From the **Selection** list, choose the domains on which to define rate expression or expressions that govern source terms in the transport equations.

Several reaction nodes can be used to account for different reactions in different parts for the modeling geometry.

REACTION RATES

Add a rate expression R (SI unit: $\text{mol}/(\text{m}^3 \cdot \text{s})$) for species i using a value or an expression. One reaction rate per species and pellet type can be entered.

Note that if you have the *Chemistry* interface available, provided with the *Chemical Reaction Engineering Module*, the reaction rate expressions can be automatically generated and picked up using the drop-down menu. For an example, see the application *Fine Chemical Production in a Plate Reactor*.

SURFACE REACTION RATES

The section is available when one or more surface species have been added in the **Surface Species** section of the Reactive Pellet Bed feature.

Specify the rate expression R (SI unit: mol/(m²·s)) corresponding to the surface reaction rate of each volumetric species i participating in the surface reaction. Furthermore, specify the surface reaction rates for the participating surface species in the corresponding table.

If several pellet types have been defined, one set of surface reaction rates per pellet type can be defined.

Note that if you have the *Chemistry* interface available, provided with the *Chemical Reaction Engineering Module*, the reaction rate expressions can be automatically generated and picked up using the drop-down menu.

HEAT SOURCE

Specify the heat source originating from the heat of reaction of the chemical reactions inside the pellet can be specified. Both heat sources from reactions in the fluid, and heat sources resulting from surface reactions can be defined. When using several pellet types, heat sources for each type can be added.

The heat sources are most conveniently picked up from a Chemistry feature that defines the reaction rate and the heat of reactions. In that case, the Rate expression can be selected from the drop-down menu. Else it can be set to User Defined.

The defined heat source can be used by a Heat Source feature in any of the heat transfer interfaces.

Species Source

In order to account for consumption or production of species in porous domains, the **Species Source** node adds source terms expressions S_i to the right-hand side of the species transport equations.

DOMAIN SELECTION


From the **Selection** list, choose the domains on which to define rate expression or expressions that govern the source term in the transport equations.

If there are several types of domains, with subsequent and different reactions occurring within them, it might be necessary to remove some domains from the selection. These are then defined in an additional **Species Source** node.

SPECIES SOURCE

Add a source term S_i (SI unit: mol/(m³.s)) for each of the species solved for. Enter a value or expression in the field of the corresponding species.

Hygroscopic Swelling

The **Hygroscopic Swelling** multiphysics coupling node () is used for moisture concentration coupling between the Solid Mechanics interface and either the Transport of Diluted Species or Transport of Diluted Species in Porous Media interfaces.

Hygroscopic swelling is an effect of internal strain caused by changes in moisture content. This volumetric strain can be written as

$$\varepsilon_{hs} = \beta_h M_m (c_{mo} - c_{mo,ref})$$

where β_h is the coefficient of hygroscopic swelling, M_m is the molar mass, c_{mo} is the moisture concentration, and $c_{mo,ref}$ is the strain-free reference concentration.

This feature requires a license of either the MEMS Module or the Structural Mechanics Module. The multiphysics feature will appear automatically if both the Transport of Diluted Species and the Solid Mechanics interfaces are added to the same component. For the most current information about licensing, please see See <https://www.comsol.com/products/specifications/>.

FURTHER READING

More information about how to use hygroscopic swelling can be found in [Hygroscopic Swelling Coupling](#) section in the *Structural Mechanics Module User's Guide*.

More information about multiphysics coupling nodes can be found in the section [The Multiphysics Branch](#).

Fracture

Use this node to model mass transport along thin fractures in porous media. The node assumes that the transport in the tangential direction along the fracture is dominant, as a result of lower flow resistance.



This feature is only available in a limited set of add-on products. See <https://www.comsol.com/products/specifications/> for more details on availability.

FRACTURE PROPERTIES

Specify a value for the **Fracture thickness** d_f .

MATRIX PROPERTIES

Use the **Porous material** list to define a material specifying the matrix properties on the current selection. By default the **Boundary material** is used.

Specify the **Porosity**, ε_p (dimensionless) of the porous matrix. This is by default taken **From material**. Select **User defined** to instead enter a different value.

CONVECTION

Select an option from the **Velocity field** list to specify the convective velocity along the fracture. For a consistent model, use a Fracture Flow feature in a Darcy's Law interface to compute the fluid flow velocity in the fracture.

For **User defined**, enter values or expressions for the velocity components in the table shown.



The settings for the **Diffusion**, and **Dispersion** sections are the same as for [Porous Media Transport Properties](#).

Theory for the Transport of Diluted Species Interface

The [Transport of Diluted Species Interface](#) provides a predefined modeling environment for studying the evolution of chemical species transported by diffusion and convection as well as migration due to an electric field. The physics interface assumes that all species present are dilute; that is, that their concentration is small compared to a solvent fluid or solid. As a rule of thumb, a mixture containing several species can be considered dilute when the concentration of the solvent is more than 90 mol%. Due to the dilution, mixture properties such as density and viscosity can be assumed to correspond to those of the solvent.

When studying mixtures that are not dilute, the mixture and transport properties depend on the composition, and a different physics interface is recommended. See [The Transport of Concentrated Species Interface](#) for more information.

Fick's law governs the diffusion of the solutes, dilute mixtures, or solutions, while the phenomenon of ionic migration is sometimes referred to as *electrokinetic flow*. The Transport of Diluted Species interface supports the simulations of chemical species transport by convection, migration, and diffusion in 1D, 2D, and 3D as well as for axisymmetric components in 1D and 2D.

In this section:

- [Adding Transport Through Migration](#)
- [Convective Term Formulation](#)
- [Crosswind Diffusion](#)
- [Danckwerts Inflow Boundary Condition](#)
- [Equilibrium Reaction Theory](#)
- [Mass Balance Equation](#)
- [Mass Sources for Species Transport](#)
- [Solving a Diffusion Equation Only](#)
- [Supporting Electrolytes](#)
- [References](#)

Note: Some features explained in this section require certain add-on modules. For details see <https://www.comsol.com/products/specifications/>

The section also includes the theory for [The Transport of Diluted Species in Porous Media Interface](#):

- Adsorption
- Convection in Porous Media
- Diffusion in Porous Media
- Dispersion
- Mass Balance Equation for Transport of Diluted Species in Porous Media
- Mass Transport in Fractures
- Reactions

Mass Balance Equation

The default node attributed to the Transport of Diluted Species interface models chemical species transport through diffusion and convection and solves the mass conservation equation for one or more chemical species i :

$$\frac{\partial c_i}{\partial t} + \nabla \cdot \mathbf{J}_i + \mathbf{u} \cdot \nabla c_i = R_i \quad (9-1)$$

[Equation 9-1](#) in its form above includes the transport mechanisms diffusion and convection. If *Migration in Electric Field* is activated (only available in some add-on products), the migration mechanism will be added to the equation as well. See more details in the section [Adding Transport Through Migration](#).

- c_i is the concentration of the species (SI unit: mol/m³)
- D_i denotes the diffusion coefficient (SI unit: m²/s)
- R_i is a reaction rate expression for the species (SI unit: mol/(m³·s))
- \mathbf{u} is the mass averaged velocity vector (SI unit: m/s)
- \mathbf{J}_i is the mass flux diffusive flux vector (SI unit: mol/(m²·s))

The mass flux relative to the mass averaged velocity, \mathbf{J}_i (SI unit: mol/(m²·s)), is associated with the mass balance equation above and used in boundary conditions and flux computations. The Transport of Diluted Species interface always includes mass transport due to molecular diffusion. In this case the mass flux \mathbf{J}_i defines the diffusive flux vector

$$\mathbf{J}_i = -D\nabla c \quad (9-2)$$

An input field for the diffusion coefficient is available.

When *Migration in Electric Fields* is activated, the migration term is also added to the diffusive flux vector as shown in the section [Adding Transport Through Migration](#).

The third term on the left side of [Equation 9-1](#) describes the convective transport due to a velocity field \mathbf{u} . This field can be expressed analytically or obtained from coupling the physics interface to one that solves for fluid flow, such as *Laminar Flow*. Note that all fluid flow interfaces solve for the mass averaged velocity.

On the right-hand side of the mass balance equation ([Equation 9-1](#)), R_i represents a source or sink term, typically due to a chemical reaction or desorption on a porous matrix. To specify R_i , another node must be added to the Transport of Diluted Species interface — the **Reaction** node for example, which includes an input field for specifying a reaction expression using the variable names of all participating species.

Equilibrium Reaction Theory

The feature Equilibrium Reaction is described in this section. A chemical equilibrium reaction system is defined by the stoichiometry of the reaction and the relation between the chemical activities of the chemical species participating in the reaction (the equilibrium condition).

The kinetics of the reaction is so fast that the equilibrium condition is fulfilled at all times in all space coordinates.

The equilibrium condition is commonly based on the stoichiometric coefficients, ν_i (dimensionless), of the reaction; the species activities of the reacting species α_i (dimensionless); and an equilibrium constant, K_{eq} (1) according to:

$$K_{\text{eq}} = \frac{\prod_{i \in \text{products}} \alpha_i^{\nu_i}}{\prod_{i \in \text{reactants}} \alpha_i^{-\nu_i}}$$

where the species activities are defined as

$$\alpha_i = \gamma_{c,i} \frac{c_i}{c_{a0}}$$

where c_{a0} (SI unit: mol/m³) is the standard molarity, and $\gamma_{c,i}$ (dimensionless) an activity coefficient.

Defining the stoichiometric coefficients positive for products and negative for reactants, the above equilibrium condition can also be written:

$$K_{\text{eq}} = \prod_i a_i^{v_i}$$

The **Equilibrium Reaction** node solves for a reaction rate so that the equilibrium condition is always fulfilled in the domain. It is available for the Modules Chemical Engineering, Corrosion, Electrochemistry, Electrodeposition, and Batteries and Fuel Cells



$\gamma_{e,i}$ is set to unity when the Equilibrium constant is selected on the Settings window. For nonunity activity coefficients, a user defined equilibrium condition can be used.

EQUILIBRIUM REACTIONS AND INFLOW BOUNDARY CONDITIONS

Contradictory constraints arise if the boundary conditions for concentrations or activities are set so that the domain equilibrium condition is not fulfilled. Special treatment is therefore needed at Inflow boundaries, where the concentrations are set for all species in the mass transport interfaces.

One way of avoiding competing constraints on an inflow boundary is to add an additional reaction coordinate degree of freedom, solved for to create a set of modified inflow concentrations that fulfill the domain equilibrium condition. The reaction coordinate gives rise to a concentration shift, which is the offset to the inflow concentrations provided by the user. The shift for each species obeys the stoichiometry of the reaction and the equilibrium expression. The modified inflow concentrations are then used in the boundary conditions for the domain mass transport equations. The resulting modified inflow concentrations can be seen as the stationary solution for a batch reactor with the user inflow concentrations as initial concentrations. In addition, the domain reaction rate degree of freedom of the equilibrium reaction is constrained to zero on all Inflow boundaries.

EQUILIBRIUM REACTIONS AND CONCENTRATION BOUNDARY CONDITIONS

No special treatment is made with regards to input concentration values of the Concentration boundary node. Using this feature, you can explicitly set one or a set of concentrations, and the equilibrium condition acts on the rest of the concentrations.

However, there is no solution to the problem if more concentrations than the number of species minus the number of equilibrium reactions are set using this feature.

EQUILIBRIUM REACTIONS AND TIME-DEPENDENT SIMULATIONS

Spurious oscillations may occur in a time-dependent problem if the initial conditions do not fulfill the equilibrium condition. Since equilibrium reactions are assumed to be infinitely fast, the solution is to initialize the problem using an additional study step, solving for a stationary problem with all nonequilibrium reaction rates set to zero. Manual scaling of the reaction rate dependent variables is needed in this study step.

Convective Term Formulation


The default node attributed to [The Transport of Diluted Species Interface](#) assumes chemical species transport through diffusion and convection (depending on the modules licensed, a check box to activate migration is available) and implements the mass balance equation in [Equation 9-1](#).

There are two ways to present a mass balance where chemical species transport occurs through diffusion and convection. These are the nonconservative and conservative formulations of the convective term:

$$\text{nonconservative: } \frac{\partial c}{\partial t} + \mathbf{u} \cdot \nabla c = \nabla \cdot \mathbf{J}_i + R \quad (9-3)$$

$$\text{conservative: } \frac{\partial c}{\partial t} + \nabla \cdot (c\mathbf{u}) = \nabla \cdot \mathbf{J}_i + R \quad (9-4)$$

and each is treated slightly differently by the solver algorithms. In these equations \mathbf{J}_i (SI unit: mol/(m²·s)) is the diffusive flux vector, R (SI unit: mol/(m³·s)) is a production or consumption rate expression, and \mathbf{u} (SI unit: m/s) is the solvent velocity field. The diffusion process can be anisotropic, in which case D is a tensor.

If the conservative formulation is expanded using the chain rule, then one of the terms from the convection part, $c\nabla \cdot \mathbf{u}$, would equal zero for an incompressible fluid and would result in the nonconservative formulation above. This is in fact the default formulation in this physics interface. To switch between the two formulations, click the **Show** button () and select **Advanced Physics Options**.

Solving a Diffusion Equation Only

Remove the convection term from Equation 9-3 and Equation 9-4 by clearing the Convection check box in the Transport Mechanisms section for The Transport of Diluted Species Interface. The equation then becomes

$$\frac{\partial c}{\partial t} = \nabla \cdot \mathbf{J}_i + R$$

Mass Sources for Species Transport

Note: The features below are only available in a limited set of add-on products. For a detailed overview of which features are available in each product, visit <https://www.comsol.com/products/specifications/>

There are two types of mass sources in the Transport of Diluted Species interface: point sources and line sources.

POINT SOURCE

A point source is theoretically formed by assuming a mass injection/ejection, \dot{Q}_c (SI unit: mol/(m³·s)), in a small volume δV and then letting the size of the volume tend to zero while keeping the total mass flux constant. Given a point source strength, $\dot{q}_{p,c}$ (SI unit: mol/s), this can be expressed as

$$\lim_{\delta V \rightarrow 0} \int_{\delta V} \dot{Q}_c = \dot{q}_{p,c} \quad (9-5)$$

An alternative way to form a point source is to assume that mass is injected/extracted through the surface of a small object. Letting the object surface area tend to zero while keeping the mass flux constant results in the same point source. For this alternative approach, effects resulting from the physical object's volume need to be neglected.

The weak contribution

$$\dot{q}_{p,c} \text{test}(c)$$

is added at a point in the geometry. As can be seen from Equation 9-5, \dot{Q}_c must tend to plus or minus infinity as δV tends to zero. This means that in theory the concentration also tends to plus or minus infinity.

Observe that “point” refers to the physical representation of the source. A point source can therefore only be added to points in 3D components and to points on the symmetry axis in 2D axisymmetry components. Other geometrical points in 2D components represent physical lines.

The finite element representation of Equation 9-5 corresponds to a finite concentration at a point with the effect of the point source spread out over a region around the point. The size of the region depends on the mesh and on the strength of the source. A finer mesh gives a smaller affected region but also a more extreme concentration value. It is important not to mesh too finely around a point source since this can result in unphysical concentration values. It can also have a negative effect on the condition number for the equation system.

LINE SOURCE

A line source can theoretically be formed by assuming a source of strength $\dot{Q}_{1,c}$ (SI unit: mol/(m³·s)), located within a tube with cross section δS and then letting δS tend to zero while keeping the total mass flux per unit length constant. Given a line source strength, $\dot{q}_{1,c}$ (SI unit: mol/(m·s)), this can be expressed as

$$\lim_{\delta S \rightarrow 0} \int_{\delta S} \dot{Q}_{1,c} = \dot{q}_{1,c} \quad (9-6)$$

As in the point source case, an alternative approach is to assume that mass is injected/extracted through the surface of a small object. This results in the same mass source, but requires that effects resulting from the physical object’s volume are neglected.

The weak contribution

$$\dot{q}_{1,c} \text{test}(c)$$

is added on lines in 3D or at points in 2D (which represent cut-through views of lines). Line sources can also be added on the axisymmetry line in 2D axisymmetry components. It cannot, however, be added on geometrical lines in 2D since those represent physical planes.

As with a point source, it is important not to mesh too finely around the line source.



For feature node information, see [Line Mass Source](#) and [Point Mass Source](#).

Note: Migration is only available in a limited set of add-on products. For a detailed overview of which features are available in each product, visit <https://www.comsol.com/products/specifications/>

In addition to transport due to convection and diffusion, the Transport of Diluted Species interface supports ionic species transport by *migration*. This is done by selecting the Migration in Electric Field check box under the Transport Mechanisms section for the physics interface. The mass balance then becomes:

$$\frac{\partial c_i}{\partial t} + \nabla \cdot (-D_i \nabla c_i - z_i u_{m,i} F c_i \nabla V + c_i \mathbf{u}) = R_i \quad (9-7)$$

where

- c_i (SI unit: mol/m³) denotes the concentration of species i
- D_i (SI unit: m²/s) is the diffusion coefficient of species i
- \mathbf{u} (SI unit: m/s) is the fluid velocity
- F (SI unit: A·s/mol) refers to Faraday's constant
- V (SI unit: V) denotes the electric potential
- z_i (dimensionless) is the charge number of the ionic species, and
- $u_{m,i}$ (SI unit: mol·s/kg) is its ionic mobility

In this case the diffusive flux vector is

$$\mathbf{J}_i = -D_i \nabla c_i - z_i u_{m,i} F c_i \nabla V$$

The velocity, \mathbf{u} , can be a computed fluid velocity field from a Fluid Flow interface or a specified function of the spatial variables x , y , and z . The potential can be provided by an expression or by coupling the system of equations to a current balance, such as the Electrostatics interface. Sometimes it is assumed to be a supporting electrolyte present, which simplifies the transport equations. In that case, the modeled charged species concentration is very low compared to other ions dissolved in the solution. Thus, the species concentration does not influence the solution's conductivity and the net charge within the fluid.

The Nernst-Einstein relation can in many cases be used for relating the species mobility to the species diffusivity according to

$$u_{m,i} = \frac{D_i}{RT}$$

where R (SI unit: J/(mol·K)) is the molar gas constant and T (SI unit: K) is the temperature.

Note: In the *Nernst-Planck Equations* interface, the ionic species contribute to the charge transfer in the solution. It includes an *electroneutrality condition* and also computes the electric potential field in the electrolyte. For more information, see [Theory for the Nernst-Planck Equations Interface](#). This interface is included in the Chemical Reaction Engineering Module.

Supporting Electrolytes

In *electrolyte* solutions, a salt can be added to provide a high electrolyte conductivity and decrease the ohmic losses in a cell. These solutions are often called *supporting electrolytes*, buffer solutions, or carrier electrolytes. The added species, a negative and a positive ion pair, predominates over all other species. Therefore, the supporting electrolyte species can be assumed to dominate the current transport in the solution. In addition, the predominant supporting ions are usually selected so that they do not react at the electrode surfaces since the high conductivity should be kept through the process, that is, they should not be electro-active species. This also means that the concentration gradients of the predominant species in a supporting electrolyte are usually negligible.

Modeling and solving for a supporting electrolyte in the *Electrostatics* or *Secondary Current Distribution* interfaces will give a potential distribution that drives the migration in the Transport of Diluted Species Interface.

The current density vector is proportional to the sum of all species fluxes as expressed by Faraday's law:

$$\mathbf{i} = F \sum_i z_i \mathbf{N}_i$$

The electroneutrality condition ensures that there is always a zero net charge at any position in a dilute solution. Intuitively, this means that it is impossible to create a current by manually pumping positive ions in one direction and negative ions in the other. Therefore, the convective term is canceled out to yield the following expression for the electrolyte current density, where j denotes the supporting species:

$$\mathbf{i} = F \sum_j -z_j^2 u_{m,j} F c_j \nabla \phi \quad (9-8)$$

Equation 9-8 is simply Ohm's law for ionic current transport and can be simplified to

$$\mathbf{i} = -\kappa \nabla \phi \quad (9-9)$$

where κ is the conductivity of the supporting electrolyte. A current balance gives the current and potential density in the cell

$$\nabla \cdot \mathbf{i} = 0$$

which, in combination with Equation 9-9, yields:

$$\nabla \cdot (-\kappa \nabla \phi) = 0 \quad (9-10)$$

Equation 9-10 can be easily solved using the Electrostatics or Secondary Current Distribution interface and, when coupled to the Transport in Diluted Species interface, the potential distribution shows up in the migration term.

Crosswind Diffusion

Transport of diluted species applications can often result in models with a very high cell Péclet number — that is, systems where convection or migration dominates over diffusion. Streamline diffusion and crosswind diffusion are of paramount importance to obtain physically reasonable results. The Transport of Diluted Species interface provides two crosswind diffusion options using different formulations. Observe that crosswind diffusion makes the equation system nonlinear even if the transport equation is linear.

DO CARMO AND GALEÃO

This is the formulation described in [Numerical Stabilization](#) in the *COMSOL Multiphysics Reference Manual*. The method reduces over- and undershoots to a minimum, even for anisotropic meshes.

In some cases, the resulting nonlinear equation system can be difficult to converge. This can happen when the cell Péclet number is very high and the model contains many thin layers, such as contact discontinuities. You then have three options:

- Refine the mesh, especially in regions with thin layers.
- Use a nonlinear solver with a constant damping factor less than one.
- Switch to the Codina crosswind formulation.

CODINA

The Codina formulation is described in [Ref. 1](#). It adds diffusion strictly in the direction orthogonal to the streamline direction. Compared to the do Carmo and Galeão formulation, the Codina formulation adds less diffusion but is not as efficient at reducing over- and undershoots. It also does not work as well for anisotropic meshes. The advantage is that the resulting nonlinear system is easier to converge and that underresolved gradients are less smeared out.

Danckwerts Inflow Boundary Condition

Constraining the composition to fixed values at an inlet to a reactor may sometimes result in issues with unreasonably high reaction rates or singularities at the inlet boundary. These problems may many times be mitigated by using a flux boundary condition instead, based on the upstream concentrations and the fluid velocity at the boundary. In chemical engineering, this type of flux boundary condition is also known as a Danckwerts condition.

Use the Danckwerts condition to specify inlet conditions for domains where high reaction rates are anticipated in the vicinity to the inlet ([Ref. 2](#)).

Given an upstream concentration $c_{i,0}$, the Danckwerts inflow boundary condition prescribed the total flux as

$$\mathbf{n} \cdot (\mathbf{J}_i + \mathbf{u}c_i) = \mathbf{n} \cdot (\mathbf{u}c_{i,0}) \quad (9-11)$$

VARIABLY SATURATED POROUS MEDIA

The following equations for the molar concentrations, c_i , describe the transport of solutes in a variably saturated porous medium for the most general case, when the pore space is primarily filled with liquid but also contain pockets or immobile gas:

$$\frac{\partial}{\partial t}(\theta c_i) + \frac{\partial}{\partial t}(\rho c_{P,i}) + \frac{\partial}{\partial t}(\alpha_v c_{G,i}) + \mathbf{u} \cdot \nabla c_i = \nabla \cdot [(D_{D,i} + D_{e,i})\nabla c_i] + R_i + S_i \quad (9-12)$$

On the left-hand side of Equation 9-12, the first three terms correspond to the accumulation of species within the liquid, solid, and gas phases, while the last term describes the convection due to the velocity field \mathbf{u} (SI unit: m/s).

In Equation 9-12 c_i denotes the concentration of species i in the liquid (SI unit: mol/m³), $c_{P,i}$ the amount adsorbed to solid particles (moles per unit dry weight of the solid), and $c_{G,i}$ the concentration of species i in the gas phase.

The equation balances the mass transport throughout the porous medium using the porosity ϵ_p , the liquid volume fraction θ ; the matrix (drained) density, $\rho = (1 - \epsilon_p)\rho_p$, and the solid phase density ρ_p .

For saturated porous media, the liquid volume fraction θ is equal to the porosity ϵ_p , but for partially saturated porous media, they are related by the saturation s as $\theta = s\epsilon_p$. The resulting gas volume fraction is $\alpha_v = \epsilon_p - \theta = (1-s)\epsilon_p$.

On the right-hand side of Equation 9-12, the first term introduces the spreading of species due to mechanical mixing resulting from the porous media (dispersion), as well as from diffusion and volatilization to the gas phase. The dispersion tensor is denoted D_D (SI unit: m²/s) and the effective diffusion by D_e (SI unit: m²/s).

The last two terms on the right-hand side of Equation 9-12 describe production or consumption of the species; R_i is a reaction rate expression which can account for reactions in the liquid, solid, or gas phase, and S_i is an arbitrary source term, for example due to a fluid flow source or sink.

Adsorption

The time evolution of the adsorption, the solute transport to or from the solid phase, is defined by assuming that the amount of solute adsorbed to the solid, $c_{P,i}$, is a function of the concentration in the fluid c_i . This implies that the solute concentration

in the liquid and solid phase are in instant equilibrium. The adsorption term can be expanded to give

$$\frac{\partial}{\partial t}(\rho c_{P,i}) = \rho \frac{\partial c_{P,i}}{\partial c_i} \frac{\partial c_i}{\partial t} - \rho c_{P,i} \frac{\partial \varepsilon_P}{\partial t} = \rho K_{P,i} \frac{\partial c_i}{\partial t} - \rho c_{P,i} \frac{\partial \varepsilon_P}{\partial t} \quad (9-13)$$

where $k_{P,i} = \partial c_{P,i} / \partial c_i$ is the adsorption isotherm.

Volatilization

Volatilization is the process where a solute species in the liquid is transported to the gas phase due to vaporization. Assuming that the amount of solute in the gas phase, $c_{G,i}$, is a linear function of the liquid phase concentration, the volatilization term is defined as

$$\frac{\partial}{\partial t} a_v c_{G,i} = a_v \frac{\partial c_{G,i}}{\partial c_i} \frac{\partial c_i}{\partial t} + k_{G,i} c_i \frac{\partial a_v}{\partial t} = a_v k_{G,i} \frac{\partial c_i}{\partial t} + k_{G,i} c_i \frac{\partial a_v}{\partial t} \quad (9-14)$$

where $k_{G,i} = \partial c_{G,i} / \partial c_i$ is the linear volatilization.

SATURATED POROUS MEDIA

In the case of transport in a saturated porous medium, $\theta = \varepsilon_P$, and the governing equations are

$$\frac{\partial}{\partial t}(\varepsilon_P c_i) + \frac{\partial}{\partial t}(\rho c_{P,i}) + \mathbf{u} \cdot \nabla c_i = \nabla \cdot [(D_{D,i} + D_{e,i}) \nabla c_i] + R_i + S_i \quad (9-15)$$

Convection in Porous Media

Convection (also called advection) describes the movement of a species, such as a pollutant, with the bulk fluid velocity. The velocity field \mathbf{u} corresponds to a superficial volume average over a unit volume of the porous medium, including both pores and matrix. This velocity is sometimes called *Darcy velocity*, and defined as volume flow rates per unit cross section of the medium. This definition makes the velocity field continuous across the boundaries between porous regions and regions with free flow.



The velocity field to be used in the Model Inputs section on the physics interface can, for example, be prescribed using the velocity field from a Darcy's Law or a Brinkman Equations interface.

The average linear fluid velocities \mathbf{u}_a , provides an estimate of the fluid velocity within the pores:

$$\mathbf{u}_a = \frac{\mathbf{u}}{\epsilon_p} \quad \text{Saturated}$$

$$\mathbf{u}_a = \frac{\mathbf{u}}{\theta} \quad \text{Partially saturated}$$

where ϵ_p is the porosity and $\theta = s\epsilon_p$ the liquid volume fraction, and s the saturation, a dimensionless number between 0 and 1.




Figure 9-1: A block of a porous medium consisting of solids and the pore space between the solid grains. The average linear velocity describes how fast the fluid moves within the pores. The Darcy velocity attributes this flow over the entire fluid-solid face.

CONVECTIVE TERM FORMULATION

The Transport of Diluted Species in Porous Media interface includes two formulations of the convective term. The conservative formulation of the species equations in [Equation 9-12](#) is written as:


$$\frac{\partial}{\partial t}(\theta c_i) + \frac{\partial}{\partial t}(\rho_b c_{P,i}) + \frac{\partial}{\partial t}(a_v c_{G,i}) + \nabla \cdot \mathbf{u} c_i = \nabla \cdot [(D_{D,i} + D_{e,i}) \nabla c_i] + R_i + S_i \quad (9-16)$$

If the conservative formulation is expanded using the chain rule, then one of the terms from the convection part, $c_i \nabla \cdot \mathbf{u}$, would equal zero for an incompressible fluid and would result in the nonconservative formulation described in [Equation 9-12](#).

When using the nonconservative formulation, which is the default, the fluid is assumed incompressible and divergence free: $\nabla \cdot \mathbf{u} = 0$. The nonconservative formulation

improves the stability of systems coupled to a momentum equation (fluid flow equation).



To switch between the two formulations, click the **Show** button () and select **Advanced Physics Options**. In the section **Advanced Settings** select either **Nonconservative form** (the default) or **Conservative form**. The conservative formulation should be used for compressible flow.

Diffusion in Porous Media

The effective diffusion in porous media, D_e , depends on the structure of the porous material and the phases involved. Depending on the transport of diluted species occurs in free flow, saturated or partially saturated porous media, the effective diffusivity is defined as:

$$D_e = D_F \quad \text{Free Flow}$$

$$D_e = \frac{\epsilon_p}{\tau_L} D_L \quad \text{Saturated Porous Media}$$

$$D_e = \frac{\theta}{\tau_L} D_L \quad \text{Partially Saturated Porous Media}$$

$$D_e = \frac{\theta}{\tau_L} D_L + \frac{\alpha_v}{\tau_G} k_G D_G \quad \text{Partially Saturated with Volatilization}$$

Here D_F , D_L , and D_G are the single-phase diffusion coefficients for the species diluted in fluid, pure liquid, and gas phases, respectively (SI unit: m^2/s), and τ_F , τ_L , and τ_G are the corresponding tortuosity factors (dimensionless).

The tortuosity factor accounts for the reduced diffusivity due to the fact that the solid grains impede Brownian motion. The interface provides predefined expressions to compute the tortuosity factors in partially saturated porous media according to the Millington and Quirk model (Ref. 12):

$$\tau_L = \theta^{-7/3} \epsilon^2, \quad \tau_G = \alpha_v^{-7/3} \epsilon^2$$

and Bruggeman model

$$\tau_L = \theta^{-5/2} \epsilon^2, \quad \tau_G = \alpha_v^{-5/2} \epsilon^2$$

For saturated porous media $\theta = \varepsilon_p$. The fluid tortuosity for the Millington and Quirk model is

$$\tau_L = \varepsilon_p^{-1/3}$$

and for the Bruggeman model the tortuosity is defined as

$$\tau_L = \varepsilon_p^{-1/2}$$

User defined expressions for the tortuosity factor can also be applied.

Dispersion

The contribution of dispersion to the mixing of species typically overshadows the contribution from molecular diffusion, except when the fluid velocity is very small.

The spreading of mass, as species travel through a porous medium is caused by several contributing effects. Local variations in fluid velocity lead to mechanical mixing referred to as dispersion occurs because the fluid in the pore space flows around solid particles, so the velocity field varies within pore channels. The spreading in the direction parallel to the flow, or *longitudinal dispersivity*, typically exceeds the *transverse dispersivity* from up to an order of magnitude. Being driven by the concentration gradient alone, molecular diffusion is small relative to the mechanical dispersion, except at very low fluid velocities.

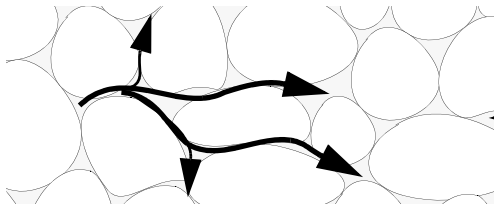


Figure 9-2: Spreading of fluid around solid particles in a porous medium.

is controlled through the dispersion tensor D_D . The tensor components can either be given by user-defined values or expressions, or derived from the directional dispersivities.

Using the longitudinal and transverse dispersivities in 2D, the dispersivity tensor components are (Ref. 9):

$$D_{Dii} = \alpha_L \frac{u_i^2}{|\mathbf{u}|} + \alpha_T \frac{u_j^2}{|\mathbf{u}|}$$

$$D_{Dij} = D_{Dji} = (\alpha_L - \alpha_T) \frac{u_i u_j}{|\mathbf{u}|}$$

In these equations, D_{Dii} (SI unit: m^2/s) are the principal components of the dispersivity tensor, and D_{Dji} and D_{Dij} are the cross terms. The parameters α_L and α_T (SI unit: m) specify the longitudinal and transverse dispersivities; and u_i (SI unit: m/s) stands for the velocity field components.

In order to facilitate modeling of stratified porous media in 3D, the tensor formulation by Burnett and Frind (Ref. 10) can be used. Consider a transverse isotropic media, where the strata are piled up in the z direction, the dispersivity tensor components are:

$$\begin{aligned} D_{Lxx} &= \alpha_1 \frac{u^2}{|\mathbf{u}|} + \alpha_2 \frac{v^2}{|\mathbf{u}|} + \alpha_3 \frac{w^2}{|\mathbf{u}|} \\ D_{Lyy} &= \alpha_1 \frac{v^2}{|\mathbf{u}|} + \alpha_2 \frac{u^2}{|\mathbf{u}|} + \alpha_3 \frac{w^2}{|\mathbf{u}|} \\ D_{Lzz} &= \alpha_1 \frac{w^2}{|\mathbf{u}|} + \alpha_3 \frac{u^2}{|\mathbf{u}|} + \alpha_2 \frac{v^2}{|\mathbf{u}|} \\ D_{Lxy} &= D_{Lyx} = (\alpha_1 - \alpha_2) \frac{uv}{|\mathbf{u}|} \\ D_{Lxz} &= D_{Lzx} = (\alpha_1 - \alpha_3) \frac{uw}{|\mathbf{u}|} \\ D_{Lyz} &= D_{Lzy} = (\alpha_1 - \alpha_3) \frac{vw}{|\mathbf{u}|} \end{aligned} \quad (9-17)$$

In Equation 9-17 the fluid velocities u , v , and w correspond to the components of the velocity field \mathbf{u} in the x , y , and z directions, respectively, and α_1 (SI unit: m) is the longitudinal dispersivity. If z is the vertical axis, α_2 and α_3 are the dispersivities in the transverse horizontal and transverse vertical directions, respectively (SI unit: m). Setting $\alpha_2 = \alpha_3$ gives the expressions for isotropic media shown in Bear (Ref. 9 and Ref. 11).

Adsorption

As species travel through a porous medium they typically attach to (adsorb), and detach (desorb) from the solid phase, which slows chemical transport through the porous medium. Adsorption and desorption respectively reduces or increases species

concentrations in the fluid. The adsorption properties vary between chemicals, so a plume containing multiple species can separate into components (Ref. 6). The Adsorption feature includes four predefined and one user defined relationships to predict the solid concentrations, c_{P_i} from the concentration in the liquid phase, c_i :

$$\begin{aligned}
 c_P &= c_{P_{\max}} \frac{K_L c}{1 + K_L c} && \text{Langmuir} \\
 c_P &= K_F \left(\frac{c}{c_{\text{ref}}} \right)^{N_F} && \text{Freundlich} \\
 c_P &= c_{P_{\max}} \frac{b_T c}{(1 + (b_T c)^{N_T})^{1/N_T}} && \text{Toth} \\
 c_P &= \frac{K_B c_0 c}{(c_S - c) \left(1 + (K_B - 1) \frac{c}{c_S} \right)} && \text{BET}
 \end{aligned} \tag{9-18}$$

The above equations contains the following parameters:

- Freundlich: Freundlich constant K_F (SI unit: mol/kg), Freundlich exponent N_F (dimensionless), and reference concentration c_{ref} (SI unit: mol/m³).
- Langmuir: Langmuir constant K_L (SI unit: m³/mol), and adsorption maximum $c_{P_{\max}}$ (SI unit: mol/kg).
- Toth: Toth constant b_T (SI unit: m³/mol), Toth exponent N_T (dimensionless), and adsorption maximum $c_{P_{\max}}$ (SI unit: mol/kg).
- BET (Braunauer-Emmett-Teller): BET constant K_B (dimensionless), and a monolayer adsorption capacity e_0 (SI unit: mol/kg) and a Saturation concentration, c_S (SI unit: mol/m³).

These predefined expressions are adsorption isotherms that describe the amount of species sorbed to the solid. Defined at equilibrium, the switch between liquid and solid phases is instantaneous.

Using a [Species Source](#) feature, arbitrary expressions can be entered to define, for example, nonequilibrium and temperature-dependent adsorption laws, including those set out by Fetter (Ref. 7) and Bear and Verruijt (Ref. 8).

The retardation factor, \mathbf{RF} , describes how adsorption slows the solute velocity, \mathbf{u}_c , relative to the average linear velocity of the fluid, \mathbf{u}_a , as in

$$\mathbf{RF} = 1 + \frac{\rho_b}{\theta} \frac{\partial c_p}{\partial c} = \frac{\mathbf{u}_a}{\mathbf{u}_c}$$

If the contaminant moves at the average linear velocity of the fluid for $\mathbf{RF} = 1$. For $\mathbf{RF} > 1$, the contaminant velocity is smaller than the fluid velocity owing to residence time on solids.

Reactions

Chemical reactions of all types influence species transport in porous media. Examples include biodegradation, radioactive decay, transformation to tracked products, temperature- and pressure-dependent functions, exothermic reactions, and endothermic reactions. The reactions represent change in species concentration per unit volume porous medium per time. Reaction terms are used on the right-hand side of the governing equation to represent these processes. For reactions in a fluid phase, multiply the expression by the fluid volume fraction θ . Similarly, solid phase reaction expressions include the bulk density, ρ_b , and gas phase reactions include the gas volume fraction, a_v .

The following expressions define some common types of reactions:

$$\begin{aligned} R_{Li} &= -\theta \frac{\ln 2}{\lambda_{Li}} c_i && \text{Radioactive decay — liquid} \\ R_{Pi} &= -\rho_b \frac{\ln 2}{\lambda_{Pi}} \left(\frac{\partial c_{Pi}}{\partial c_i} \right) c_i && \text{Radioactive decay — solid} \\ R_{Gi} &= -\frac{\ln 2}{\lambda_{Gi}} a_v \left(\frac{\partial c_{Gi}}{\partial c} \right) c_i && \text{Radioactive decay — gas} \\ R_{Lk} &= \theta \zeta_{Li} c_i && \text{Creation from parent } c_{Li} \text{ — liquid} \\ R_{Pk} &= \rho_b \zeta_{Pi} \left(\frac{\partial c_{Pi}}{\partial c_i} \right) c_i && \text{Creation from sorbed parent } c_{Pi} \text{ — solid} \\ R_{Gk} &= -\zeta a_v \left(\frac{\partial c_{Gi}}{\partial c} \right) c_i && \text{Reaction — gas} \end{aligned}$$

where λ is the chemical half life, ζ is a reaction rate, and the subscripts L , P , and G denote liquid, solid, and gas phases, respectively. In the equations, the reactions either depend on liquid concentration c_i or solid phase concentrations c_{Pi} obtained using the sorption derivative with c_i or gas phase concentration c_{Gi} depending on the gas volume fraction, the volatilization, and the liquid concentration.

Reaction rates can vary with results from other equations in your model, such as temperature. For example, enter the Arrhenius rate law given in [Ref. 13](#):

$$\zeta_T = \zeta_R \exp \left[\frac{E_a(T - T_R)}{R_u T T_R} \right] \quad (9-19)$$

In [Equation 9-19](#), T denotes the current absolute temperature, T_R denotes the reference absolute temperature, E_a is the activation energy, and R_u is the universal gas constant.

Mass Transport in Fractures

When thin fractures occur in porous media, fluid flow tends to move faster along the fracture than in the surrounding media. The transport of chemical species therefore also occur also faster in the direction of the fractures.

The fluid flow in a fracture can be modeled using Darcy's law formulated in a thin sheet of porous medium (a fracture):

$$\mathbf{u} = \frac{\kappa}{\mu} \nabla_t p$$

Here \mathbf{u} is the tangential Darcy velocity, κ is the fracture permeability, μ the fluid's dynamic viscosity, and $\nabla_t p$ is the tangential gradient of the fluid pressure.

The equation to solve for mass transport of species c_i in a thin fracture, embedded in a porous media, is derived from [Equation 9-12](#). The resulting equation is:

$$d_{fr} \left(\frac{\partial \rho_b c_{P,i}}{\partial t} + \frac{\partial \varepsilon_p c_i}{\partial t} + \nabla_t \cdot (D_{e,i} \nabla_t c_i) + \mathbf{u} \cdot \nabla_t c_i \right) = d_{fr} R_i + d_{fr} S_i + n_0 \quad (9-20)$$

Here d_{fr} is the fracture thickness, $c_{P,i}$ the amount of species adsorbed to (or desorbed from) the porous matrix (moles per unit dry weight of the solid), ε_p is the fracture porosity, and D_e is the effective diffusivity. The first two terms on the right hand side represent source terms from reactions, and n_0 corresponds to out-of plane flux from the adjacent porous domain.

In order to arrive at the tangential differential equation, the gradient is split into the contributions normal and tangential to the fracture:

$$\nabla c_i = \nabla_n c_i + \nabla_t c_i$$

The normal gradient is defined in the direction normal to the boundary representing the fracture and the tangential gradient is defined along the boundary. Assuming that the variations in the normal (thin) direction of the fracture are negligible compared to those in the tangential direction, the gradient is simplified as:

$$\nabla c_i = \nabla_t c_i$$

Using The Transport of Diluted Species in Fractures Interface, the transport along fracture boundaries alone is solved for. In this case the transport in the surrounding porous media neglected and the out-of plane flux n_0 vanishes.



See [Fracture](#) for more information about the boundary feature solving [Equation 9-20](#). See for more information about the physics interface solving the equation on boundaries only.

References

1. R. Codina, “A discontinuity-capturing crosswind-dissipation for the finite element solution of the convection-diffusion equation”, *Computer Methods in Applied Mechanics and Engineering*, vol. 110, pp. 325–342, 1993.
2. P.V. Danckwerts, “Continuous flow systems: Distribution of residence times”, *Chem. Eng. Sci.*, vol. 2, no. 1, 1953.
3. J.M. Coulson and J.F. Richardson, *Chemical Engineering*, vol. 2, 4th ed., Pergamon Press, Oxford, U.K., 1991.
4. J.M. Coulson and J.F. Richardson, *Chemical Engineering*, vol. 1, 4th ed., Pergamon Press, Oxford, U.K., 1991.
5. D.E Rosner, *Transport Processes in Chemically Reacting Flow Systems*, ISBN-13: 978-1483130262, Butterworth-Heinemann, 1986
6. D.M. Mackay, D.L. Freyberg, P.V. Roberts, and J.A. Cherry, “A Natural Gradient Experiment on Solute Transport in a Sand Aquifer: 1. Approach and Overview of Plume Movement”, *Water Resour. Res.*, vol. 22, no. 13, pp. 2017–2030, 1986.
7. C.W. Fetter, *Contaminant Hydrogeology*, Prentice Hall, 1999.
8. J. Bear and A. Verruijt, *Modeling Groundwater Flow and Pollution*, D. Reidel Publishing, 1994.
9. J. Bear, *Hydraulics of Groundwater*, McGraw-Hill, 1979.

10. R.D. Burnett and E.O. Frind, “An Alternating Direction Galerkin Technique for Simulation of Groundwater Contaminant Transport in Three Dimensions: 2. Dimensionality Effects”, *Water Resour. Res.*, vol. 23, no. 4, pp. 695–705, 1987.
11. J. Bear, *Dynamics of Fluids in Porous Media*, Elsevier Scientific Publishing, 1972.
12. R.J. Millington and J.M. Quirk, “Permeability of Porous Solids”, *Trans. Faraday Soc.*, vol. 57, pp. 1200–1207, 1961.
13. I. Langmuir, “Chemical Reactions at Low Temperatures”, *J. Amer. Chem. Soc.*, vol. 37, 1915.
14. R.B. Bird, W.E. Stewart, and E.N. Lightfoot, *Transport Phenomena*, 2nd ed., John Wiley & Sons, Inc., 2007.

Glossary

This [Glossary of Terms](#) contains finite element modeling terms specific to the Microfluidics Module and its applications. For mathematical terms as well as geometry and CAD terms specific to the COMSOL Multiphysics® software and its documentation, see the glossary in the *COMSOL Multiphysics Reference Manual*. To find references in the documentation set where you can find more information about a given term, see the index.

Glossary of Terms

absorption (gas) Uptake of a gas into the bulk of a liquid. Gas absorption takes place, for example, in the liquid of a scrubber tower where an up-streaming gas is washed by a down-going flow of a scrubber solution.

adsorption (molecule) Attachment of a molecule or atom to a solid surface. Adsorption involves a chemical bond between the adsorbed species and the surface.

ALE See *arbitrary Lagrangian-Eulerian method*.

arbitrary Lagrangian-Eulerian (ALE) method A technique to formulate equations in a mixed kinematical description. An ALE referential coordinate system is typically a mix between the material (Lagrangian) and spatial (Eulerian) coordinate systems.

biosensor A general term for sensor devices that either detect biological substances or use antibodies, enzymes, or other biological molecules in their operation. Biosensors are a subcategory of chemical sensors.

Bond number A dimensionless number given by the ratio of surface tension forces to body forces (usually gravity) for a two-phase flow. It is also known as the Eötvös number, E_o . At high Bond numbers surface tension has a minimal effect on the flow; at low Bond numbers, surface tension dominates. The Bond number, Bo , is given by:

$$Bo = \frac{\rho g L^2}{\sigma}$$

where ρ is the density, g is the body force acceleration, L is the characteristic length, and σ is the surface tension coefficient. The density can refer to a density difference when considering buoyancy.

Brinkman equations A set of equations extending Darcy's law in order to include the transport of momentum through shear in porous media flow.

capillary number A dimensionless number given by the ratio of viscous forces to surface tension for a two phase flow. At low capillary numbers flow in porous media is dominated by surface tension. The capillary number, Ca , is given by:

$$\text{Ca} = \frac{\mu v}{\sigma}$$

where μ is the viscosity, v is the characteristic velocity of the problem, and σ is the surface tension coefficient.

continuum flow Fluid flow which is well described by approximating the liquid as a continuum with the Navier-Stokes equations.

convection Transport of molecules or heat due to the movement of the surrounding medium.

creeping flow Models the Navier-Stokes equations without the contribution of the inertia term. This is often referred to as *Stokes flow* and is appropriate for use when viscous flow is dominant, such as in very small channels or microfluidic applications.

crosswind diffusion A numerical technique for stabilization of the numeric solution to a convection-dominated PDE by artificially adding diffusion perpendicular to the direction of the streamlines.

Darcy's Law Equation that gives the velocity vector as proportional to the pressure gradient. Often used to describe flow in porous media.

Debye layer See *electric double layer*.

dielectrophoresis (DEP) Migration of polarizable particles in an electrolyte in a nonuniform applied electric field.

diffusion Transport of material resulting from the random motion of molecules in the presence of a concentration gradient.

Dukhin number A dimensionless number given by the ratio of the surface conductivity contribution to the fluid bulk electrical conductivity contribution in electrokinetic phenomena. The Dukhin number, Du , is given by:

$$\text{Du} = \frac{K^{\sigma}}{K^B}$$

where K^{σ} is the surface conductivity and K^B is the bulk conductivity. For low Dukhin numbers, surface conductivities can be neglected when modeling electrokinetic flows.

electric double layer (EDL) Sometimes referred to as the Debye layer. At the contact of a solid and a polar fluid (such as water), the solid acquires an electric charge. This charge attracts ions within the fluid, and a narrow fluid layer of opposite charge, the Stern layer, forms on the boundary. In addition, adjacent to the Stern layer, a wider layer with the same charge as in the Stern layer forms in the fluid. Together, the Stern layer and the wider layer (called the diffuse or Gouy-Chapman layer) form the electric double layer. Due to the close distance between the charges, the Stern layer is fixed on the surface, but the more distant diffuse layer can move.

electrohydrodynamics A general term describing phenomena that involve the interaction between solid surfaces, ionic solutions, and applied electric and magnetic fields. It is frequently used in microfluidic devices to manipulate fluids and move particles for sample handling and chemical separation.

electrokinetics Study of the motion of charged particles under an applied electric field in moving substances such as water.

electrokinetic flow Transport of fluid or charged particles within a fluid by means of electric fields. See also *electroosmosis*, *electrophoresis*, *electrothermal flow*, and *dielectrophoresis*.

electrolyte A solution that can carry an electric current through the motion of ions.

electroosmosis Fluid flow in a narrow channel produced by the movement of the *electric double layer* (EDL) along the channel boundary under the influence of an applied electric field. Also, fluid flow through a membrane under the influence of an applied electric field. See also *electric double layer*.

electroosmotic flow See *electroosmosis*.

electrophoresis Migration of charged electrolyte ions or particles in an applied electric field.

electrothermal effects These effects occur in a conductive fluid where the temperature is modified by Joule heating from an AC electric field. This creates variations in conductivity and permittivity and thus Coulomb and dielectric body forces.

electrothermal flow Fluid flow resulting from an applied nonuniform AC electric field on a fluid. The Joule heating changes the fluid's electrical properties locally, and that effect, together with the power gradient of the AC electric field, results in fluid motion.

electrowetting The *electrowetting effect* describes the change in solid-electrolyte contact angle that occurs when a potential difference is applied between the solid and the electrolyte.

electrowetting-on-dielectric (EWOD) A form of *electrowetting* in which a thin insulating layer separates the conducting solid surface from the electrolyte.

Eötvös number See *Bond number*.

Eulerian frame A frame of reference with its coordinate axes fixed in space.

Fick's laws The first law relates the concentration gradients to the diffusive flux of low concentration solute diluted in a solvent. The second law introduces the first law into a differential material balance for the solute.

fluid-structure interaction (FSI) When a flow affects the deformation of a solid object and vice versa.

free molecular flow The flow of gas molecules through a geometry which is much smaller than the mean free path (Knudsen number, $Kn > 10$). In the free molecular flow regime the gas molecules collide with the walls of the geometry much more frequently than they collide with themselves.

fully developed laminar flow Laminar flow along a channel or pipe that has velocity components only in the main direction of the flow. The velocity profile perpendicular to the flow does not change downstream in the flow.

Gouy-Chapman layer See *electric double layer (EDL)*.

Hagen-Poiseuille equation See *Poiseuille's law*.

Helmholtz-Smoluchowski equation Gives the velocity of a parallel electroosmotic flow for an applied electric field.

intrinsic volume averages The physical properties of the fluid, such as density, viscosity, and pressure.

Knudsen number A dimensionless number that provides a measure of how rarefied a gas flow is, in other words, the mean free path of the gas molecules compared to the length scale of the flow. The following equation defines the Knudsen number Kn where λ is the mean free path of the molecules and L is a length scale characteristic to the flow.

$$Kn = \frac{\lambda}{L}$$

Knudsen layer A layer of rarefied fluid flow that occurs within a few mean free paths of the walls in a gas flow. The continuum Navier-Stokes equations break down in this layer.

Lagrangian frame A frame of reference with its coordinate axes fixed in a reference configuration of a deforming material. As the material deforms, the Lagrangian frame deforms with it.

Laplace number The Laplace number, La , (also known as the Suratman number, Su) relates the inertial and surface tension forces to the viscous forces. It is used to describe the breakup of liquid jets and sheets: at high Laplace and low Reynolds numbers the Rayleigh Instability occurs, at low Laplace and high Reynolds numbers atomization occurs. The Laplace number is given by:

$$La = \frac{\rho \sigma L}{\mu^2}$$

where ρ is the fluid density, σ is the surface tension coefficient, L is the characteristic length scale of the problem, and μ is the viscosity. The Laplace number is directly related to the Ohnesorge number, Oh , through the equation $La=1/Oh^2$.

Mach number Ratio of the convective speed, v , to the speed of sound in the medium, a . The Mach number, Ma , is defined by the equation:

$$Ma = \frac{v}{a}$$

magnetohydrodynamics Fluid-flow phenomena involving magnetic fields.

magnetophoresis Migration of magnetic or paramagnetic particles suspended in a fluid as a result of an applied magnetic field. The field must be nonuniform in the case of paramagnetic particles.

Marangoni effect Fluid flow parallel to an interface induced by surface tension gradients.

Marangoni number Ratio of thermal surface tension forces to viscous forces. The Marangoni number, Mg , is given by:

$$Mg = \frac{d\sigma L \Delta T}{dT \mu \alpha}$$

where σ is the surface tension coefficient, T is the absolute temperature (ΔT is the characteristic temperature difference), L is the characteristic length, and α is the thermal diffusivity ($\alpha = \kappa / (\rho c_p)$), where c_p is the heat capacity at constant pressure, κ is the thermal conductivity, and ρ is the density of the fluid.

microfluidics Study of the behavior of fluids at the microscale. Also refers to MEMS fluidic devices.

migration The transport of charged species in an electrolyte due to the electric force imposed by the electric field.

mobility The relation between the drift velocity of a molecule within a fluid and the applied electric field.

Newtonian flow Flow characterized by a constant viscosity or a viscosity that is independent of the shear rate in the fluid.

Nernst-Planck equation Flow equation that describes the flux of an ion through diffusion, convection, and migration in an electric field. The equation is valid for diluted electrolytes.

Ohnesorge number A dimensionless number relating the inertial and surface tension forces to the viscous forces. Used to describe the breakup of liquid jets and sheets: at low Ohnesorge and Reynolds numbers the Rayleigh instability occurs; at high Ohnesorge and Reynolds numbers, atomization occurs. The Ohnesorge number, Oh , is given by:

$$Oh = \frac{\mu}{\sqrt{\rho \sigma L}}$$

where ρ is the fluid density, σ is the surface tension coefficient, L is the characteristic length scale of the problem, and μ is the viscosity. The Ohnesorge number is directly related to the Laplace number, La , through the equation $Oh=1/La^{1/2}$.

Peclet number A dimensionless number describing the ratio of convection to diffusion in a fluid flow. The Peclet number, Pe , can be used to describe concentration diffusion or heat diffusion. It is given by:

$$Pe = \frac{vL}{D}$$

where v is the convective velocity, L is the flow length scale, and D is the diffusion constant.

Poiseuille's law Equation that relates the mass rate of flow in a tube as proportional to the pressure difference per unit length and to the fourth power of the tube radius. The law is valid for fully developed laminar flow.

Reynolds number A dimensionless number classifying how laminar or turbulent a flow is. The *Reynolds number* Re is a measure of the relative magnitude of the flow's viscous and inertial forces. It is defined by the following equation where ρ is the fluid density, μ is the dynamic viscosity, ν is its kinematic viscosity, v is a velocity characteristic to the flow, and L is a length scale characteristic to the flow.

$$Re = \frac{\rho v L}{\mu} = \frac{v L}{\nu}$$

slip flow Fluid flow that occurs when the *Knudsen number*, Kn , is in the range $0.01 < Kn < 0.1$. As a result of rarefaction effects in the *Knudsen layer* the no slip boundary condition fails. The flow outside the Knudsen layer can be represented by the continuum Navier-Stokes equations provided that an appropriate slip boundary condition is used for the fluid flow and the correct temperature jump boundary condition is applied at the interface.

streamline diffusion A numerical technique for stabilization of the numeric solution to a convection-dominated PDE by artificially adding diffusion in the direction of the streamlines.

Stern layer A layer of immobile ions and associated solvent molecules present at the solid-liquid interface in an electric double layer (EDL).

Stokes flow See *creeping flow*.

superficial volume averages The flow velocities, which correspond to a unit volume of the medium including both pores and matrix. They are sometimes called Darcy velocities, defined as volume flow rates per unit cross section of the medium.

surface tension Surface tension is a property of the surface of a liquid that allows it to resist an external force. Equivalently it can be thought of as the energy per unit area of the liquid surface. It is caused by asymmetries in the cohesive forces between molecules at the surface of the liquid.

Surataman number See *Laplace number*.

transitional flow Fluid flow that occurs when the *Knudsen number*, Kn , is in the range $0.1 < Kn < 10$. In this regime the flow is so rarefied that continuum equations break down completely. However collisions between the molecules are still important, so free molecular flow is not applicable.

Weber number A dimensionless number describing the ratio of inertial forces to surface tension forces. The Weber number is given by:

$$We = \frac{\rho v^2 L}{\sigma}$$

where ρ is the density of the fluid, v is the characteristic velocity of the flow, L is the characteristic length scale, and σ is the surface tension coefficient.

zeta potential The potential of at the interface between the electric double layer and a solid surface in an electrolyte.

I n d e x

- A**
 - absolute pressure 68, 126, 134, 140, 234
 - AC electric fields 52
 - AC electroosmosis 48
 - AC/DC Module 51
 - adsorption 298
 - Application Libraries window 23
 - application library examples
 - convection and diffusion 281
 - creeping flow 61
 - Darcy's law 208
 - electroosmosis 49
 - electrowetting lens 53
 - laminar flow 66
 - laminar, two-phase flow, moving mesh 144
 - level set conservation 193
 - migration in electric field 281
 - slip flow 260
 - storage model 214
 - transport of diluted species 276
 - atmosphere/gauge (node) 224
 - average linear velocity 247
- B**
 - Bond and Eötvös numbers 34
 - boundary nodes
 - Brinkman equations 230
 - Darcy's law interface 208
 - free and porous media flow 237
 - level set 174
 - phase field 179
 - slip flow 260
 - ternary phase field 186
 - transport of diluted species 278
 - boundary stress (node) 80
 - Brinkman equations 253
 - Brinkman equations interface 228
 - theory 253
- C**
 - Cahn-Hilliard equation 196, 201
 - capillary number 34
 - CFL number
 - settings 66, 230
 - chemical potential variable 200
 - Chemical Reaction Engineering Module 15, 44
 - chemical transport and reactions, modeling 44
 - Clausius-Mosotti factor
 - dielectrophoresis 50
 - magnetophoresis 51
 - common settings 20
 - complex permittivity 50
 - concentration (node)
 - transport of diluted species 285
 - continuity (node) 177, 183, 265
 - continuum flow 56
 - convection 321
 - convective terms, diluted species 313
 - coupling interfaces 46
 - coupling, fluid flow and electric fields 46
 - creeping flow 144, 258
 - creeping flow (spf) interface 60
 - crosswind diffusion, in fluid flow 32
- D**
 - Darcy velocity 219, 321
 - Darcy's law interface 206
 - theory 243
 - Debye layer, electroosmosis and 47
 - Debye length 48
 - Debye-Hückel approximation 47
 - dielectrophoresis (DEP) 50
 - dimensionless numbers 31–33
 - Dirichlet boundary condition 32
 - documentation 21
 - domain nodes

- Brinkman equations 230
- Darcy's law 208
- free and porous media flow 237
- level set 174
- phase field 179
- slip flow 260
- ternary phase field 186
- transport of diluted species 278
- Dukhin number 34
- E**
 - edge nodes
 - Darcy's law interface 208
 - slip flow 260
 - electric double layer (EDL), electroosmosis and 47
 - electrode-electrolyte interface coupling (node)
 - free and porous media flow 217
 - transport of diluted species 295
 - electrohydrodynamics, definition 46
 - electrokinetic flows 46
 - electrokinetics 46
 - electroosmosis 47
 - electroosmotic velocity, wall boundary condition 72
 - electrophoresis 46, 49
 - electrothermally driven flow 52
 - electrowetting on dielectric (EWOD) 53
 - elevation 216
 - emailing COMSOL 23
 - Equilibrium Reaction
 - theory for 311
 - equilibrium reaction (node) 292
 - external fluid interface (node) 147
 - external slip wall (node) 262
- F**
 - Faraday's law 317
 - flow continuity (node) 85
 - flow rate in SCCMs 77
 - flow regimes, for rarefied flows 56
 - fluid (node) 261
 - fluid and matrix properties (node)
 - Brinkman equations 231
 - Darcy's law 210
 - fluid flow
 - Brinkman equations theory 253
 - electrothermally driven 52
 - two-phase flow moving mesh theory 161
 - fluid properties (node)
 - free and porous media flow 238
 - single-phase, laminar flow 67
 - fluid-fluid interface (node) 145
 - flux (node)
 - transport of diluted species 286, 308
 - flux discontinuity (node) 287
 - Darcy's law 221
 - transport of diluted species 287
 - fracture flow (node) 227
 - free and porous matrix properties (node) 239
 - free and porous media flow interface 236
 - theory 256
 - Freundlich exponent 326
 - fully developed flow 77
- G**
 - general stress (boundary stress condition) 81
 - geometry frames 162
 - Ginzburg-Landau equation 197
 - gravity 87
- H**
 - heat transfer 54
 - Heat Transfer Module 54
 - Helmholtz-Smoluchowski equation 48
 - Henry's function 49
 - hydraulic head (node) 224
 - Hygroscopic Swelling 307
- I**
 - inflow (node) 284

- initial interface (node)
 - level set 176
 - phase field 182
 - initial values (node)
 - Brinkman equations 233
 - Darcy's law 213
 - free and porous media flow 240
 - level set 175, 181
 - phase field 188
 - single-phase, laminar flow 71
 - slip flow 263
 - transport of diluted species 282
 - initializing functions 194, 199
 - inlet (node) 219
 - single-phase flow 75
 - ternary phase field 188–189
 - interface normal variable 195
 - interior slip wall (node) 264
 - interior wall (node)
 - spf interfaces 83
 - interior wetted wall (node) 183
 - internet resources 21
 - intrinsic volume averages 253
 - isotropic diffusion 32
- J** Joule heating 52
- K** knowledge base, COMSOL 24
 Knudsen layer 57
 Knudsen number 14, 34, 56
- L** lab-on-a-chip devices 14
 laminar flow interface 61
 laminar three-phase flow, phase field interface 138
 laminar two-phase flow
 - moving mesh interface 143
 laminar two-phase flow, level set (tpf) interface 124, 132
 Langmuir constant 326
- Laplace number 35
 leaking wall, wall boundary condition 73, 242
 level set functions, initializing 194, 199
 level set interface 172
 - theory 150, 191
 level set model (node) 174
 line mass source (node)
 - fluid flow 86
 - species transport 289
 line source
 - species transport 315
 local
 - CFL number 66, 230

- M** Mach number 34
 magnetohydrodynamics 46
 magnetophoresis 46, 51
 Marangoni number 35
 mass based concentrations (node) 282
 mass conservation, level set equations
 - 153
 mass flux (node) 218
 mass source (node)
 - Brinkman equations 233
 - Darcy's law 213
 material frames 162
 mathematics, moving interfaces
 - level set 172
 - phase field 178, 185
 - theory 191, 196, 201
 MEMS Module 241
 MEMS, definition 14
 mesh frames 162
 microfluidic wall conditions (node) 240
 microfluidics
 - definition 14
 - dimensionless numbers, and 31–33
 - modeling techniques 28

- stabilization techniques 32
 - mixture properties (node) 186
 - modeling
 - electrohydrodynamics 46
 - microfluidics 28
 - transport of chemical species and ions
 - 44
 - moving interfaces 196, 201
 - MPH-files 23
 - multiphase flow
 - moving mesh theory 161
 - multiphase flow theory 150, 191, 196, 201
- N** Navier-Stokes equations 150
- Nernst-Einstein relation 280, 297, 301,
 - 317
- no flow (node) 221
 - Darcy's law 221
 - level set 176
- no flux (node) 284
- no slip, interior wall boundary condition
 - 83
- no slip, wall boundary condition 71, 242
- no viscous stress (open boundary) 80
- nodes, common settings 20
- non-conservative formulations 153
- nonconservative formulations 313
- normal stress, normal flow (boundary
 stress condition) 81
- numerical instability, dimensionless num-
 bers and 31
- O** Ohm's law 318
- Ohnesorge number 35
- open boundary (node)
 - single-phase flow 80
 - transport of diluted species 291
- outflow (node)
 - transport of diluted species 285
- outlet (node) 222
- single-phase flow 77
- ternary phase field 188
- P** pair nodes
 - Brinkman equations 230
 - Darcy's law interface 208
 - free and porous media flow 237
 - level set 174
 - phase field 179
 - slip flow 260
 - ternary phase field 186
 - transport of diluted species 278
- partially saturated porous media (node)
 - 299
- Peclet number 31
- periodic condition (node) 264
 - transport of diluted species 289
- periodic flow condition (node) 82
- permeability models 212
- pervious layer (node) 225
- phase field interface 178
 - theory 150, 196, 201
- phase field model (node) 180
- physics interfaces, common settings 20
- point mass source (node)
 - fluid flow 86
 - species transport 290
- point nodes
 - Brinkman equations 230
 - Darcy's law interface 208
 - free and porous media flow 237
 - slip flow 260
- point source
 - species transport 314
- poroelastic storage (node)
 - Darcy's law 215
- porous electrode coupling (node) 294
 - free and porous media flow 216
- porous media and subsurface flow

- Brinkman equations interface 228
- Darcy's law interface 206
- free and porous media flow interface
 - 236
 - theory, Brinkman equations 253
 - theory, free and porous media flow 256
- porous media transport properties (node) 295
- pressure (node) 217, 220, 222
- pressure head (node) 224
- pressure point constraint (node) 85
- pseudo time stepping
 - settings 66, 230
- R**
 - rarefied gas flow 56
 - Reacting Volume 283
 - reaction coefficients (node) 294
 - Reactions
 - in porous catalyst pellets 305
 - reactions (node)
 - transport of diluted species 282
 - reactive pellet bed (node) 303
 - retardation factor 326
 - Reuss average 214
 - Reynolds number, dimensionless numbers and 31
- S**
 - SCCM, flow rate in 77
 - selecting
 - multiphase flow interfaces 39
 - porous media flow interfaces 40
 - single-phase flow interfaces 37
 - SEMI standard E12-0303 76
 - single-phase flow interface
 - laminar flow 61
 - sliding wall 74
 - slip
 - Maxwell's boundary condition 57
 - slip flow 57
 - slip flow interface 258
 - theory 266
 - slip velocity, wall boundary condition 72
 - slip wall (node) 263
 - slip, interior wall boundary condition 84
 - slip, wall boundary condition 72, 242
 - spatial frames 162
 - stabilization techniques, dimensionless numbers and 32
 - standard cubic centimeters per minute 77
 - standard flow rate 77
 - standard settings 20
 - Stern layer 48
 - Stokes equations 60
 - Stokes flow 60, 144
 - storage model (node)
 - Darcy's law 214
 - stratified porous media 325
 - streamline diffusion, in fluid flow 32
 - superficial volume average, porous media 254
 - superficial volume averages, porous media 321
 - Supporting Electrolytes 317
 - Surataman number 35
 - surface equilibrium reaction (node) 293
 - surface tension force variable 200
 - symmetry (node) 79, 264
 - Darcy's law 220
 - transport of diluted species 287
 - T**
 - technical support, COMSOL 23
 - ternary phase field interface 185
 - theory
 - Brinkman equations 253
 - Darcy's law 243
 - free and porous media flow 256
 - level set 191

- phase field 196, 201
 - slip flow 266
 - tpf interfaces 150
 - transport of diluted species in porous media interface 310
 - transport of diluted species interface 309
 - two-phase flow moving mesh 161
- thermal creep, wall boundary condition 72
- thickness
 - fracture 308
 - out-of-plane 223
- thin barrier (node)
 - level set 177
- thin diffusion barrier (node) 291
- Thin Impermeable Barrier 291
- TMAC, microfluidic wall conditions 241
- tortuosity factors 323
- traction boundary conditions 80
- transport of diluted species in porous media interface 276
 - theory 310
- transport of diluted species interface 272
 - theory 309
- turbulent mixing (node)
 - transport of diluted species 281
- two-phase flow
 - moving mesh, theory 161
- V** variables
 - level set interface 195
 - phase field interface 200
- viscous slip, wall boundary condition 72
- volume averages 253
- volume force (node) 70
 - Brinkman equations 233
 - free and porous media flow 240
- W** wall (node)
 - free and porous media flow 241
 - single-phase flow 71
- wall fluid interface (node) 148
- wall roughness 83
- Weber number 35
- websites, COMSOL 24
- wetted wall (boundary condition) 128
- wetted wall (node) 182, 189
- Y** Young's equation 52