



Wire Electrode

Introduction

One of the most important aspects in the design of electrochemical cells is the current density distributions in the electrolyte and electrodes. Nonuniform current density distributions can be detrimental for the operation of electrochemical processes. In many cases the parts of an electrode that are subjected to high current density degrade at a faster rate. Knowledge of the current density distribution is also desired to optimize the utilization of the electrocatalysts, because these are often made of expensive noble metals. Nonuniform deposition and consumption, as well as unnecessarily high overvoltages, with resulting energy losses and possibly unwanted side-reactions, may be other effects that one would like to minimize.

This example models the *primary, secondary, and tertiary current density distributions* (Ref. 1) of an arbitrary electrochemical cell. It successively goes through the different classes of current density distributions so as to also show how complexity should be gradually introduced when modeling electrochemical cells.

The same geometry is considered in all three cases: a wire electrode structure is placed between two flat electrode surfaces, and in the open volume between the wire and the flat surfaces electrolyte is allowed to flow; see [Figure 1](#). The electrochemical cell can be seen as a unit cell of a larger wire-mesh electrode — an electrochemical cell setup common for many large-scale industrial processes.

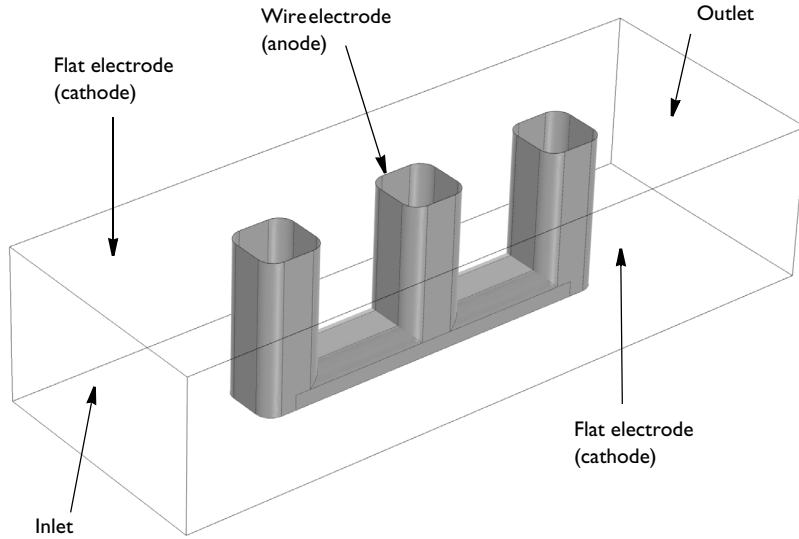


Figure 1: Modeled electrochemical cell. Wire electrode (anode) between two flat electrodes (cathodes). Flow inlet to the left, outlet to the right. The top and bottom flat surfaces are inert.

Model Definition

PRIMARY CURRENT DISTRIBUTION

Figure 1 shows the investigated geometry. Firstly, this example considers primary current density distribution. This is the situation where the mixing of electrolyte is vigorous or where concentration gradients are small, so that ionic migration is the dominating transport mechanism. The general mass balance in the electrolyte, assuming steady-state conditions and that no homogeneous reactions occur, can be given by

$$\nabla \cdot \mathbf{N}_i = 0$$

where \mathbf{N}_i is the flux of species i (SI unit: $\text{mol} \cdot \text{m}^2/\text{s}$), which in turn is governed by:

$$-D_i \nabla c_i - z_i m_i F c_i \nabla \phi_i + c_i \mathbf{u} = \mathbf{N}_i \quad (1)$$

where c_i represents the concentration of the ion i (SI unit: mol/m^3), z_i its valence, D_i its diffusivity (SI unit: m^2/s), m_i its mobility (SI unit: $\text{mol} \cdot \text{m}^2(\text{s} \cdot \text{V} \cdot \text{A})$), F denotes the Faraday constant (SI unit: As/mol), ϕ_i the ionic potential, and \mathbf{u} the velocity vector (SI unit: $\text{m}/$

s). The components operated upon by the above transport equation are often described as the diffusion, migration, and convection transport mechanisms. The net current density can be described through:

$$\mathbf{i} = -F \sum z_i \mathbf{N}_i$$

where i is the current density vector (SI unit: A/m²). Combining the three above equations, while assuming electroneutrality (which removes the convection term) and negligible concentration gradients (which removes diffusion) leaves:

$$\mathbf{i} = -F \sum -z_i^2 m_i F c_i \nabla \phi_l$$

Current density is conserved throughout:

$$\nabla \cdot \mathbf{i} = 0 \quad (2)$$

so that by combining the valence, ionic mobility, constant concentration and the Faraday constant to a representative conductivity, κ (SI unit: S/m)), [Equation 2](#) becomes:

$$\nabla \cdot (-\kappa \nabla \phi_l) = 0 \quad (3)$$

This final equation is equivalent to Ohm's Law.

The boundary conditions for the case of primary current density distribution assume that the kinetics on the electrode surfaces are fast, which allow the assumption of constant potential on these surfaces (all other boundaries are insulated). The solid phase (electronic conductor) potential on the cathode, $\phi_{s,c}$ (SI unit: V), is a convenient choice of reference potential in the system:

$$\phi_{s,c} = 0$$

The electrode potential equals the difference between the potential of solid phase in the electrode, ϕ_e , and the potential in the adjacent electrolyte, ϕ_l :

$$E_{\text{electrode}} = \phi_s - \phi_l$$

In the absence of kinetic losses, the cathode potential, E_c , equals the equilibrium potential, $E_{\text{eq},c}$:

$$E_{\text{eq},c} = \phi_{s,c} - \phi_{l,c} = -\phi_{l,c}$$

which sets the boundary condition for the cathode.

The potential difference over the whole cell, E_{cell} , is defined as the potential difference between the solid phases of the two electrodes

$$E_{\text{cell}} = \phi_{s,a} - \phi_{s,c} = \phi_{s,a}$$

In this way the boundary condition for the ionic potential at the anode can be set via:

$$E_{\text{eq},a} = \phi_{s,a} - \phi_{l,a} = E_{\text{cell}} - \phi_{l,a}$$

SECONDARY CURRENT DISTRIBUTION

Secondary current distribution takes into account the kinetics at the electrodes. Mixing is supposed to be good and the electroneutrality condition still relevant so that Ohm's Law remains a good description for the equations in the domain. Yet the electrochemical reactions are no longer fast enough that a constant potential can be applied at the electrodes. The properties of the chemical species and their ability to react at the surface, that is, the reaction driving forces (overvoltages), need to be considered.

In this model, the expressions for the local current density, i (SI unit: A/m^2), is based on the Butler–Volmer equation (Ref. 2) for a single electron reaction. For the secondary current distribution case (that is, without concentration dependence) it reads:

$$i_{\text{loc}} = i_0(\exp(\eta(1 - \beta)F/(RT)) - \exp(\eta\beta F/(RT)))$$

here T is the temperature and R is the gas constant (SI unit: $\text{J}/(\text{K}\cdot\text{mol})$). i_0 , the exchange current density, (SI unit: A/m^2), and β , the symmetry factor, are reaction and electrode dependent and are therefore different for each electrode. The overpotential, η , is the difference between the electrode potential and the equilibrium potential for the electrode reaction, defined in the following way:

$$\eta = E_{\text{electrode}} - E_{\text{eq}}$$

This results in the following expressions for the overpotentials for the cathode and anode, respectively:

$$\eta_c = -\phi_{l,c} - E_{\text{eq},c}$$

$$\eta_a = E_{\text{cell}} - \phi_{l,a} - E_{\text{eq},a}$$

TERTIARY CURRENT DISTRIBUTION

In tertiary current density distribution, mass transport through diffusion, convection, and migration has to be considered (that is, all components of Equation 1).

For the net ionic charge transport the assumption for this model still is electroneutrality and a supporting electrolyte with negligible concentration gradients, which means that the potential distribution in the electrolyte can be described through Ohm's Law (Equation 3)

To introduce a mass transport dependence in this model the species being oxidized at the anode now has mass transport limitations and its localized concentration, c (SI unit: mol/m³), affects the electrode kinetics. The anodic branch of the Butler–Volmer expression at the anode therefore gets a concentration dependence, and the expression now reads:

$$i_a = i_0 \left(\frac{c}{c_0} \exp(\eta(1 - \beta)F/(RT)) - \exp(\eta\beta F/(RT)) \right) \quad (4)$$

Here c_0 (SI unit: mol/m³) denotes a reference concentration (equal to the inlet concentration). Equation 4 is applied to the wire (anode) electrode, while the cathodes keep the expression for the local current density from the secondary current distribution model.

Also a momentum balance is introduced to describe the convection. In this case, the assumption is a stationary laminar incompressible flow, using the Navier-Stokes equation:

$$\begin{aligned} -\nabla \cdot \mu(\nabla \mathbf{u} + (\nabla \mathbf{u})^T) + \rho(\mathbf{u} \cdot \nabla) \mathbf{u} + \nabla p &= 0 \\ \nabla \cdot \mathbf{u} &= 0 \end{aligned} \quad (5)$$

where μ is the dynamic viscosity (SI unit: Ns/m²), ρ density (SI unit: kg/m³) and p pressure (SI unit: Pa).

No Slip boundary conditions are applied to the electrode surfaces, and slip boundary conditions to the top and bottom to account for the periodically repeating unit cell in this spatial direction. At the inlet, a laminar inflow with a fixed mean velocity is specified, whereas a pressure condition specifying a zero reference pressure is used at the outlet.

Finally, Equation 1 accounts for the mass transport of the reacting species:

$$\nabla \cdot (-D\nabla c - zmFc\nabla\phi + c\mathbf{u}) = 0 \quad (6)$$

No-flux boundary conditions are applied for all boundaries except for the inlet, outlet and the anode. At the inlet, a fixed concentration is specified. Outflow conditions are applied for the outlet. Faraday's law is used to specify the net molar flux at the anode where the species is consumed:

$$N_a = -\frac{i_a}{F}$$

Results and Discussion

Figure 2 shows the different polarization plots that results from using a parametric solver to solve for all the three cases of current distribution. The total current decreases as potential losses due to kinetics and mass transport are introduced in the model. The following sections cover each case more in detail.

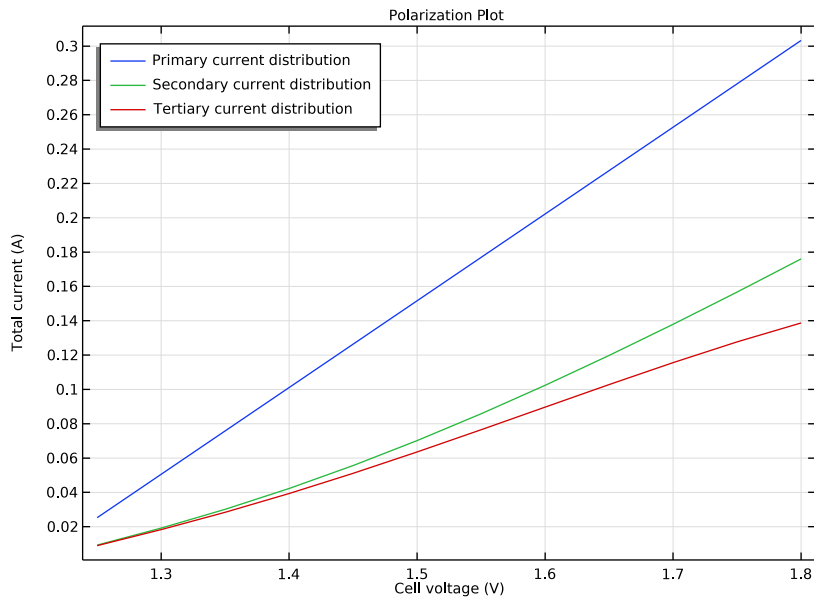


Figure 2: Polarization plots comparing the three cases of current distribution.

PRIMARY CURRENT DISTRIBUTION

Figure 3 shows the potential distribution in the electrolyte and current density distribution at the anode at a cell voltage of 1.45 V. The current density distribution is highest at the corners of the wires and close to zero at the central parts of the wire structure.

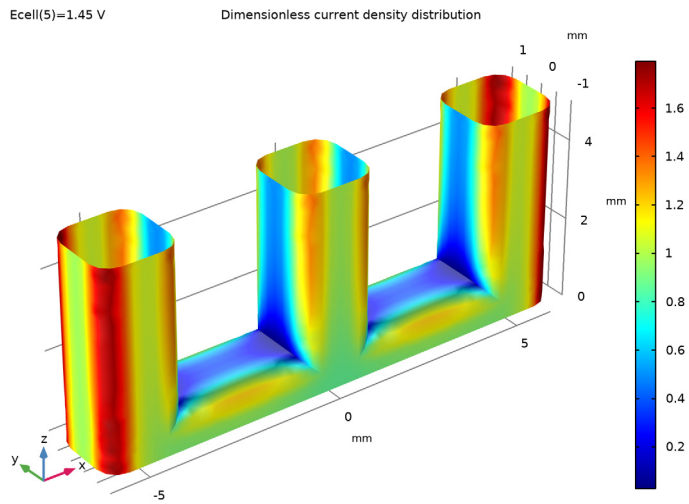
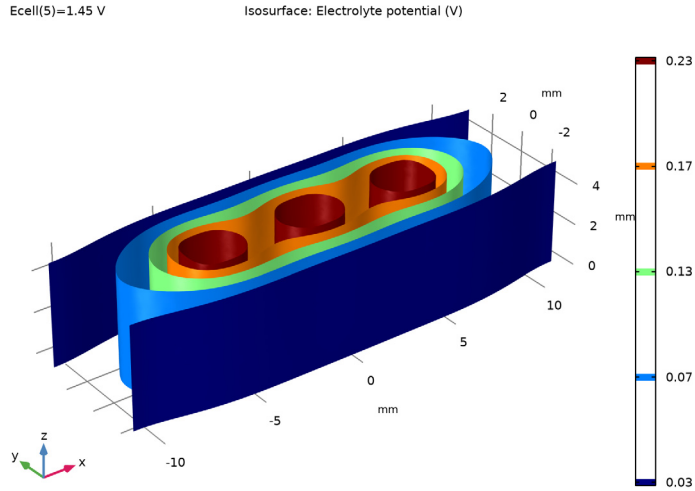


Figure 3: Primary current distribution, $E_{cell}=1.45$ V. Potential distribution in the electrolyte (top) and current density on the anode (bottom).

SECONDARY CURRENT DISTRIBUTION

Figure 4 shows the plots for the secondary current distribution. A higher cell voltage is chosen reach a total cell current comparable to Figure 3. Compared to the primary current

distribution the secondary current distribution is smoother, this is due to the effect that a high local current density induces local overpotential losses on the electrode surface.

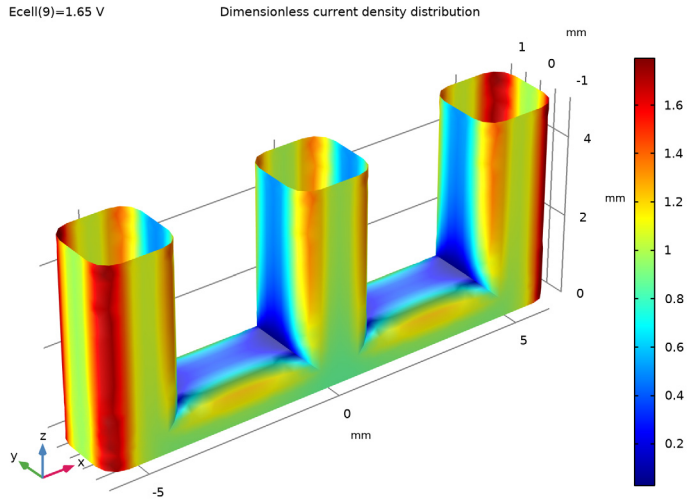
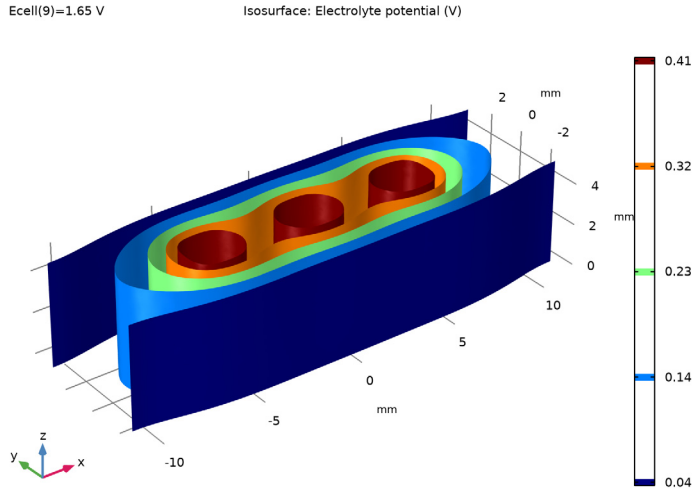


Figure 4: Secondary current distribution, $E_{cell}=1.65$ V. Potential distribution in the electrolyte (left) and current density on the anode (right).

TERTIARY CURRENT DISTRIBUTION

Figure 5 shows the flow velocity magnitude of the flow and the concentration of the reactant at 1.8 V. The convective flow is close to zero between the wires, and this results in a depletion zone with low concentration in these parts in the cell.

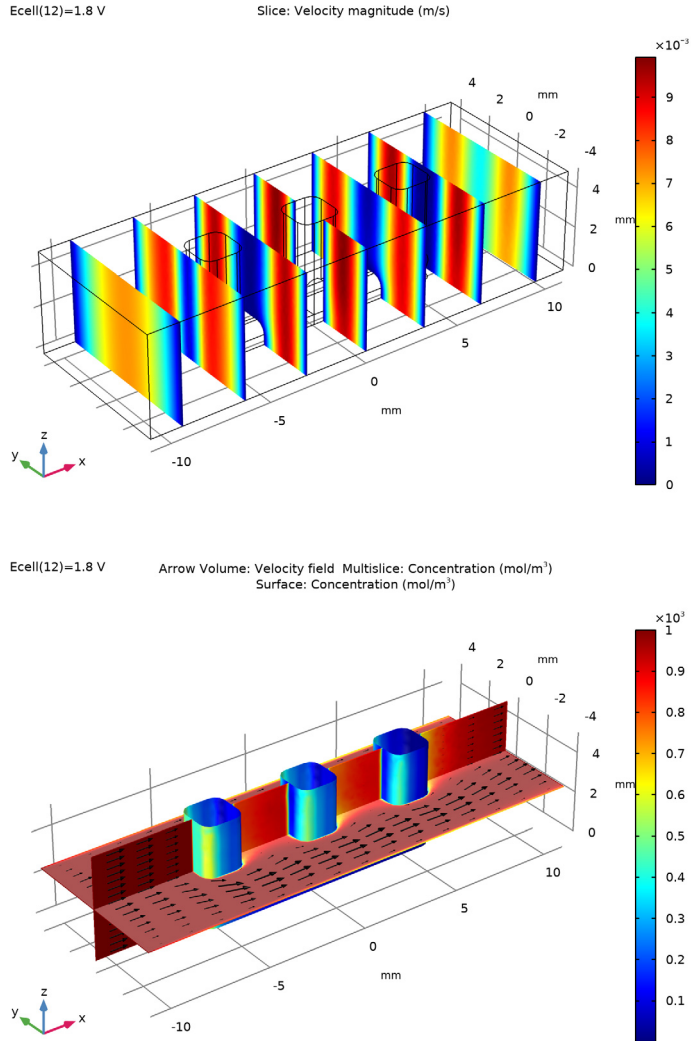


Figure 5: Flow field (top: slice plot, right: arrows) and concentration profile (bottom: slices and anode surface) at 1.8 V.

Figure 6 shows the resulting potential and current density distribution. The low concentration between the wires now impacts severely on the smoothness of the current distribution.

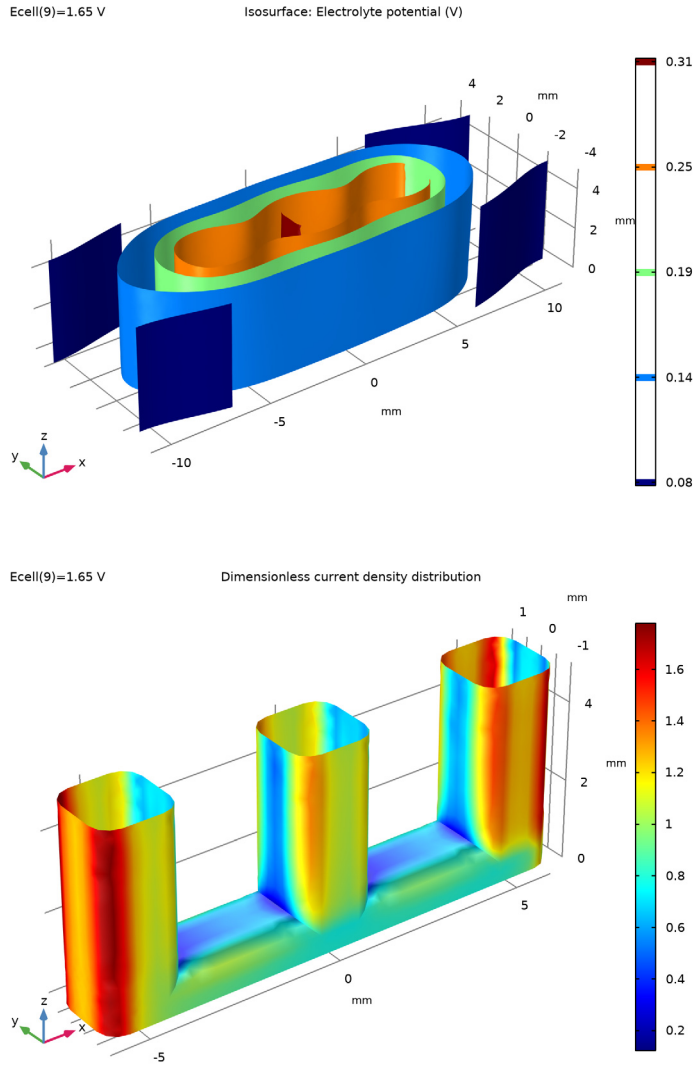


Figure 6: Tertiary current distribution, $E_{cell}=1.65$ V. Potential distribution in the electrolyte (top) and current density on the anode (bottom).

Notes About the COMSOL Implementation

You set up the model using the following physics interfaces:

- Primary Current Distribution for modeling the electrolyte potential, governed by Ohm's Law (Equation 3). The secondary and tertiary current distributions are modeled by changing the current distribution type of the interface to Secondary.
- Transport of Diluted Species for the mass transport of the reacting species (Equation 6).
- Laminar Flow for the momentum balance to describe the convection (Equation 5).

References


1. J.S. Newman, *Electrochemical Systems*, 2nd ed., Prentice Hall, NJ, 1990.
2. J. O'M. Bockris and A.K.N. Reddy, *Modern Electrochemistry*, Plenum Press, NY, 1970.

Application Library path: Fuel_Cell_and_Electrolyzer_Module/Electrolyzers/wire_electrode




Modeling Instructions

From the **File** menu, choose **New**.

NEW



In the **New** window, click  **Model Wizard**.

MODEL WIZARD

- 1 In the **Model Wizard** window, click  **3D**.
- 2 In the **Select Physics** tree, select **Electrochemistry>Primary and Secondary Current Distribution>Primary Current Distribution (cd)**.
- 3 Click **Add**.
- 4 Click  **Study**.
- 5 In the **Select Study** tree, select **General Studies>Stationary**.
- 6 Click  **Done**.

GEOMETRY I

The model geometry is available as a parameterized geometry sequence in a separate MPH-file. If you want to build it from scratch, follow the instructions in the section [Appendix — Geometry Modeling Instructions](#). Otherwise load it from file with the following steps.

- 1 In the **Geometry** toolbar, click  **Insert Sequence**.
- 2 Browse to the model's Application Libraries folder and double-click the file `wire_electrode_geom_sequence.mph`.
- 3 In the **Geometry** toolbar, click  **Build All**.

GLOBAL DEFINITIONS

Now start defining the physics for the primary current distribution simulation. Begin with the model parameters.

Parameters I



- 1 In the **Model Builder** window, under **Global Definitions** click **Parameters I**.
- 2 In the **Settings** window for **Parameters**, locate the **Parameters** section.
- 3 In the table, enter the following settings:

Name	Expression	Value	Description
Ecell	1.3[V]	1.3 V	Cell voltage
Eeq_c	0[V]	0 V	Cathode equilibrium potential
Eeq_a	1.2[V]	1.2 V	Anode equilibrium potential

MATERIALS

Add water from the material library. Modify the material by adding the conductivity value.

ADD MATERIAL

- 1 In the **Home** toolbar, click  **Add Material** to open the **Add Material** window.
- 2 Go to the **Add Material** window.
- 3 In the tree, select **Built-in>Water, liquid**.
- 4 Click **Add to Component** in the window toolbar.
- 5 In the **Home** toolbar, click  **Add Material** to close the **Add Material** window.

MATERIALS

Electrolyte

- 1 In the **Settings** window for **Material**, locate the **Material Contents** section.
- 2 In the table, enter the following settings:

Property	Variable	Value	Unit	Property group
Electrolyte conductivity	sigma_iso ; sigma_ii = sigma_iso, sigma_ij = 0	10 [S/m]	S/m	Electrolyte conductivity


- 3 Right-click **Component 1 (comp1)>Materials>Water, liquid (mat1)** and choose **Rename**.
- 4 In the **Rename Material** dialog box, type **Electrolyte** in the **New label** text field.
- 5 Click **OK**.

PRIMARY CURRENT DISTRIBUTION (CD)

Electrolyte 1

Now start setting up the physics. Only the equilibrium potentials and the electrode potential boundary values need to be set for the primary current distribution.



Electrode Surface 1

- 1 In the **Model Builder** window, right-click **Primary Current Distribution (cd)** and choose **Electrode Surface**.
- 2 Select Boundaries 2 and 5 only.
Create selections for these anodes. The selection will be used later when setting up more physics, meshing, and postprocessing.
- 3 In the **Settings** window for **Electrode Surface**, locate the **Boundary Selection** section.
- 4 Click  **Create Selection**.
- 5 In the **Create Selection** dialog box, type **Cathodes** in the **Selection name** text field.
- 6 Click **OK**.

Electrode Reaction 1

- 1 In the **Model Builder** window, expand the **Electrode Surface 1** node, then click **Electrode Reaction 1**.
- 2 In the **Settings** window for **Electrode Reaction**, locate the **Equilibrium Potential** section.
- 3 In the E_{eq} text field, type E_{eq_c} .

Electrode Surface 2

- 1 In the **Physics** toolbar, click  **Boundaries** and choose **Electrode Surface**.
- 2 Select Boundaries 6–51 only.
This selection is easiest to achieve by selecting all boundaries (the 'All boundaries' check box), followed by deselecting all exterior surfaces.
- 3 In the **Settings** window for **Electrode Surface**, locate the **Boundary Selection** section.
- 4 Click  **Create Selection**.
- 5 In the **Create Selection** dialog box, type Anode in the **Selection name** text field.
- 6 Click **OK**.
- 7 In the **Settings** window for **Electrode Surface**, locate the **Electrode Phase Potential Condition** section.
- 8 In the $\phi_{s,ext}$ text field, type Ece11.

Electrode Reaction 1

- 1 In the **Model Builder** window, expand the **Electrode Surface 2** node, then click **Electrode Reaction 1**.
- 2 In the **Settings** window for **Electrode Reaction**, locate the **Equilibrium Potential** section.
- 3 In the E_{eq} text field, type Eeq_a.

Initial Values 1

Also, provide initial values for the electrolyte potential.

- 1 In the **Model Builder** window, click **Initial Values 1**.
- 2 In the **Settings** window for **Initial Values**, locate the **Initial Values** section.
- 3 In the *phil* text field, type $(E_{ce11} - E_{eq_a} - E_{eq_c}) / 2$.

MESH 1

The following steps create a mesh with boundary layers adjacent to the anode and cathode surfaces. This is a convenient way of increasing the number of mesh elements close to a surface of special interest.

Boundary Layers 1


In the **Mesh** toolbar, click  **Boundary Layers**.

Boundary Layer Properties

- 1 In the **Model Builder** window, click **Boundary Layer Properties**.
- 2 In the **Settings** window for **Boundary Layer Properties**, locate the **Geometric Entity Selection** section.

- 3 From the **Selection** list, choose **Anode**.
- 4 Locate the **Boundary Layer Properties** section. In the **Number of boundary layers** text field, type 6.
- 5 In the **Boundary layer stretching factor** text field, type 1.3.
- 6 From the **Thickness of first layer** list, choose **Manual**.
- 7 In the **Thickness** text field, type $2e-5$ [m].

Boundary Layer Properties I

- 1 In the **Mesh** toolbar, click  **More Attributes** and choose **Boundary Layer Properties**.
- 2 In the **Settings** window for **Boundary Layer Properties**, locate the **Boundary Selection** section.
- 3 From the **Selection** list, choose **Cathodes**.
- 4 Locate the **Boundary Layer Properties** section. In the **Number of boundary layers** text field, type 2.
- 5 In the **Boundary layer stretching factor** text field, type 1.3.
- 6 In the **Thickness adjustment factor** text field, type 5.


Size

- 1 In the **Model Builder** window, click **Size**.
- 2 In the **Settings** window for **Size**, locate the **Element Size** section.
- 3 From the **Calibrate for** list, choose **Fluid dynamics**.


DEFINITIONS

Before solving, create some component couplings to be used when analyzing the results.

Integration I (intopI)

- 1 In the **Definitions** toolbar, click  **Nonlocal Couplings** and choose **Integration**.
- 2 In the **Settings** window for **Integration**, type anode_int in the **Operator name** text field.
- 3 Locate the **Source Selection** section. From the **Geometric entity level** list, choose **Boundary**.
- 4 From the **Selection** list, choose **Anode**.

Average I (aveopI)

- 1 In the **Definitions** toolbar, click  **Nonlocal Couplings** and choose **Average**.
- 2 In the **Settings** window for **Average**, type anode_avg in the **Operator name** text field.
- 3 Locate the **Source Selection** section. From the **Geometric entity level** list, choose **Boundary**.

4 From the **Selection** list, choose **Anode**.

STUDY 1

The model is now ready for solving. Add an auxiliary continuation sweep to solve for a range of cell potentials.

Step 1: Stationary

- 1 In the **Model Builder** window, under **Study 1** click **Step 1: Stationary**.
- 2 In the **Settings** window for **Stationary**, click to expand the **Study Extensions** section.
- 3 Select the **Auxiliary sweep** check box.
- 4 Click **+ Add**.
- 5 In the table, enter the following settings:

Parameter name	Parameter value list	Parameter unit
Ecell (Cell voltage)	range(1.25,0.05,1.8)	V

- 6 In the **Model Builder** window, click **Study 1**.
- 7 In the **Settings** window for **Study**, locate the **Study Settings** section.
- 8 Clear the **Generate default plots** check box.
- 9 In the **Home** toolbar, click **= Compute**.

You have now solved the primary current distribution model.

Solution 1 (sol1)

To store this particular primary current distribution solution from the latest computation, copy and store the solution in order to compare with these results later when you modify the model.

- 1 In the **Model Builder** window, expand the **Study 1>Solver Configurations** node.
- 2 Right-click **Solution 1 (sol1)** and choose **Solution>Copy**.


Primary current distribution

- 1 In the **Model Builder** window, under **Study 1>Solver Configurations** click **Solution 1 - Copy 1 (sol2)**.
- 2 In the **Settings** window for **Solution**, type Primary current distribution in the **Label** text field.

RESULTS

Polarization Plot

Now create a polarization plot for the primary current distribution model.

- 1 In the **Home** toolbar, click  **Add Plot Group** and choose **ID Plot Group**.
- 2 In the **Settings** window for **ID Plot Group**, type Polarization Plot in the **Label** text field.
- 3 Locate the **Data** section. From the **Dataset** list, choose **None**.
- 4 Click to expand the **Title** section. From the **Title type** list, choose **Label**.
- 5 Locate the **Plot Settings** section. Select the **x-axis label** check box.
- 6 In the associated text field, type Cell voltage (V).
- 7 Select the **y-axis label** check box.
- 8 In the associated text field, type Total current (A).
- 9 Locate the **Legend** section. From the **Position** list, choose **Upper left**.

Global I

- 1 Right-click **Polarization Plot** and choose **Global**.
- 2 In the **Settings** window for **Global**, locate the **Data** section.
- 3 From the **Dataset** list, choose **Study 1/Primary current distribution (sol2)**.
- 4 Locate the **y-Axis Data** section. In the table, enter the following settings:

Expression	Unit	Description
abs(anode_int(cd.nI1))	A	


- 5 Click to expand the **Legends** section. From the **Legends** list, choose **Manual**.
- 6 In the table, enter the following settings:

Legends
Primary current distribution

- 7 In the **Polarization Plot** toolbar, click  **Plot**.



Electrolyte Potential

The following creates an isosurface of the potential in the electrolyte.

- 1 In the **Home** toolbar, click  **Add Plot Group** and choose **3D Plot Group**.
- 2 In the **Settings** window for **3D Plot Group**, type Electrolyte Potential in the **Label** text field.


- 3 Locate the **Data** section. From the **Dataset** list, choose **Study 1/ Primary current distribution (sol2)**.
- 4 From the **Parameter value (Ecell (V))** list, choose **1.45**.
- 5 Locate the **Plot Settings** section. Clear the **Plot dataset edges** check box.

Isosurface 1



- 1 Right-click **Electrolyte Potential** and choose **Isosurface**.
- 2 In the **Electrolyte Potential** toolbar, click  **Plot**.
- 3 Click the  **Zoom Extents** button in the **Graphics** toolbar.

Dimensionless current density distribution

The following creates a normalized plot of the normal electrolyte current density on the anode surface.

- 1 In the **Home** toolbar, click  **Add Plot Group** and choose **3D Plot Group**.
- 2 In the **Settings** window for **3D Plot Group**, type Dimensionless current density distribution in the **Label** text field.
- 3 Locate the **Data** section. From the **Dataset** list, choose **Study 1/ Primary current distribution (sol2)**.
- 4 From the **Parameter value (Ecell (V))** list, choose **1.45**.
- 5 Click to expand the **Selection** section. From the **Geometric entity level** list, choose **Boundary**.
- 6 From the **Selection** list, choose **Anode**.
- 7 Click to expand the **Title** section. From the **Title type** list, choose **Label**.
- 8 Locate the **Plot Settings** section. Clear the **Plot dataset edges** check box.

Surface 1

- 1 Right-click **Dimensionless current density distribution** and choose **Surface**.
Plot the normal current density divided by the average normal current density.
- 2 In the **Settings** window for **Surface**, locate the **Expression** section.
- 3 In the **Expression** text field, type $(\text{comp1.cd.nI1})/\text{anode_avg}(\text{comp1.cd.nI1})$.
- 4 In the **Dimensionless current density distribution** toolbar, click  **Plot**.
- 5 Click the  **Zoom Extents** button in the **Graphics** toolbar.

PRIMARY CURRENT DISTRIBUTION (CD)

Now modify the model to simulate the secondary current distribution.

- 1 In the **Model Builder** window, under **Component 1 (comp1)** click **Primary Current Distribution (cd)**.
- 2 In the **Settings** window for **Primary Current Distribution**, locate the **Current Distribution Type** section.
- 3 From the **Current distribution type** list, choose **Secondary**.

GLOBAL DEFINITIONS

Parameters 1

Add the needed parameters for the secondary model.

- 1 In the **Model Builder** window, under **Global Definitions** click **Parameters 1**.
- 2 In the **Settings** window for **Parameters**, locate the **Parameters** section.
- 3 In the table, enter the following settings:

Name	Expression	Value	Description
i_{0_c}	100[A/m ²]	100 A/m ²	Cathode exchange current density
i_{0_a}	100[A/m ²]	100 A/m ²	Anode exchange current density
be_c	0.5	0.5	Cathode symmetry factor
be_a	0.5	0.5	Anode symmetry factor
T	298[K]	298 K	Temperature

SECONDARY CURRENT DISTRIBUTION (CD)

Electrode Reaction 1

Now set up the new boundary conditions for the secondary current distribution by adding the needed kinetic parameters for **Electrode Reaction 1 (er1)** in **Electrode Surface 1 (es1)** node.

- 1 In the **Model Builder** window, under **Component 1 (comp1)**>
Secondary Current Distribution (cd)>**Electrode Surface 1** click **Electrode Reaction 1**.
- 2 In the **Settings** window for **Electrode Reaction**, locate the **Electrode Kinetics** section.
- 3 From the **Kinetics expression type** list, choose **Butler-Volmer**.
- 4 In the i_0 text field, type i_{0_c} .
- 5 In the α_a text field, type be_c .
- 6 In the α_c text field, type $1-be_c$.

Similarly, define the kinetic parameters at the anode for **Electrode Reaction 1 (er1)** in **Electrode Surface 2 (es2)** node.

Electrode Reaction 1

- 1 In the **Model Builder** window, click **Electrode Reaction 1**.
- 2 In the **Settings** window for **Electrode Reaction**, locate the **Electrode Kinetics** section.
- 3 From the **Kinetics expression type** list, choose **Butler-Volmer**.
- 4 In the i_0 text field, type $i0_a$.
- 5 In the α_a text field, type be_a .
- 6 In the α_c text field, type $1-be_a$.


GLOBAL DEFINITIONS

Default Model Inputs

Set up the temperature value used in the entire model.

- 1 In the **Model Builder** window, under **Global Definitions** click **Default Model Inputs**.
- 2 In the **Settings** window for **Default Model Inputs**, locate the **Browse Model Inputs** section.
- 3 In the tree, select **General>Temperature (K) - minput.T**.
- 4 Find the **Expression for remaining selection** subsection. In the **Temperature** text field, type T .

STUDY 1

In the **Home** toolbar, click  **Compute**.

RESULTS

Electrolyte Potential

You have now solved the secondary current distribution problem.

STUDY 1

Secondary current distribution

- 1 In the **Model Builder** window, under **Study 1>Solver Configurations** click **Solution 1 (sol1)**.
- 2 In the **Settings** window for **Solution**, type Secondary current distribution in the **Label** text field.

RESULTS


Proceed to look at the results by adding the secondary current distribution polarization plot.

Global 2

- 1 In the **Model Builder** window, under **Results>Polarization Plot** right-click **Global 1** and choose **Duplicate**.
- 2 In the **Settings** window for **Global**, locate the **Data** section.
- 3 From the **Dataset** list, choose **Study 1/Secondary current distribution (sol1)**.
- 4 Locate the **Legends** section. In the table, enter the following settings:



Legends
Secondary current distribution

Polarization Plot



- 1 In the **Model Builder** window, click **Polarization Plot**.
- 2 In the **Polarization Plot** toolbar, click  **Plot**.

Electrolyte Potential

Note the 3D plots are now showing the results of the latest computation. (By choosing different datasets you may compare the primary and secondary current distribution results.)

- 1 In the **Model Builder** window, click **Electrolyte Potential**.
- 2 In the **Settings** window for **3D Plot Group**, locate the **Data** section.
- 3 From the **Parameter value (Ecell (V))** list, choose **1.65**.
- 4 In the **Electrolyte Potential** toolbar, click  **Plot**.
- 5 Click the  **Zoom Extents** button in the **Graphics** toolbar.

Dimensionless current density distribution

- 1 In the **Model Builder** window, click **Dimensionless current density distribution**.
- 2 In the **Settings** window for **3D Plot Group**, locate the **Data** section.
- 3 From the **Parameter value (Ecell (V))** list, choose **1.65**.
- 4 In the **Dimensionless current density distribution** toolbar, click  **Plot**.
- 5 Click the  **Zoom Extents** button in the **Graphics** toolbar.

GLOBAL DEFINITIONS

Now modify the problem to model a tertiary current distribution problem by adding mass transport. Start by adding the parameters.



Parameters 1

- 1 In the **Model Builder** window, under **Global Definitions** click **Parameters 1**.

- 2 In the **Settings** window for **Parameters**, locate the **Parameters** section.
- 3 In the table, enter the following settings:

Name	Expression	Value	Description
D	1e-9[m^2/s]	1E-9 m ² /s	Diffusion coefficient
c_in	1e3[mol/m^3]	1000 mol/m ³	Inlet concentration
u_in	5[mm/s]	0.005 m/s	Inlet flow velocity

ADD PHYSICS

- 1 In the **Home** toolbar, click  **Add Physics** to open the **Add Physics** window.
- 2 Go to the **Add Physics** window.
- 3 In the tree, select **Chemical Species Transport>Transport of Diluted Species (tds)**.
- 4 Click **Add to Component 1** in the window toolbar.
- 5 In the tree, select **Fluid Flow>Single-Phase Flow>Laminar Flow (spf)**.
- 6 Click **Add to Component 1** in the window toolbar.
- 7 In the **Home** toolbar, click  **Add Physics** to close the **Add Physics** window.

TRANSPORT OF DILUTED SPECIES (TDS)



- 1 In the **Model Builder** window, under **Component 1 (comp1)** click **Transport of Diluted Species (tds)**.
- 2 In the **Settings** window for **Transport of Diluted Species**, locate the **Transport Mechanisms** section.
- 3 Select the **Migration in electric field** check box.

Transport Properties 1



The velocity field will be coupled to Laminar Flow later using the Reacting Flow multiphysics feature.

- 1 In the **Model Builder** window, under **Component 1 (comp1)>Transport of Diluted Species (tds)** click **Transport Properties 1**.
- 2 In the **Settings** window for **Transport Properties**, locate the **Diffusion** section.
- 3 In the D_c text field, type D.
The migration potential will be coupled to Secondary Current Distribution later using the Potential Coupling multiphysics feature.
- 4 Locate the **Migration in Electric Field** section. In the z_c text field, type -1.

Inflow 1

- 1 In the **Physics** toolbar, click  **Boundaries** and choose **Inflow**.
- 2 Select Boundary 1 only.
- 3 In the **Settings** window for **Inflow**, locate the **Boundary Selection** section.
- 4 Click  **Create Selection**.
- 5 In the **Create Selection** dialog box, type In1et in the **Selection name** text field.
- 6 Click **OK**.
- 7 In the **Settings** window for **Inflow**, locate the **Concentration** section.
- 8 In the $c_{0,c}$ text field, type c_in.

Outflow 1


- 1 In the **Physics** toolbar, click  **Boundaries** and choose **Outflow**.
- 2 Select Boundary 52 only.
- 3 In the **Settings** window for **Outflow**, locate the **Boundary Selection** section.
- 4 Click  **Create Selection**.
- 5 In the **Create Selection** dialog box, type Out1et in the **Selection name** text field.
- 6 Click **OK**.

Initial Values 1

- 1 In the **Model Builder** window, click **Initial Values 1**.
- 2 In the **Settings** window for **Initial Values**, locate the **Initial Values** section.
- 3 In the c text field, type c_in.

Electrode Surface Coupling 1

Couple the flux on the anode surface to the electrode reaction currents by using a Electrode-Electrolyte Interface Coupling feature.

- 1 In the **Physics** toolbar, click  **Boundaries** and choose **Electrode Surface Coupling**.
- 2 In the **Settings** window for **Electrode Surface Coupling**, locate the **Boundary Selection** section.
- 3 From the **Selection** list, choose **Anode**.

Reaction Coefficients 1

- 1 In the **Model Builder** window, expand the **Electrode Surface Coupling 1** node, then click **Reaction Coefficients 1**.
- 2 In the **Settings** window for **Reaction Coefficients**, locate the **Model Inputs** section.
- 3 From the i_{loc} list, choose **Local current density, Electrode Reaction 1 (cd/es2/er1)**.

4 Locate the **Stoichiometric Coefficients** section. In the v_c text field, type 1.

SECONDARY CURRENT DISTRIBUTION (CD)

Also modify the current density expression to be concentration dependent.


Electrode Reaction 1

- 1 In the **Model Builder** window, under **Component 1 (comp1)**>
Secondary Current Distribution (cd)>**Electrode Surface 2** click **Electrode Reaction 1**.
- 2 In the **Settings** window for **Electrode Reaction**, locate the **Equilibrium Potential** section.
- 3 From the E_{eq} list, choose **Nernst equation**.
- 4 In the $E_{eq,ref}(T)$ text field, type E_{eq_a} .
- 5 In the C_R text field, type c/c_in .
- 6 Locate the **Electrode Kinetics** section. From the **Exchange current density type** list, choose **From Nernst Equation**.
- 7 In the $i_{0,ref}(T)$ text field, type $i0_a$.


LAMINAR FLOW (SPF)

In the **Model Builder** window, under **Component 1 (comp1)** click **Laminar Flow (spf)**.


Inlet 1

- 1 In the **Physics** toolbar, click  **Boundaries** and choose **Inlet**.
- 2 In the **Settings** window for **Inlet**, locate the **Boundary Selection** section.
- 3 From the **Selection** list, choose **Inlet**.
- 4 Locate the **Boundary Condition** section. From the list, choose **Fully developed flow**.
- 5 Locate the **Fully Developed Flow** section. In the U_{av} text field, type u_in .

Outlet 1

- 1 In the **Physics** toolbar, click  **Boundaries** and choose **Outlet**.
- 2 In the **Settings** window for **Outlet**, locate the **Boundary Selection** section.
- 3 From the **Selection** list, choose **Outlet**.
- 4 Locate the **Pressure Conditions** section. Select the **Normal flow** check box.


Wall 2

- 1 In the **Physics** toolbar, click  **Boundaries** and choose **Wall**.
- 2 Select Boundaries 3 and 4 only.
- 3 In the **Settings** window for **Wall**, locate the **Boundary Condition** section.
- 4 From the **Wall condition** list, choose **Slip**.

MULTIPHYSICS

Finally, set up the Reacting Flow and Potential Coupling multiphysics features.

Reacting Flow, Diluted Species 1 (rfd1)

In the **Physics** toolbar, click  **Multiphysics Couplings** and choose **Domain>Reacting Flow, Diluted Species**.

Potential Coupling 1 (pc1)

1 In the **Physics** toolbar, click  **Multiphysics Couplings** and choose **Domain>Potential Coupling**.

2 Select Domain 1 only.

ROOT

Next, set up the solver for the tertiary current distribution problem. Do this by adding a new study wherein you first solve for the flow problem, which does not depend on the other variables, and then the species transport and electric currents.

ADD STUDY

1 In the **Home** toolbar, click  **Add Study** to open the **Add Study** window.

2 Go to the **Add Study** window.

3 Find the **Studies** subsection. In the **Select Study** tree, select **General Studies>Stationary**.

4 Click **Add Study** in the window toolbar.

5 In the **Home** toolbar, click  **Add Study** to close the **Add Study** window.

STUDY 2

Step 1: Stationary

1 In the **Settings** window for **Stationary**, locate the **Physics and Variables Selection** section.

2 In the table, clear the **Solve for** check boxes for **Secondary Current Distribution (cd)** and **Transport of Diluted Species (tds)**.

Stationary 2

1 In the **Study** toolbar, click  **Study Steps** and choose **Stationary>Stationary**.

2 In the **Settings** window for **Stationary**, locate the **Physics and Variables Selection** section.

3 In the table, clear the **Solve for** check box for **Laminar Flow (spf)**.

Set up an auxiliary continuation sweep for the $E_{c\ell 1}$ parameter.

4 Click to expand the **Study Extensions** section. Select the **Auxiliary sweep** check box.



5 Click **+ Add**.

6 In the table, enter the following settings:

Parameter name	Parameter value list	Parameter unit
Ecell (Cell voltage)	range (1.25, 0.05, 1.8)	V

Solution 3 (sol3)

Change to a fully coupled direct solver to decrease solver time.

- 1 In the **Study** toolbar, click  **Show Default Solver**.
- 2 In the **Model Builder** window, expand the **Solution 3 (sol3)** node.
- 3 In the **Model Builder** window, expand the **Study 2>Solver Configurations>Solution 3 (sol3)>Stationary Solver 2** node.
- 4 Right-click **Stationary Solver 2** and choose **Fully Coupled**.
- 5 In the **Settings** window for **Fully Coupled**, locate the **General** section.
- 6 From the **Linear solver** list, choose **Direct (cd)**.
- 7 In the **Model Builder** window, click **Study 2**.
- 8 In the **Settings** window for **Study**, locate the **Study Settings** section.
- 9 Clear the **Generate default plots** check box.
- 10 In the **Study** toolbar, click  **Compute**.

You have now solved the tertiary current distribution.

- 11 In the **Label** text field, type Tertiary current distribution.

RESULTS

Add the tertiary current distribution to the polarization plot.


Global 3

- 1 In the **Model Builder** window, under **Results>Polarization Plot** right-click **Global 2** and choose **Duplicate**.
- 2 In the **Settings** window for **Global**, locate the **Data** section.
- 3 From the **Dataset** list, choose **Tertiary current distribution/Solution 3 (sol3)**.
- 4 Locate the **Legends** section. In the table, enter the following settings:



Legends
Tertiary current distribution

- 5 In the **Polarization Plot** toolbar, click  **Plot**.

Velocity


- 1 In the **Home** toolbar, click  **Add Plot Group** and choose **3D Plot Group**.
- 2 In the **Settings** window for **3D Plot Group**, type Velocity in the **Label** text field.
- 3 Locate the **Data** section. From the **Dataset** list, choose **Tertiary current distribution/ Solution 3 (sol3)**.

Slice 1

- 1 Right-click **Velocity** and choose **Slice**.
- 2 In the **Settings** window for **Slice**, click **Replace Expression** in the upper-right corner of the **Expression** section. From the menu, choose **Component 1 (comp1)>Laminar Flow> Velocity and pressure>spf.U - Velocity magnitude - m/s**.
- 3 Locate the **Plane Data** section. In the **Planes** text field, type 7.
- 4 In the **Velocity** toolbar, click  **Plot**.
- 5 Click the  **Zoom Extents** button in the **Graphics** toolbar.

Concentration


Finish the postprocessing by creating an arrow, slice, and surface plot that visualizes the concentration and flow in the cell.

- 1 In the **Home** toolbar, click  **Add Plot Group** and choose **3D Plot Group**.
- 2 In the **Settings** window for **3D Plot Group**, type Concentration in the **Label** text field.
- 3 Locate the **Data** section. From the **Dataset** list, choose **Tertiary current distribution/ Solution 3 (sol3)**.
- 4 Locate the **Plot Settings** section. Clear the **Plot dataset edges** check box.

Arrow Volume 1

- 1 Right-click **Concentration** and choose **Arrow Volume**.
- 2 In the **Settings** window for **Arrow Volume**, click **Replace Expression** in the upper-right corner of the **Expression** section. From the menu, choose **Component 1 (comp1)> Laminar Flow>Velocity and pressure>u,v,w - Velocity field**.
- 3 Locate the **Arrow Positioning** section. Find the **x grid points** subsection. In the **Points** text field, type 15.
- 4 Find the **y grid points** subsection. In the **Points** text field, type 15.
- 5 Find the **z grid points** subsection. In the **Points** text field, type 1.
- 6 Locate the **Coloring and Style** section. From the **Color** list, choose **Black**.


Arrow Volume 2

- 1 Right-click **Arrow Volume 1** and choose **Duplicate**.
- 2 In the **Settings** window for **Arrow Volume**, click to expand the **Title** section.
- 3 From the **Title type** list, choose **None**.
- 4 Locate the **Arrow Positioning** section. Find the **y grid points** subsection. In the **Points** text field, type 1.
- 5 Find the **z grid points** subsection. In the **Points** text field, type 15.
- 6 Click to expand the **Inherit Style** section. From the **Plot** list, choose **Arrow Volume 1**.
- 7 In the **Concentration** toolbar, click  **Plot**.

Concentration

In the **Model Builder** window, click **Concentration**.


Multislice 1

- 1 In the **Concentration** toolbar, click  **More Plots** and choose **Multislice**.
- 2 In the **Settings** window for **Multislice**, click **Replace Expression** in the upper-right corner of the **Expression** section. From the menu, choose **Component 1 (comp1)> Transport of Diluted Species>Species c>c - Concentration - mol/m³**.
- 3 Locate the **Multipane Data** section. Find the **x-planes** subsection. In the **Planes** text field, type 0.

Surface 1


- 1 Right-click **Concentration** and choose **Surface**.
- 2 In the **Settings** window for **Surface**, click **Replace Expression** in the upper-right corner of the **Expression** section. From the menu, choose **Component 1 (comp1)> Transport of Diluted Species>Species c>c - Concentration - mol/m³**.
- 3 Click to expand the **Inherit Style** section. From the **Plot** list, choose **Multislice 1**.

Selection 1



- 1 Right-click **Surface 1** and choose **Selection**.
- 2 In the **Settings** window for **Selection**, locate the **Selection** section.
- 3 From the **Selection** list, choose **Anode**.
- 4 In the **Concentration** toolbar, click  **Plot**.

Electrolyte Potential

- 1 In the **Model Builder** window, click **Electrolyte Potential**.
- 2 In the **Settings** window for **3D Plot Group**, locate the **Data** section.

- 3 From the **Dataset** list, choose **Tertiary current distribution/Solution 3 (sol3)**.
- 4 In the **Electrolyte Potential** toolbar, click  **Plot**.


Dimensionless current density distribution

- 1 In the **Model Builder** window, click **Dimensionless current density distribution**.
- 2 In the **Settings** window for **3D Plot Group**, locate the **Data** section.
- 3 From the **Dataset** list, choose **Tertiary current distribution/Solution 3 (sol3)**.
- 4 In the **Dimensionless current density distribution** toolbar, click  **Plot**.
- 5 Click the  **Zoom Extents** button in the **Graphics** toolbar.

Appendix — Geometry Modeling Instructions

From the **File** menu, choose **New**.

NEW

In the **New** window, click  **Blank Model**.


ADD COMPONENT

In the **Home** toolbar, click  **Add Component** and choose **3D**.

GEOMETRY I

- 1 In the **Settings** window for **Geometry**, locate the **Units** section.
- 2 From the **Length unit** list, choose **mm**.

Block 1 (blk1)

In the **Geometry** toolbar, click  **Block**.

DEFINITIONS

View 1

- 1 In the **Model Builder** window, expand the **Component 1 (comp1)>Definitions** node, then click **View 1**.
- 2 In the **Settings** window for **View**, locate the **View** section.
- 3 Select the **Wireframe rendering** check box.

GEOMETRY I

Block 1 (blk1)

- 1 In the **Model Builder** window, under **Component 1 (comp1)>Geometry 1** click **Block 1 (blk1)**.
- 2 In the **Settings** window for **Block**, locate the **Size and Shape** section.
- 3 In the **Width** text field, type 22.
- 4 In the **Depth** text field, type 8.
- 5 In the **Height** text field, type 5.
- 6 Locate the **Position** section. In the **x** text field, type -11.
- 7 In the **y** text field, type -4.


Cumulative Selections

In the **Geometry** toolbar, click  **Selections** and choose **Cumulative Selections**.

Union

- 1 Right-click **Cumulative Selections** and choose **Cumulative Selection**.
- 2 In the **Settings** window for **Selection**, type Union in the **Label** text field.


Work Plane 1 (wp1)

- 1 In the **Geometry** toolbar, click  **Work Plane**.
- 2 In the **Settings** window for **Work Plane**, locate the **Plane Definition** section.
- 3 In the **z-coordinate** text field, type -1.


Work Plane 1 (wp1)>Plane Geometry

In the **Model Builder** window, click **Plane Geometry**.

Work Plane 1 (wp1)>Square 1 (sq1)


- 1 In the **Work Plane** toolbar, click  **Square**.
- 2 In the **Settings** window for **Square**, locate the **Size** section.
- 3 In the **Side length** text field, type 2.
- 4 Locate the **Position** section. In the **xw** text field, type -6.
- 5 In the **yw** text field, type -1.
- 6 Locate the **Selections of Resulting Entities** section. Select the **Resulting objects selection** check box.

Work Plane 1 (wp1)>Fillet 1 (fil1)

- 1 In the **Work Plane** toolbar, click  **Fillet**.

- 2 On the object **sq1**, select Points 1–4 only.
- 3 In the **Settings** window for **Fillet**, locate the **Radius** section.
- 4 In the **Radius** text field, type 0.5.
- 5 Locate the **Selections of Resulting Entities** section. Select the **Resulting objects selection** check box.

Work Plane 1 (wp1)>Array 1 (arr1)

- 1 In the **Work Plane** toolbar, click  **Transforms** and choose **Array**.
- 2 Select the object **fill** only.
- 3 In the **Settings** window for **Array**, locate the **Size** section.
- 4 In the **xw size** text field, type 3.
- 5 Locate the **Displacement** section. In the **xw** text field, type 5.


Extrude 1 (ext1)

- 1 In the **Model Builder** window, expand the **Component 1 (comp1)>Geometry 1>Work Plane 1 (wp1)>View 2** node.
- 2 Right-click **Geometry 1** and choose **Extrude**.
- 3 In the **Settings** window for **Extrude**, locate the **Distances** section.
- 4 In the table, enter the following settings:

Distances (mm)
6

- 5 Locate the **Selections of Resulting Entities** section. Find the **Cumulative selection** subsection. From the **Contribute to** list, choose **Union**.


Work Plane 2 (wp2)

- 1 In the **Geometry** toolbar, click  **Work Plane**.
- 2 In the **Settings** window for **Work Plane**, locate the **Plane Definition** section.
- 3 From the **Plane** list, choose **yz-plane**.
- 4 In the **x-coordinate** text field, type 11.

Work Plane 2 (wp2)>Plane Geometry


In the **Model Builder** window, click **Plane Geometry**.

Work Plane 2 (wp2)>Square 1 (sq1)

- 1 In the **Work Plane** toolbar, click  **Square**.
- 2 In the **Settings** window for **Square**, locate the **Size** section.

- 3 In the **Side length** text field, type 2.
- 4 Locate the **Position** section. From the **Base** list, choose **Center**.
- 5 Locate the **Selections of Resulting Entities** section. Select the **Resulting objects selection** check box.

Work Plane 2 (wp2)>Fillet 1 (fil1)

- 1 In the **Work Plane** toolbar, click  **Fillet**.
- 2 On the object **sq1**, select Points 1–4 only.
- 3 In the **Settings** window for **Fillet**, locate the **Radius** section.
- 4 In the **Radius** text field, type 0.5.


Extrude 2 (ext2)

- 1 In the **Model Builder** window, expand the **Component 1 (comp1)>Geometry 1>Work Plane 2 (wp2)>View 3** node.
- 2 Right-click **Geometry 1** and choose **Extrude**.
- 3 In the **Settings** window for **Extrude**, locate the **Distances** section.
- 4 In the table, enter the following settings:


Distances (mm)
22

- 5 Select the **Reverse direction** check box.
- 6 Locate the **Selections of Resulting Entities** section. Find the **Cumulative selection** subsection. From the **Contribute to** list, choose **Union**.


Union 1 (uni1)

- 1 In the **Geometry** toolbar, click  **Booleans and Partitions** and choose **Union**.
- 2 In the **Settings** window for **Union**, locate the **Union** section.
- 3 From the **Input objects** list, choose **Union**.

Delete Entities 1 (dell)


- 1 Right-click **Geometry 1** and choose **Delete Entities**.
- 2 In the **Settings** window for **Delete Entities**, locate the **Entities or Objects to Delete** section.
- 3 From the **Geometric entity level** list, choose **Domain**.
- 4 Click the  **Zoom Extents** button in the **Graphics** toolbar.

5 On the object **uni1**, select Domains 1 and 16 only.

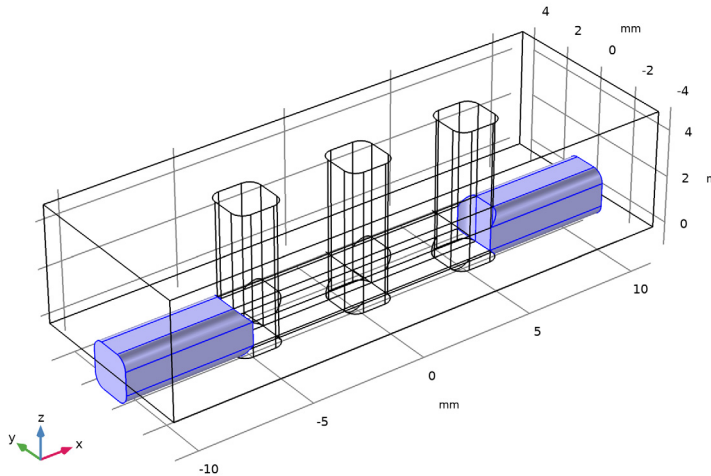

6 Locate the **Selections of Resulting Entities** section. Select the **Resulting objects selection** check box.

Union 2 (uni2)

- 1 In the **Geometry** toolbar, click  **Booleans and Partitions** and choose **Union**.
- 2 In the **Settings** window for **Union**, locate the **Union** section.
- 3 From the **Input objects** list, choose **Delete Entities 1**.

Difference 1 (dif1)

- 1 In the **Geometry** toolbar, click  **Booleans and Partitions** and choose **Difference**.
- 2 Select the object **blk1** only.


Union 2 (uni2)

- 1 In the **Model Builder** window, click **Union 2 (uni2)**.
- 2 In the **Settings** window for **Union**, locate the **Selections of Resulting Entities** section.
- 3 Select the **Resulting objects selection** check box.


Difference 1 (dif1)

- 1 In the **Model Builder** window, click **Difference 1 (dif1)**.
- 2 In the **Settings** window for **Difference**, locate the **Difference** section.
- 3 From the **Objects to subtract** list, choose **Union 2**.

Box Selection 1 (boxsell)

- 1 In the **Geometry** toolbar, click  **Selections** and choose **Box Selection**.
- 2 In the **Settings** window for **Box Selection**, locate the **Geometric Entity Level** section.
- 3 From the **Level** list, choose **Boundary**.
- 4 Locate the **Box Limits** section. In the **x minimum** text field, type -60.
- 5 In the **x maximum** text field, type 60.
- 6 In the **y minimum** text field, type -2.
- 7 In the **y maximum** text field, type 2.

Cathodes

- 1 In the **Geometry** toolbar, click  **Selections** and choose **Explicit Selection**.
- 2 In the **Settings** window for **Explicit Selection**, type Cathodes in the **Label** text field.
- 3 Locate the **Entities to Select** section. From the **Geometric entity level** list, choose **Boundary**.

Anode

- 1 In the **Model Builder** window, under **Component 1 (comp1)>Geometry 1** click **Box Selection 1 (boxsell)**.
- 2 In the **Settings** window for **Box Selection**, type Anode in the **Label** text field.
- 3 Locate the **Output Entities** section. From the **Include entity if** list, choose **Entity inside box**.



Cathodes (sell)

- 1 In the **Model Builder** window, click **Cathodes (sell)**.
- 2 In the **Settings** window for **Explicit Selection**, locate the **Entities to Select** section.
- 3 Find the **Entities to select** subsection. Select the **Activate Selection** toggle button.
- 4 On the object **difl**, select Boundaries 2 and 5 only.

Anode (boxsell), Cathodes (sell)



- 1 In the **Model Builder** window, under **Component 1 (comp1)>Geometry 1**, Ctrl-click to select **Anode (boxsell)** and **Cathodes (sell)**.
- 2 Right-click and choose **Move Down**.

Inlet

- 1 In the **Geometry** toolbar, click  **Selections** and choose **Explicit Selection**.
- 2 In the **Settings** window for **Explicit Selection**, type Inlet in the **Label** text field.
- 3 Click the  **Zoom Extents** button in the **Graphics** toolbar.

- 4 Locate the **Entities to Select** section. From the **Geometric entity level** list, choose **Boundary**.
- 5 On the object **fin**, select Boundary 1 only.

Outlet

- 1 In the **Geometry** toolbar, click  **Selections** and choose **Explicit Selection**.
- 2 In the **Settings** window for **Explicit Selection**, type Outlet in the **Label** text field.
- 3 Locate the **Entities to Select** section. From the **Geometric entity level** list, choose **Boundary**.
- 4 On the object **fin**, select Boundary 52 only.
- 5 In the **Geometry** toolbar, click  **Build All**.