

DC Glow Discharge

Introduction

DC glow discharges in the low-pressure regime have long been used for gas lasers and fluorescent lamps. DC discharges are attractive to study because the solution is time independent. This model shows how to use the **Plasma** interface to set up an analysis of a positive column. The discharge is sustained by emission of secondary electrons at the cathode.

Model Definition

The DC discharge consists of two electrodes, one powered (the anode) and one grounded (the cathode). The positive column is coupled to an external circuit:




Figure 1: Schematic of the DC discharge and external circuit.

DOMAIN EQUATIONS

The electron density and mean electron energy are computed by solving a pair of driftdiffusion equations for the electron density and mean electron energy. Convection of electrons due to fluid motion is neglected. For detailed information on electron transport see *Theory for the Drift Diffusion Interface* in the *Plasma Module User's Guide*.

$$\frac{\partial}{\partial t}(n_e) + \nabla \cdot \left[-n_e(\mu_e \bullet \mathbf{E}) - \mathbf{D}_e \bullet \nabla n_e \right] = R_e$$
$$\frac{\partial}{\partial t}(n_\epsilon) + \nabla \cdot \left[-n_\epsilon(\mu_\epsilon \bullet \mathbf{E}) - \mathbf{D}_\epsilon \bullet \nabla n_\epsilon \right] + \mathbf{E} \cdot \Gamma_e = R_\epsilon$$

where:

$$\Gamma_e = -(\mu_e \bullet \mathbf{E})n_e - \mathbf{D}_e \bullet \nabla n_e$$

2 | DC GLOW DISCHARGE

The electron source R_e and the energy loss due to inelastic collisions R_{ε} are defined later. The electron diffusivity, energy mobility and energy diffusivity are computed from the electron mobility using:

$$\mathbf{D}_{e} = \mu_{e}T_{e}, \mu_{\varepsilon} = \left(\frac{5}{3}\right)\mu_{e}, \mathbf{D}_{\varepsilon} = \mu_{\varepsilon}T_{e}$$

The source coefficients in the above equations are determined by the plasma chemistry using rate coefficients. Suppose that there are M reactions which contribute to the growth or decay of electron density and P inelastic electron-neutral collisions. In general P >> M. In the case of rate coefficients, the electron source term is given by:

• •

$$R_e = \sum_{j=1}^{M} x_j k_j N_n n_e$$

where x_j is the mole fraction of the target species for reaction j, k_j is the rate coefficient for reaction j (m³/s), and N_n is the total neutral number density (1/m³). For DC discharges it is better practice to use Townsend coefficients instead of rate coefficients to define reaction rates. Townsend coefficients provide a better description of what happens in the cathode fall region Ref 1. When Townsend coefficients are used, the electron source term is given by:

$$R_e = \sum_{j=1}^{M} x_j \alpha_j N_n | \Gamma_e$$

where α_j is the Townsend coefficient for reaction j (m²) and Γ_e is the electron flux as defined above $(1/(m^2 \cdot s))$. Townsend coefficients can increase the stability of the numerical scheme when the electron flux is field driven as is the case with DC discharges. The electron energy loss is obtained by summing the collisional energy loss over all reactions:

$$R_{\varepsilon} = \sum_{j=1}^{P} x_j k_j N_n n_e \Delta \varepsilon_j$$

where $\Delta \varepsilon_j$ is the energy loss from reaction j (V). The rate coefficients may be computed from cross section data by the following integral:

$$k_k = \gamma \int_0^\infty \varepsilon \sigma_k(\varepsilon) f(\varepsilon) d\varepsilon$$

where $\gamma = (2q/m_e)^{1/2} (C^{1/2}/kg^{1/2})$, m_e is the electron mass (kg), ε is energy (V), σ_k is the collision cross section (m²) and *f* is the electron energy distribution function. In this case a Maxwellian EEDF is assumed. When Townsend coefficients are used, the electron energy loss is taken as:

$$R_{\varepsilon} = \sum_{j=1}^{P} x_j \alpha_j N_n |\Gamma_e| \Delta \varepsilon_j$$

For non-electron species, the following equation is solved for the mass fraction of each species. For detailed information on the transport of the non-electron species see *Theory* for the Heavy Species Transport Interface in the Plasma Module User's Guide.

$$\rho \frac{\partial}{\partial t} (w_k) + \rho (\mathbf{u} \cdot \nabla) w_k = \nabla \cdot \mathbf{j}_k + R_k$$

The electrostatic field is computed using the following equation:

$$-\nabla \cdot \varepsilon_0 \varepsilon_r \nabla V = \rho$$

The space charge density ρ is automatically computed based on the plasma chemistry specified in the model using the formula:

$$\rho = q \left(\sum_{k=1}^{N} Z_k n_k - n_e \right)$$

For detailed information about electrostatics see *Theory for the Electrostatics Interface* in the *Plasma Module User's Guide*.

BOUNDARY CONDITIONS

Unlike RF discharges, the mechanism for sustaining the discharge is emission of secondary electrons from the cathode. An electron is emitted from the cathode surface with a specified probability when struck by an ion. These electrons are then accelerated by the strong electric field close to the cathode where they acquire enough energy to initiate ionization. The net result is a rapid increase in the electron density close to the cathode in a region often known as the *cathode fall* or *Crookes dark space*.

Electrons are lost to the wall due to random motion within a few mean free paths of the wall and gained due to secondary emission effects, resulting in the following boundary condition for the electron flux:

$$\mathbf{n} \cdot \Gamma_e = \left(\frac{1}{2} \mathbf{v}_{e, \text{th}} n_e\right) - \sum_p \gamma_p(\Gamma_p \cdot \mathbf{n})$$
(1)

and the electron energy flux:

$$\mathbf{n} \cdot \Gamma_{\varepsilon} = \left(\frac{5}{6} \mathbf{v}_{e, \text{th}} n_{\varepsilon}\right) - \sum_{p} \varepsilon_{p} \gamma_{p} (\Gamma_{p} \cdot \mathbf{n})$$
(2)

The second term on the right-hand side of Equation 1 is the gain of electrons due to secondary emission effects, γ_p being the secondary emission coefficient. The second term in Equation 2 is the secondary emission energy flux, ε_p being the mean energy of the secondary electrons. For the heavy species, ions are lost to the wall due to surface reactions and the fact that the electric field is directed toward the wall:

$$\mathbf{n} \cdot \mathbf{j}_k = M_w R_k + M_w c_k Z \mu_k (\mathbf{E} \cdot \mathbf{n}) [Z_k \mu_k (\mathbf{E} \cdot \mathbf{n}) > 0]$$

PLASMA CHEMISTRY

Argon is one of the simplest mechanisms to implement at low pressures. The electronically excited states can be lumped into a single species, which results in a chemical mechanism consisting of only 3 species and 7 reactions (electron impact cross-sections are obtained form Ref. 2):

REACTION	FORMULA	ТҮРЕ	$\Delta\epsilon(eV)$
I	e+Ar=>e+Ar	Elastic	0
2	e+Ar=>e+Ars	Excitation	11.5
3	e+Ars=>e+Ar	Superelastic	-11.5
4	e+Ar=>2e+Ar+	Ionization	15.8
5	e+Ars=>2e+Ar+	Ionization	4.24
6	Ars+Ars=>e+Ar+Ar+	Penning ionization	-
7	Ars+Ar=>Ar+Ar	Metastable quenching	-

TABLE I: TABLE OF COLLISIONS AND REACTIONS MODELED.

In this discharge, the electron density and density of excited species is relatively low so stepwise ionization is not as important as in high density discharges. In addition to volumetric reactions, the following surface reactions are implemented:

TABLE 2: TABLE OF SURFACE REACTIONS.

REACTION	FORMULA	STICKING COEFFICIENT
I	Ars=>Ar	1
2	Ar+=>Ar	1

When a metastable argon atom makes contact with the wall, it reverts to the ground state argon atom with some probability (the sticking coefficient).

Results and Discussion

The electric potential, electron density and mean electron energy are all quantities of interest. Most of the variation in each of these quantities occurs along the axial length of the column. Figure 2 plots the electron density in the column. The electron density peaks in the region between the cathode fall and positive column. This region is sometimes referred to as Faraday dark space. The electron density also decreases rapidly in the radial direction. The is caused by diffusive loss of electrons to the outer walls of the column where they accumulate a surface charge. The buildup of negative charge leads to a positive potential in the center of the column with respect to the walls.

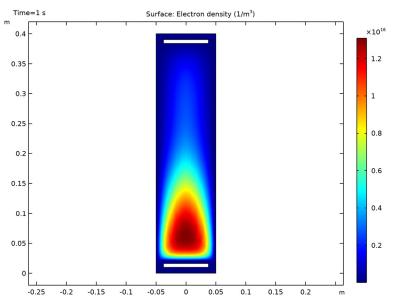


Figure 2: Surface plot of electron density inside the column.

In Figure 4 the electric potential is plotted along the axial length of the column. Notice that the potential profile is markedly different from the linear drop in potential, which results in the absence of the plasma. The strong electric field in the cathode region can lead to high energy ion bombardment of the cathode. Heating of the cathode surface occurs,

which may in turn lead to thermal electron emission where additional electrons are emitted from the cathode surface.

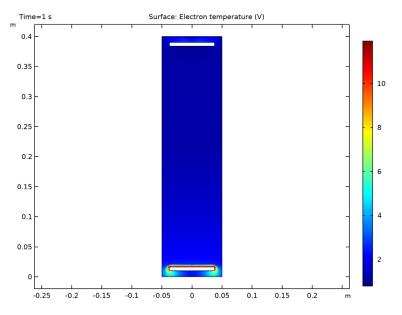


Figure 3: Plot of electron "temperature" along the axial length of the positive column.

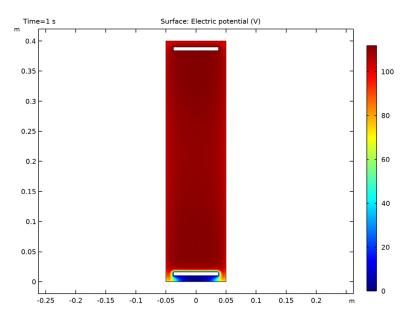


Figure 4: Plot of the electric potential along the axial length of the positive column.

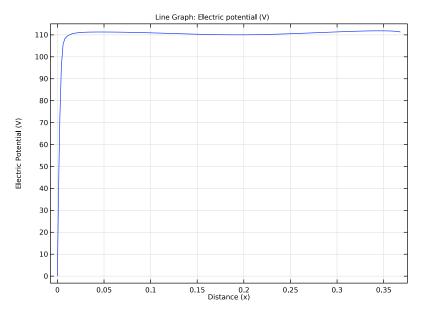


Figure 5: Plot of electric potential along the axial length of the positive column.

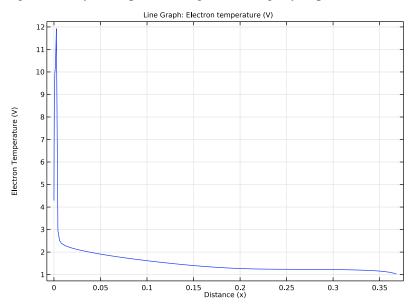


Figure 6: Plot of the electron temperature along the axial length of the positive column.

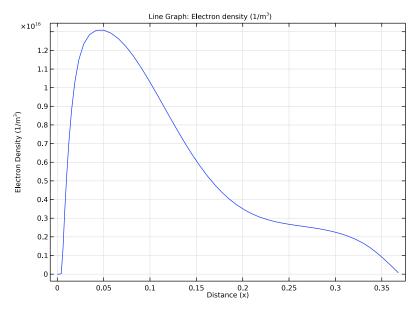


Figure 7: Plot of the electron density along the axial length of the positive column.

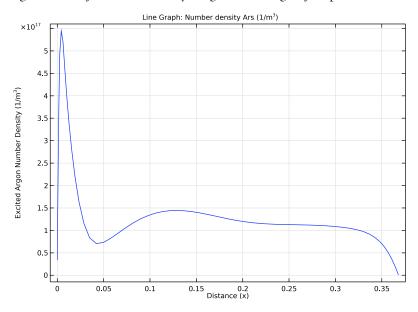


Figure 8: Plot of the number density of excited argon atoms.

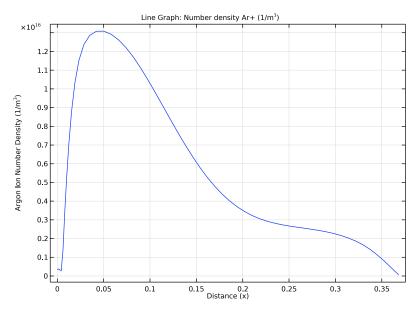


Figure 9: Plot of the number density of argon ions.

Reference

1. M.A. Lieberman and A.J. Lichtenberg, *Principles of Plasma Discharges and Materials Processing*, John Wiley & Sons, 2005.

2. Phelps database, www.lxcat.net, retrieved 2017.

Application Library path: Plasma_Module/Direct_Current_Discharges/
positive_column_2d

Modeling Instructions

From the File menu, choose New.

NEW

In the New window, click 🙆 Model Wizard.

MODEL WIZARD

- I In the Model Wizard window, click 📥 2D Axisymmetric.
- 2 In the Select Physics tree, select Plasma>Plasma (plas).
- 3 Click Add.
- 4 Click 🔿 Study.
- 5 In the Select Study tree, select General Studies>Time Dependent.
- 6 Click M Done.

GEOMETRY I

Rectangle 1 (r1)

I In the Geometry toolbar, click Rectangle.

- 2 In the Settings window for Rectangle, locate the Size and Shape section.
- 3 In the Width text field, type 0.05.
- 4 In the **Height** text field, type 0.4.

Rectangle 2 (r2)

- I In the Geometry toolbar, click Rectangle.
- 2 In the Settings window for Rectangle, locate the Size and Shape section.
- 3 In the Width text field, type 0.0375.
- 4 In the Height text field, type 6e-3.
- **5** Locate the **Position** section. In the **z** text field, type **0.01**.

Rectangle 3 (r3)

- I In the Geometry toolbar, click 📃 Rectangle.
- 2 In the Settings window for Rectangle, locate the Size and Shape section.
- **3** In the **Width** text field, type **0.0375**.
- 4 In the **Height** text field, type 6e-3.
- 5 Locate the Position section. In the z text field, type 0.384.

Compose I (col)


- I In the Geometry toolbar, click P Booleans and Partitions and choose Compose.
- 2 Select the object rl only.
- 3 In the Settings window for Compose, locate the Compose section.
- 4 In the **Set formula** text field, type r1-r2-r3.

Line Segment I (Is I)

- I In the Geometry toolbar, click 🚧 More Primitives and choose Line Segment.
- 2 In the Settings window for Line Segment, locate the Starting Point section.
- **3** From the **Specify** list, choose **Coordinates**.
- 4 Locate the Endpoint section. From the Specify list, choose Coordinates.
- **5** Locate the **Starting Point** section. In the **z** text field, type **0.02**.
- 6 Locate the **Endpoint** section. In the **r** text field, type 0.0375.
- 7 In the z text field, type 0.02.
- 8 Click 🟢 Build All Objects.

Mesh Control Edges 1 (mcel)

- I In the Geometry toolbar, click 🏠 Virtual Operations and choose Mesh Control Edges.
- 2 On the object fin, select Boundary 7 only.

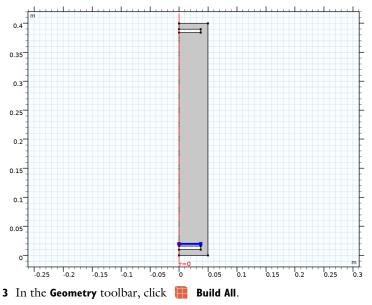

DEFINITIONS

Variables I

- I In the Home toolbar, click $\partial =$ Variables and choose Local Variables.
- 2 In the Settings window for Variables, locate the Variables section.

Name	Expression	Unit	Description
mueN	1E25[1/(m*V*s)]	I/(V·m·s)	Reduced electron mobility
V0	125[V]	V	Applied voltage
Wf	5		Work function
p0	0.5[torr]	Pa	Gas pressure

3 In the table, enter the following settings:

Cathode

- I In the **Definitions** toolbar, click **here Explicit**.
- 2 Right-click Explicit I and choose Rename.
- 3 In the Rename Explicit dialog box, type Cathode in the New label text field.
- 4 Click OK.
- 5 In the Settings window for Explicit, locate the Input Entities section.
- 6 From the Geometric entity level list, choose Boundary.
- 7 Select Boundaries 3, 5, and 10 only.

Anode

- I In the **Definitions** toolbar, click **here Explicit**.
- 2 In the Model Builder window, right-click Explicit 2 and choose Rename.
- 3 In the Rename Explicit dialog box, type Anode in the New label text field.
- 4 Click OK.
- 5 In the Settings window for Explicit, locate the Input Entities section.
- 6 From the Geometric entity level list, choose Boundary.
- 7 Select Boundaries 6, 8, and 11 only.

Walls


- I In the Definitions toolbar, click 🐚 Explicit.
- 2 Right-click Explicit 3 and choose Rename.
- 3 In the Rename Explicit dialog box, type Walls in the New label text field.
- 4 Click OK.
- 5 In the Settings window for Explicit, locate the Input Entities section.
- 6 From the Geometric entity level list, choose Boundary.
- 7 Select Boundaries 2, 9, and 12 only.

All Walls

- I In the Definitions toolbar, click 🗞 Explicit.
- 2 In the Model Builder window, right-click Explicit 4 and choose Rename.
- 3 In the Rename Explicit dialog box, type All Walls in the New label text field.
- 4 Click OK.
- 5 In the Settings window for Explicit, locate the Input Entities section.
- 6 From the Geometric entity level list, choose Boundary.
- 7 Select Boundaries 2, 3, 5, 6, and 8–12 only.

Non Cathode Walls

- I In the Definitions toolbar, click 🗞 Explicit.
- 2 Right-click Explicit 5 and choose Rename.
- 3 In the Rename Explicit dialog box, type Non Cathode Walls in the New label text field.
- 4 Click OK.
- 5 In the Settings window for Explicit, locate the Input Entities section.
- 6 From the Geometric entity level list, choose Boundary.
- 7 Select Boundaries 2, 6, 8, 9, 11, and 12 only.

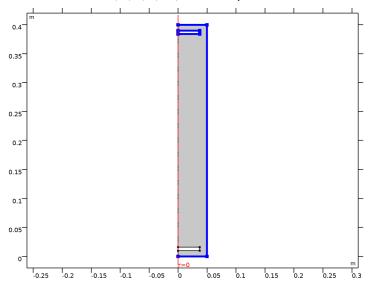

PLASMA (PLAS)

Cross Section Import 1

- I In the Model Builder window, under Component I (compl) right-click Plasma (plas) and choose Global>Cross Section Import.
- 2 In the Settings window for Cross Section Import, locate the Cross Section Import section.
- 3 Click Browse.
- **4** Browse to the model's Application Libraries folder and double-click the file Ar_xsecs.txt.
- 5 Click Import.
- 6 In the Model Builder window, click Plasma (plas).
- 7 In the Settings window for Plasma, locate the Plasma Properties section.
- 8 Select the Use reduced electron transport properties check box.

Plasma Model I

- I In the Model Builder window, click Plasma Model I.
- 2 In the Settings window for Plasma Model, locate the Model Inputs section.
- **3** In the p_A text field, type p0.
- **4** Locate the **Electron Density and Energy** section. In the $\mu_e N_n$ text field, type mueN.

You change the way the source coefficients for electronic excitation and ionization are specified. By default, COMSOL computes rate coefficients based on the cross section data you supplied. For DC discharges, Townsend coefficients provide a more accurate description of the cathode fall region so they should be used. The Townsend coefficients are typically computed using the **Boltzmann Equation**, **Two-Term Approximation** interface.

2: e+Ar=>e+Ars

- I In the Model Builder window, click 2: e+Ar=>e+Ars.
- 2 In the Settings window for Electron Impact Reaction, locate the Collision section.
- **3** From the Specify reaction using list, choose Use lookup table.
- 4 Locate the Reaction Parameters section. From the Rate constant form list, choose Townsend coefficient.
- 5 Find the Townsend coefficient data subsection. Click 📂 Load from File.
- 6 Browse to the model's Application Libraries folder and double-click the file town2.txt.

4: e+Ar=>2e+Ar+

I In the Model Builder window, click 4: e+Ar=>2e+Ar+.

- 2 In the Settings window for Electron Impact Reaction, locate the Collision section.
- **3** From the **Specify reaction using** list, choose **Use lookup table**.
- 4 Locate the Reaction Parameters section. From the Rate constant form list, choose Townsend coefficient.
- 5 Find the Townsend coefficient data subsection. Click 📂 Load from File.
- 6 Browse to the model's Application Libraries folder and double-click the file town4.txt.

Reaction I

- I In the **Physics** toolbar, click **Domains** and choose **Reaction**.
- 2 In the Settings window for Reaction, locate the Reaction Formula section.
- 3 In the Formula text field, type Ars+Ars=>e+Ar+Ar+.
- **4** Locate the **Reaction Parameters** section. In the k^{f} text field, type **3.734E8**.

Reaction 2

- I In the Physics toolbar, click 🔵 Domains and choose Reaction.
- 2 In the Settings window for Reaction, locate the Reaction Formula section.
- **3** In the **Formula** text field, type Ars+Ar=>Ar+Ar.
- **4** Locate the **Reaction Parameters** section. In the k^{f} text field, type 1807.

When solving a reacting flow problem there always needs to be one species which is selected to fulfill the mass constraint. This should be taken as the species with the largest mass fraction.

Species: Ar

- I In the Model Builder window, click Species: Ar.
- 2 In the Settings window for Species, locate the Species Formula section.
- 3 Select the From mass constraint check box.
- 4 Locate the General Parameters section. From the Preset species data list, choose Ar.

Species: Ars

- I In the Model Builder window, click Species: Ars.
- 2 In the Settings window for Species, locate the General Parameters section.
- **3** From the **Preset species data** list, choose **Ar**.

When solving a plasma problem the plasma must be initially charge neutral. COMSOL automatically computes the initial concentration of a selected ionic species such that the electroneutrality constraint is satisfied.

Species: Ar+

- I In the Model Builder window, click Species: Ar+.
- 2 In the Settings window for Species, locate the Species Formula section.
- **3** Select the **Initial value from electroneutrality constraint** check box.
- 4 Locate the General Parameters section. From the Preset species data list, choose Ar.

Wall I

- I In the **Physics** toolbar, click **Boundaries** and choose **Wall**.
- 2 In the Settings window for Wall, locate the Boundary Selection section.
- 3 From the Selection list, choose All Walls.

Ground I

- I In the Physics toolbar, click Boundaries and choose Ground.
- 2 In the Settings window for Ground, locate the Boundary Selection section.
- **3** From the **Selection** list, choose **Cathode**.

Metal Contact 1

- I In the Physics toolbar, click Boundaries and choose Metal Contact.
- 2 In the Settings window for Metal Contact, locate the Boundary Selection section.
- 3 From the Selection list, choose Anode.
- **4** Locate the **Terminal** section. In the V_0 text field, type V0.
- 5 Locate the Circuit Settings section. From the Circuit type list, choose Series RC circuit.

Dielectric Contact I

- I In the Physics toolbar, click Boundaries and choose Dielectric Contact.
- 2 In the Settings window for Dielectric Contact, locate the Boundary Selection section.
- 3 From the Selection list, choose Walls.

Now you add a surface reaction which describes the neutralization of Argon ions on the electrode. Secondary emission of electrons is required to sustain the discharge, so you enter the emission coefficient and an estimate of the mean energy of the secondary electrons based on the ionization energy threshold and the work function of the surface.

Surface Reaction 1

- I In the Physics toolbar, click Boundaries and choose Surface Reaction.
- 2 In the Settings window for Surface Reaction, locate the Reaction Formula section.
- 3 In the Formula text field, type Ar+=>Ar.

4 Locate the Boundary Selection section. From the Selection list, choose Cathode.

Make the secondary emission coefficient 0.25 and set the mean energy of the secondary electrons to be the ionization energy (given by the expression plas.de_4) minus twice the work function of the electrode.

- **5** Locate the **Secondary Emission Parameters** section. In the γ_i text field, type 0.25.
- **6** In the ε_i text field, type plas.de_4-2*Wf.

Surface Reaction 2

- I In the Physics toolbar, click Boundaries and choose Surface Reaction.
- 2 In the Settings window for Surface Reaction, locate the Reaction Formula section.
- **3** In the **Formula** text field, type Ar+=>Ar.
- 4 Locate the Boundary Selection section. From the Selection list, choose Non Cathode Walls.


Surface Reaction 3

- I In the Physics toolbar, click Boundaries and choose Surface Reaction.
- 2 In the Settings window for Surface Reaction, locate the Reaction Formula section.
- 3 In the Formula text field, type Ars=>Ar.
- 4 Locate the Boundary Selection section. From the Selection list, choose All Walls.

MESH I

Edge I

I In the Mesh toolbar, click A Edge.

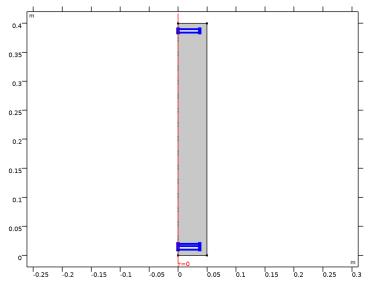

2 Select Boundaries 3, 5, 6, 8, 10, 11, and 14 only.

Size I

I Right-click Edge I and choose Size.

2 In the Settings window for Size, locate the Element Size section.

3 From the Predefined list, choose Extremely fine.

4 Click the **Custom** button.

5 Locate the Element Size Parameters section. Select the Maximum element size check box.

6 In the associated text field, type 0.001.

7 Click the **Zoom Extents** button in the **Graphics** toolbar.

Free Triangular 1

In the Mesh toolbar, click 📉 Free Triangular.

Size I

- I Right-click Free Triangular I and choose Size.
- 2 In the Settings window for Size, locate the Element Size section.
- 3 From the Predefined list, choose Extra fine.

Boundary Layers 1

In the Mesh toolbar, click **Boundary Layers**.

Boundary Layer Properties

- I In the Model Builder window, click Boundary Layer Properties.
- **2** In the Settings window for Boundary Layer Properties, locate the Boundary Selection section.
- 3 From the Selection list, choose All Walls.
- **4** Locate the **Boundary Layer Properties** section. In the **Number of boundary layers** text field, type **4**.
- 5 Click 📗 Build All.

STUDY I

Step 1: Time Dependent

- I In the Model Builder window, under Study I click Step I: Time Dependent.
- 2 In the Settings window for Time Dependent, locate the Study Settings section.
- **3** In the **Output times** text field, type **0**.
- 4 Click Range.
- 5 In the Range dialog box, choose Number of values from the Entry method list.
- 6 In the Start text field, type -8.
- 7 In the **Stop** text field, type 0.
- 8 In the Number of values text field, type 21.
- 9 From the Function to apply to all values list, choose explo(x) –
 Exponential function (base 10).
- IO Click Add.
- II In the **Home** toolbar, click **= Compute**.

RESULTS

Study I/Solution I (soll)

In the Model Builder window, expand the Results>Datasets node, then click Study I/ Solution I (soll).

Selection

- I In the Results toolbar, click 🐐 Attributes and choose Selection.
- 2 In the Settings window for Selection, locate the Geometric Entity Selection section.
- 3 From the Geometric entity level list, choose Boundary.
- 4 From the Selection list, choose All Walls.

Cut Line 2D I

- I In the **Results** toolbar, click \frown **Cut Line 2D**.
- 2 In the Settings window for Cut Line 2D, locate the Line Data section.
- **3** In row **Point I**, set **Z** to **0.016**.
- 4 In row **Point 2**, set **R** to 0 and **z** to 0.384.

Mirror 2D I

In the **Results** toolbar, click **More Datasets** and choose **Mirror 2D**.

Electron Density (plas)

- I In the Model Builder window, click Electron Density (plas).
- 2 In the Settings window for 2D Plot Group, locate the Data section.
- 3 From the Dataset list, choose Mirror 2D I.
- **4** In the **Electron Density (plas)** toolbar, click **O Plot**.
- **5** Click the **Com Extents** button in the **Graphics** toolbar.

Electron Temperature (plas)

- I In the Model Builder window, click Electron Temperature (plas).
- 2 In the Settings window for 2D Plot Group, locate the Data section.
- 3 From the Dataset list, choose Mirror 2D I.
- **4** In the **Electron Temperature (plas)** toolbar, click **OD Plot**.
- **5** Click the **F Zoom Extents** button in the **Graphics** toolbar.

Electric Potential (plas)

- I In the Model Builder window, click Electric Potential (plas).
- 2 In the Settings window for 2D Plot Group, locate the Data section.
- 3 From the Dataset list, choose Mirror 2D I.
- **4** In the **Electric Potential (plas)** toolbar, click **I** Plot.
- **5** Click the **Com Extents** button in the **Graphics** toolbar.

Electric Potential on Axis

- I In the Home toolbar, click 📠 Add Plot Group and choose ID Plot Group.
- 2 In the Settings window for ID Plot Group, type Electric Potential on Axis in the Label text field.
- 3 Locate the Data section. From the Time selection list, choose Last.
- 4 Locate the Plot Settings section. Select the x-axis label check box.

- **5** In the associated text field, type **Distance** (x).
- 6 Select the y-axis label check box.
- 7 In the associated text field, type Electric Potential (V).
- 8 Locate the Data section. From the Dataset list, choose Cut Line 2D I.

Line Graph I

- I Right-click Electric Potential on Axis and choose Line Graph.
- 2 In the Settings window for Line Graph, click Replace Expression in the upper-right corner of the y-Axis Data section. From the menu, choose Component I (compl)>Plasma> Electric>V Electric potential V.

Electric Potential on Axis

- I In the Model Builder window, click Electric Potential on Axis.
- 2 In the Electric Potential on Axis toolbar, click 💽 Plot.
- **3** Click the \leftarrow **Zoom Extents** button in the **Graphics** toolbar.

Electron Temperature on Axis

- I In the Home toolbar, click 🚛 Add Plot Group and choose ID Plot Group.
- 2 In the Settings window for ID Plot Group, type Electron Temperature on Axis in the Label text field.
- 3 Locate the Data section. From the Time selection list, choose Last.
- 4 Locate the Plot Settings section. Select the x-axis label check box.
- **5** In the associated text field, type **Distance** (x).
- 6 Select the y-axis label check box.
- 7 In the associated text field, type Electron Temperature (V).
- 8 Locate the Data section. From the Dataset list, choose Cut Line 2D I.

Line Graph I

- I Right-click Electron Temperature on Axis and choose Line Graph.
- 2 In the Settings window for Line Graph, locate the y-Axis Data section.
- **3** In the **Expression** text field, type plas.Te.
- **4** In the **Electron Temperature on Axis** toolbar, click **O** Plot.
- **5** Click the $4 \rightarrow$ **Zoom Extents** button in the **Graphics** toolbar.

Electron Density on Axis

I In the Home toolbar, click 🚛 Add Plot Group and choose ID Plot Group.

- 2 In the Settings window for ID Plot Group, type Electron Density on Axis in the Label text field.
- 3 Locate the Data section. From the Time selection list, choose Last.
- 4 Locate the **Plot Settings** section. Select the **x-axis label** check box.
- **5** In the associated text field, type **Distance** (x).
- 6 Select the y-axis label check box.
- 7 In the associated text field, type Electron Density (1/m³).
- 8 Locate the Data section. From the Dataset list, choose Cut Line 2D I.

Line Graph I

- I Right-click Electron Density on Axis and choose Line Graph.
- 2 In the Settings window for Line Graph, locate the y-Axis Data section.
- 3 In the Expression text field, type plas.ne.
- **4** In the **Electron Density on Axis** toolbar, click **O Plot**.
- **5** Click the $4 \rightarrow$ **Zoom Extents** button in the **Graphics** toolbar.

Excited Argon Number Density on Axis

- I In the Home toolbar, click 🚛 Add Plot Group and choose ID Plot Group.
- 2 In the Settings window for ID Plot Group, type Excited Argon Number Density on Axis in the Label text field.
- 3 Locate the Data section. From the Time selection list, choose Last.
- 4 Locate the Plot Settings section. Select the x-axis label check box.
- **5** In the associated text field, type **Distance** (x).
- 6 Select the y-axis label check box.
- 7 In the associated text field, type Excited Argon Number Density (1/m³).
- 8 Locate the Data section. From the Dataset list, choose Cut Line 2D 1.

Line Graph 1

- I Right-click Excited Argon Number Density on Axis and choose Line Graph.
- 2 In the Settings window for Line Graph, locate the y-Axis Data section.
- **3** In the **Expression** text field, type plas.n_wArs.
- 4 In the Excited Argon Number Density on Axis toolbar, click 🗿 Plot.
- **5** Click the \leftrightarrow **Zoom Extents** button in the **Graphics** toolbar.

Argon Ion Number Density on Axis

- I In the Home toolbar, click 📠 Add Plot Group and choose ID Plot Group.
- 2 In the Settings window for ID Plot Group, type Argon Ion Number Density on Axis in the Label text field.
- 3 Locate the Data section. From the Time selection list, choose Last.
- 4 Locate the Plot Settings section. Select the x-axis label check box.
- **5** In the associated text field, type **Distance** (x).
- 6 Select the y-axis label check box.
- 7 In the associated text field, type Argon Ion Number Density (1/m³).
- 8 Locate the Data section. From the Dataset list, choose Cut Line 2D I.

Line Graph I

- I Right-click Argon Ion Number Density on Axis and choose Line Graph.
- 2 In the Settings window for Line Graph, locate the y-Axis Data section.
- 3 In the **Expression** text field, type plas.n_wAr_1p.
- 4 In the Argon Ion Number Density on Axis toolbar, click 💽 Plot.
- **5** Click the **Comextents** button in the **Graphics** toolbar.