



Terzaghi Compaction

Introduction

Fluids that move through pore spaces in an aquifer or reservoir can shield the porous medium from stress because they bear part of the load from, for instance, overlying rocks, sediments, fluids, and buildings. Withdrawing fluids from the pore space increases the stress the solids bear, sometimes to the degree that the reservoir measurably compacts. The reduction in the pore space loops back and alters the fluid pressures. The feedback brings about more fluid movement, and the cycle continues. Terzaghi Compaction describes a conventional flow model and uses the results in postprocessing to calculate vertical compaction following Terzaghi theory (Ref. 2).

Model Definition

This example analyzes fluid and solid behavior within three sedimentary layers overlying impermeable bedrock in a basin. The bedrock is faulted, which creates a step near a mountain front. The sediment stack totals 420 m at the centerline of the basin ($x = 0$ m) and thins to 120 m above the step ($x > 4000$ m). The top two layers are each 20 m thick.

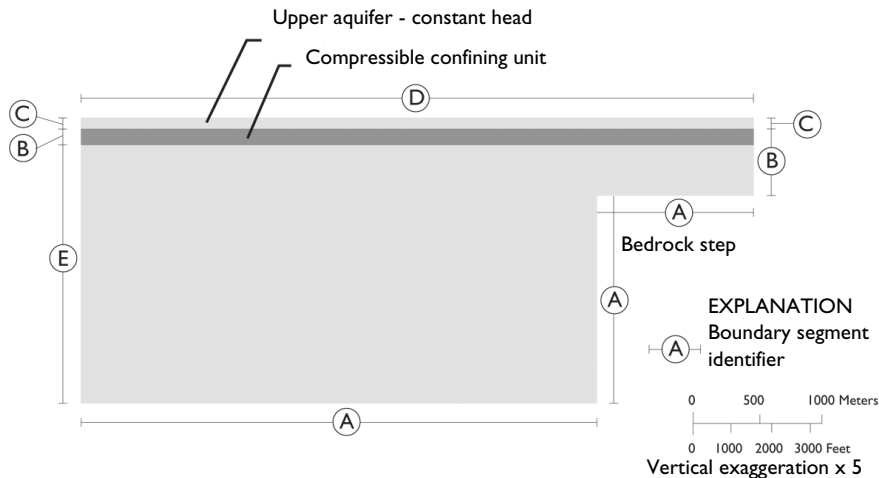


Figure 1: Model geometry showing boundary segments (from Leake and Hsieh, Ref. 1).

Pumping from the lower aquifer reduces hydraulic head down the centerline of the basin by 6 m per year. The head drop moves fluid away from the step. The middle layer is relatively impermeable. The pumping does not diminish the supply of fluids in the un pumped reservoir above it. The flow field is initially at steady state. The period of interest is 10 years.

This example sets up a traditional flow model and analyzes the vertical displacement during postprocessing. The flow field is fully described using the Darcy velocity in an equation of continuity

$$S_h \frac{\partial H}{\partial t} + \nabla \cdot (-K \nabla H) = 0 \quad (1)$$

where S_h is the storage coefficient (m^{-1}), K equals hydraulic conductivity (m/s), and H represents hydraulic head (m). In most conventional flow models, S_h represents small changes in fluid volume and pore space. It combines terms describing the fluid's compressibility, the solids' compressibility, and the reservoir's porosity. In the original research (Ref. 1) and in this model, S_h is the specific storage of the solid skeleton, S_{sk} .

Instead of solving Darcy's law in the hydraulic head formulation, we solve Equation 1 in the pressure formulation

$$\rho S \frac{\partial p}{\partial t} + \nabla \cdot \rho \left[-\frac{\kappa}{\mu} (\nabla p + \rho g \nabla D) \right] = 0$$

here, the storage coefficient S (1/Pa) is related to the fluid density, acceleration of gravity and the storage coefficient given in Equation 1 by the relation $S = S_h / \rho g$. Also, the hydraulic head is related to the fluid pressure and elevation $H = p / \rho g + D$, and the hydraulic conductivity is related to the permeability and dynamic viscosity of the fluid $K = \kappa \rho g / \mu$.

Because the aquifer is at equilibrium prior to pumping, you set up this model to predict the change in hydraulic head rather than the hydraulic head values themselves. The main advantage of this approach lies in establishing initial and boundary conditions. Here you specify that the hydraulic head along the centerline of the basin decreases linearly by 60 m over ten years, then simply state that the hydraulic head initially is zero and remains so where heads do not change in time.

The boundary and initial conditions are

$\mathbf{n} \cdot K \nabla H = 0$	$\partial\Omega$ base	A
$\mathbf{n} \cdot K \nabla H = 0$	$\partial\Omega$ other	B
$H = 0$	$\partial\Omega$ upper edge	C
$H = 0$	$\partial\Omega$ surface	D
$H = H_0(t)$	$\partial\Omega$ outlet	E
$H(0) = 0$	Ω	

where \mathbf{n} is the normal to the boundary. The letters A through E , taken from Leake and Hsieh (Ref. 1), denote the boundary (see Figure 1).

Terzaghi theory uses skeletal specific storage or aquifer compressibility to calculate the vertical compaction Δb (m) of the aquifer sediments in a given representative volume as

$$\Delta b = S_{\text{sk}} b(-H) \quad (2)$$

where b is standard notation for the vertical thickness of aquifer sediments (m).

Model Data

The following table gives the data for the Terzaghi compaction model:

TABLE 1: MODEL DATA.

VARIABLE	DESCRIPTION	VALUE
ρ_f	Fluid density	1000 kg/m ³
S_{sk}	Skeletal specific storage, aquifer layers	$1 \cdot 10^{-5} \text{ m}^{-1}$
	Skeletal specific storage, confining layer	$1 \cdot 10^{-4} \text{ m}^{-1}$
K_s	Hydraulic conductivity, aquifer layers	25 m/d
	Hydraulic conductivity, confining layer	0.01 m/d
$H(0)$	Initial hydraulic head	0 m
$H_0(t)$	Declining head boundary	(6 m/year)·t

Results and Discussion

Figure 2 shows a Year-10 snapshot from the COMSOL Multiphysics solution to the Terzaghi compaction example. The results describe conventional Darcy flow toward the centering of a basin, moving away from a bedrock step ($x > 4000$ m). The shading represents the change in hydraulic head brought on by pumping at $x = 0$ m. The streamlines and arrows denote the direction and magnitude of the fluid velocity. The flow goes from vertical near the surface to horizontal at the outlet. Where the sediments thicken at the edge of the step, the hydraulic gradient and the fluid velocities change abruptly.

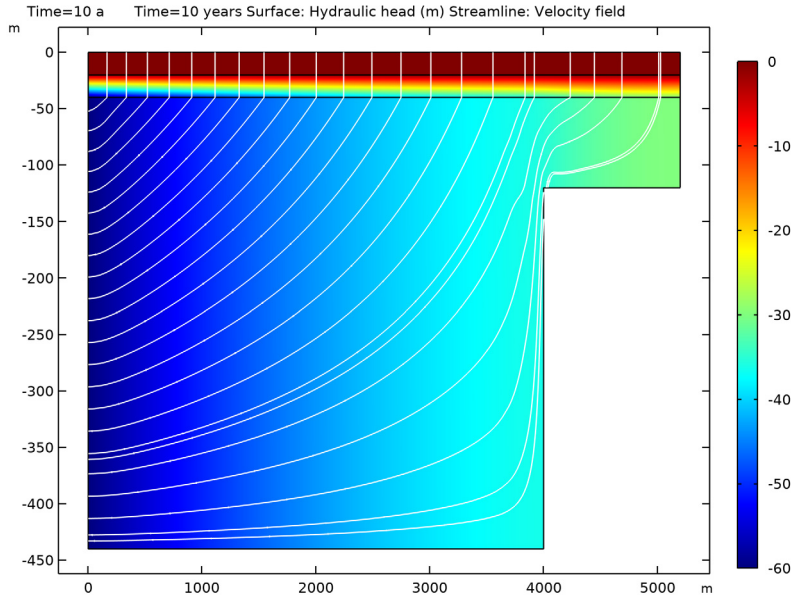


Figure 2: COMSOL Multiphysics solution to a Terzaghi flow problem. The figure shows change in hydraulic head (surface plot) and fluid velocity (streamlines).

The compaction calculated according to Equation 2 is shown as a contour plot in Figure 3.

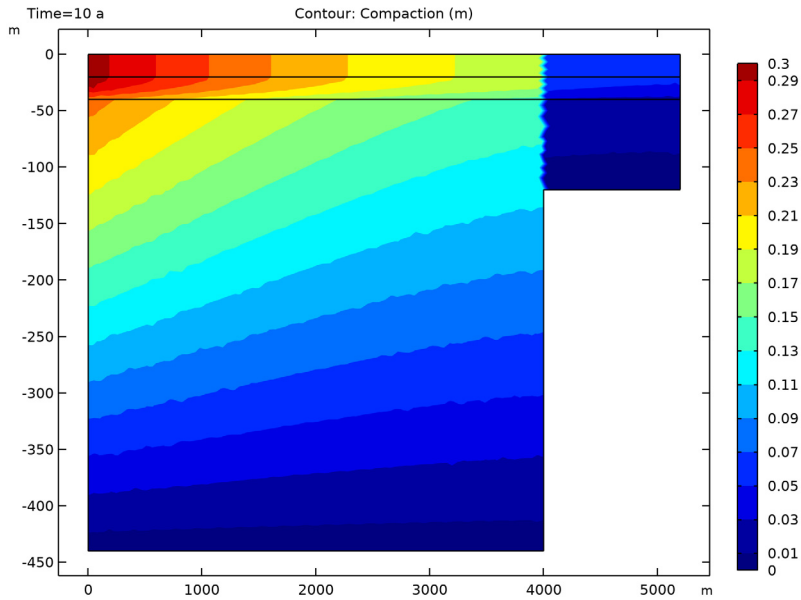


Figure 3: Contour plot of the compaction after 10 years.

References


1. S.A. Leake and P.A. Hsieh, *Simulation of Deformation of Sediments from Decline of Ground-Water Levels in an Aquifer Underlain by a Bedrock Step*, U.S. Geological Survey Open File Report, 97-47, 1997.
2. K. Terzaghi, *Theoretical Soil Mechanics*, John Wiley & Sons, p. 510, 1943.

Application Library path: Subsurface_Flow_Module/
Flow_and_Solid_Deformation/terzaghi_compaction




Modeling Instructions

From the **File** menu, choose **New**.

NEW


In the **New** window, click  **Model Wizard**.

MODEL WIZARD

- 1 In the **Model Wizard** window, click  **2D**.
- 2 In the **Select Physics** tree, select **Fluid Flow>Porous Media and Subsurface Flow>Darcy's Law (dl)**.
- 3 Click **Add**.
- 4 Click  **Study**.
- 5 In the **Select Study** tree, select **General Studies>Time Dependent**.
- 6 Click  **Done**.

GEOMETRY I


Rectangle 1 (r1)



- 1 In the **Geometry** toolbar, click  **Rectangle**.
- 2 In the **Settings** window for **Rectangle**, locate the **Size and Shape** section.
- 3 In the **Width** text field, type 5200.
- 4 In the **Height** text field, type 440.
- 5 Locate the **Position** section. In the **y** text field, type -440.
- 6 Click to expand the **Layers** section. Select the **Layers on top** check box.
- 7 Clear the **Layers on bottom** check box.
- 8 In the table, enter the following settings:

Layer name	Thickness (m)
Layer 1	20
Layer 2	20




- 9 Click  **Build Selected**.

Rectangle 2 (r2)

- 1 In the **Geometry** toolbar, click  **Rectangle**.
- 2 In the **Settings** window for **Rectangle**, locate the **Size and Shape** section.
- 3 In the **Width** text field, type 1200.
- 4 In the **Height** text field, type 320.
- 5 Locate the **Position** section. In the **x** text field, type 4000.

- 6 In the **y** text field, type -440.
- 7 Click  **Build Selected**.
- 8 Click the  **Zoom Extents** button in the **Graphics** toolbar.

Difference 1 (dif1)


- 1 In the **Geometry** toolbar, click  **Booleans and Partitions** and choose **Difference**.
- 2 Select the object **r1** only, to add it to the **Objects to add** list.
- 3 In the **Settings** window for **Difference**, locate the **Difference** section.
- 4 Find the **Objects to subtract** subsection. Select the  **Activate Selection** toggle button.
- 5 Select the object **r2** only.
- 6 In the **Geometry** toolbar, click  **Build All**.

DEFINITIONS

Because the model geometry is so elongated, you get a better view of it by turning off the default setting that preserves the aspect ratio.


In the **Model Builder** window, expand the **Component 1 (comp1)>Definitions** node.

Axis

- 1 In the **Model Builder** window, expand the **Component 1 (comp1)>Definitions>View 1** node, then click **Axis**.
- 2 In the **Settings** window for **Axis**, locate the **Axis** section.
- 3 From the **View scale** list, choose **Automatic**.
- 4 Click  **Update**.

Now, define variables for the skeletal specific storage and saturated hydraulic conductivity. Using local variables allows you to define variables on different domains with different expressions but identical names.


Variables 1

- 1 In the **Home** toolbar, click  **Variables** and choose **Local Variables**.
- 2 In the **Settings** window for **Variables**, locate the **Geometric Entity Selection** section.
- 3 From the **Geometric entity level** list, choose **Domain**.
- 4 Select Domains 1 and 3 only.

5 Locate the **Variables** section. In the table, enter the following settings:

Name	Expression	Unit	Description
S_sk	1e-5[m ⁻¹]	l/m	Skeletal specific storage
K_s	25[m/day]	m/s	Saturated hydraulic conductivity

Variables 2

- 1 In the **Home** toolbar, click  **Variables** and choose **Local Variables**.
- 2 In the **Settings** window for **Variables**, locate the **Geometric Entity Selection** section.
- 3 From the **Geometric entity level** list, choose **Domain**.
- 4 Select Domain 2 only.
- 5 Locate the **Variables** section. In the table, enter the following settings:

Name	Expression	Unit	Description
S_sk	1e-4[m ⁻¹]	l/m	Skeletal specific storage
K_s	0.01[m/day]	m/s	Saturated hydraulic conductivity

MATERIALS

Define blank materials and assign them to the domains. Later, after the physics is set up correctly, the materials indicate which material properties are required to solve the problem.

Fluid

- 1 In the **Model Builder** window, under **Component 1 (comp1)** right-click **Materials** and choose **Blank Material**.
- 2 In the **Settings** window for **Material**, type Fluid in the **Label** text field.

Porous 1

- 1 Right-click **Materials** and choose **Blank Material**.
- 2 In the **Settings** window for **Material**, type Porous 1 in the **Label** text field.
- 3 Locate the **Geometric Entity Selection** section. From the **Selection** list, choose **All domains**.

Porous 2

- 1 Right-click **Materials** and choose **Blank Material**.
- 2 In the **Settings** window for **Material**, type Porous 2 in the **Label** text field.
- 3 Select Domain 2 only.

DARCY'S LAW (DL)


Define all physical effects. After that, the material properties can be completed.

- 1 In the **Model Builder** window, under **Component 1 (comp1)** click **Darcy's Law (dl)**.
- 2 In the **Settings** window for **Darcy's Law**, locate the **Gravity Effects** section.
- 3 Select the **Include gravity** check box.

Gravity I

- 1 In the **Model Builder** window, under **Component 1 (comp1)>Darcy's Law (dl)** click **Gravity I**.
- 2 In the **Settings** window for **Gravity**, locate the **Gravity** section.
- 3 From the **Specify** list, choose **Elevation**.

Storage Model I

- 1 In the **Physics** toolbar, click  **Domains** and choose **Storage Model**.
- 2 In the **Settings** window for **Storage Model**, locate the **Domain Selection** section.
- 3 From the **Selection** list, choose **All domains**.
- 4 Locate the **Matrix Properties** section. From the **Permeability model** list, choose **Hydraulic conductivity**.
- 5 In the K text field, type K_s .
- 6 Locate the **Storage Model** section. From the **Storage** list, choose **User defined**. In the S text field, type $S_{sk}/d1.rho/g_const$.
- 7 Locate the **Fluid Properties** section. From the **Fluid material** list, choose **Fluid (mat1)**.
Fill in the missing material properties.

MATERIALS

Fluid (mat1)

- 1 In the **Model Builder** window, under **Component 1 (comp1)>Materials** click **Fluid (mat1)**.
- 2 In the **Settings** window for **Material**, locate the **Material Contents** section.
- 3 In the table, enter the following settings:

Property	Variable	Value	Unit	Property group
Density	rho	1000	kg/m ³	Basic

Porous I (mat2)

- 1 In the **Model Builder** window, click **Porous I (mat2)**.
- 2 In the **Settings** window for **Material**, locate the **Material Contents** section.

3 In the table, enter the following settings:

Property	Variable	Value	Unit	Property group
Porosity	epsilon	0.25	l	Basic

Porous 2 (mat3)


- 1 In the **Model Builder** window, click **Porous 2 (mat3)**.
- 2 In the **Settings** window for **Material**, locate the **Material Contents** section.
- 3 In the table, enter the following settings:

Property	Variable	Value	Unit	Property group
Porosity	epsilon	0.025	l	Basic


Now, set up the boundary conditions.

DARCY'S LAW (DL)

Hydraulic Head 1

- 1 In the **Physics** toolbar, click  **Boundaries** and choose **Hydraulic Head**.
- 2 Select Boundary 1 only.
- 3 In the **Settings** window for **Hydraulic Head**, locate the **Hydraulic Head** section.
- 4 In the H_0 text field, type $-6[\text{m/year}] * t$.


Hydraulic Head 2

- 1 In the **Physics** toolbar, click  **Boundaries** and choose **Hydraulic Head**.
- 2 Select Boundaries 5, 7, and 12 only.

To calculate the compaction according to [Equation 2](#) first, define a projection operator to integrate along the y -axis. Add a new variable which uses the projection operator to perform a convolution integral using the `dest` operator.

DEFINITIONS

General Projection 1 (genproj1)

- 1 In the **Definitions** toolbar, click  **Nonlocal Couplings** and choose **General Projection**.
- 2 In the **Settings** window for **General Projection**, locate the **Source Selection** section.
- 3 From the **Selection** list, choose **All domains**.

Variables 3

- 1 In the **Model Builder** window, right-click **Definitions** and choose **Variables**.


- 2 In the **Settings** window for **Variables**, locate the **Variables** section.
- 3 In the table, enter the following settings:

Name	Expression	Unit	Description
b	$\text{genproj1}(-d1.H*(y \leq \text{dest}(y))*S_sk)$	m	Compaction


To get a good resolution for the compaction in the y direction, use a finer mesh size and scale the geometry for the mesh algorithm.

MESH I

Free Triangular I


- 1 In the **Mesh** toolbar, click  **Free Triangular**.
- 2 In the **Settings** window for **Free Triangular**, click to expand the **Scale Geometry** section.
- 3 In the **y-direction scale** text field, type 10.

Size

- 1 In the **Model Builder** window, click **Size**.
- 2 In the **Settings** window for **Size**, locate the **Element Size** section.
- 3 From the **Predefined** list, choose **Finer**.
- 4 Click  **Build All**.

STUDY I

Step 1: Time Dependent

- 1 In the **Model Builder** window, under **Study I** click **Step 1: Time Dependent**.
- 2 In the **Settings** window for **Time Dependent**, locate the **Study Settings** section.
- 3 From the **Time unit** list, choose **a**.
- 4 In the **Output times** text field, type range(0, 1, 10).
- 5 In the **Home** toolbar, click  **Compute**.

RESULTS

Hydraulic Head

Follow these steps to reproduce the plot shown in [Figure 2](#):


- 1 In the **Settings** window for **2D Plot Group**, type Hydraulic Head in the **Label** text field.
- 2 Click to expand the **Title** section. From the **Title type** list, choose **Manual**.

- 3 In the **Title** text area, type Time=10 years Surface: Hydraulic head (m)
Streamline: Velocity field .

Surface


- 1 In the **Model Builder** window, expand the **Hydraulic Head** node, then click **Surface**.
- 2 In the **Settings** window for **Surface**, click **Replace Expression** in the upper-right corner of the **Expression** section. From the menu, choose **Component 1 (comp1)>Darcy's Law>dl.H - Hydraulic head - m**.

Streamline 1


- 1 In the **Model Builder** window, click **Streamline 1**.
- 2 In the **Settings** window for **Streamline**, locate the **Streamline Positioning** section.
- 3 From the **Positioning** list, choose **Magnitude controlled**.
- 4 Locate the **Coloring and Style** section. Find the **Point style** subsection. From the **Color** list, choose **White**.
- 5 In the **Hydraulic Head** toolbar, click  **Plot**.

Plot the compaction as shown in [Figure 3](#).

Compaction

- 1 In the **Home** toolbar, click  **Add Plot Group** and choose **2D Plot Group**.
- 2 In the **Settings** window for **2D Plot Group**, type **Compaction** in the **Label** text field.

Contour 1

- 1 Right-click **Compaction** and choose **Contour**.
- 2 In the **Settings** window for **Contour**, click **Replace Expression** in the upper-right corner of the **Expression** section. From the menu, choose **Component 1 (comp1)>Definitions>Variables>b - Compaction - m**.
- 3 Locate the **Levels** section. In the **Total levels** text field, type 15.
- 4 Locate the **Coloring and Style** section. From the **Contour type** list, choose **Filled**.
- 5 In the **Compaction** toolbar, click  **Plot**.

