



# Glazing Influence on Thermal Performances of a Window

## Introduction


---

During the design of a building, environmental issues have gained considerable influence in the entire project. One of the first concerns is to improve thermal performances. In this process, simulation softwares provide key tools for modeling thermal losses and performances in the building

The international standard ISO 10077-2:2012 ([Ref. 1](#)) deals with thermal performances of windows, doors, and shutters. It provides computed values of the thermal characteristics of frame profiles in order to validate a simulation software.

COMSOL Multiphysics successfully passes the entire benchmark. This document describes two test cases of ISO 10077-2:2012 related to the glazing influence on thermal performances of a window. Other test cases from this standard are available in the following applications:

- [Thermal Performances of Windows](#)
- [Thermal Performances of Roller Shutters](#)

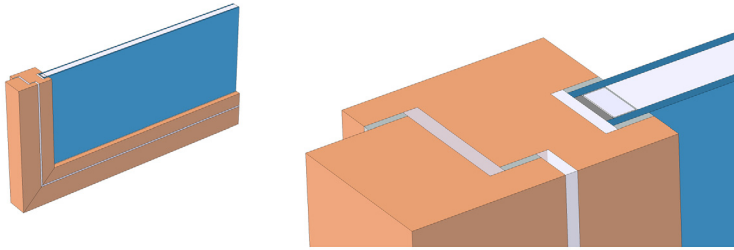

*Figure 1: Geometry of the window and cross-section view.*

## Model Definition

---

On each test case, a window section separates a hot internal side from a cold external side. The window frame is the same but in the first application, an insulation panel replaces the traditional glazing. This traditional glazing is tackled in the second application. After solving a model, two quantities are calculated and compared to the normative values:

- The thermal conductance between internal and external sides
- The thermal transmittance of the frame is calculated

## AIR CAVITIES

A window frame contains many cavities. The purpose is to ensure thermal insulation. According to the standard, cavities are modeled in different ways, depending on their shapes and on the width of the slit connecting them to the interior or exterior environment. Cavities are divided into three types:

- *unventilated cavities*, completely closed or connected either to the exterior or to the interior by a slit with a width not exceeding 2 mm
- *slightly ventilated cavities*, connected either to the exterior or to the interior by a slit greater than 2 mm but not exceeding 10 mm
- *well-ventilated cavities*, corresponding to a configuration not covered by one of the two preceding types

In unventilated and slightly ventilated cavities, the heat flow rate is represented by an equivalent thermal conductivity  $k_{eq}$ , which includes the heat flow by conduction, convection, and radiation, and depends on the geometry of the cavity and on the adjacent materials. See [Unventilated Rectangular Cavity](#) and [Slightly Ventilated Rectangular Cavities](#) for the definition of  $k_{eq}$ . These cavities are explicitly represented as domains in the geometry.

No well-ventilated cavity is present in the two applications presented below. See [Thermal Performances of Windows](#) for an example configuration with a well-ventilated cavity.

### *Unventilated Rectangular Cavity*

For an unventilated rectangular cavity, the equivalent thermal conductivity is defined by:

$$k_{eq} = \frac{d}{R}$$

where  $d$  is the cavity dimension in the heat flow rate direction, and  $R$  is the cavity thermal resistance given by:

$$R = \frac{1}{h_a + h_r}$$

Here,  $h_a$  is the convective heat transfer coefficient, and  $h_r$  is the radiative heat transfer coefficient. These coefficients are defined by:

$$h_a = \begin{cases} \frac{C_1}{d} & \text{if } b \leq 5 \text{ mm} \\ \max\left(\frac{C_1}{d}, C_2(\Delta T/(1\text{K}))^{1/3}\right) & \text{otherwise} \end{cases}$$

$$h_r = 4\sigma T_m^3 EF$$

where:

- $C_1 = 0.025 \text{ W}/(\text{m}\cdot\text{K})$
- $C_2 = 0.73 \text{ W}/(\text{m}^2\cdot\text{K})$
- $\Delta T$  is the maximum surface temperature difference in the cavity
- $\sigma = 5.67\cdot 10^{-8} \text{ W}/(\text{m}^2\cdot\text{K}^4)$  is the Stefan-Boltzmann constant
- $T_m$  is the average temperature on the boundaries of the cavity
- $E$  is the intersurface emittance, defined by:

$$E = \frac{1}{\frac{1}{\varepsilon_1} + \frac{1}{\varepsilon_2} - 1}$$

- $\varepsilon_1$  and  $\varepsilon_2$  are the surface emissivities (both are equal to 0.90 in this model)
- $F$  is the view factor of the rectangular section, defined by:

$$F = \frac{1}{2} \left( 1 - \frac{d}{b} + \sqrt{1 + \left( \frac{d}{b} \right)^2} \right)$$

- $d$  is the cavity dimension in the heat flow rate direction
- $b$  is the cavity dimension perpendicular to the heat flow rate direction

#### *Slightly Ventilated Rectangular Cavities*

For a slightly ventilated cavity, the equivalent thermal conductivity is twice that of an unventilated cavity of the same size.

#### **BOUNDARY CONDITIONS**

The heat flux conditions for internal and external sides are given by the Newton's law of cooling:

$$-\mathbf{n} \cdot (-k \nabla T) = h(T_{\text{ext}} - T)$$

where  $T_{\text{ext}}$  is the exterior temperature ( $T_{\text{ext}} = T_i = 20^\circ\text{C}$  for the internal side and  $T_{\text{ext}} = T_e = 0^\circ\text{C}$  for the external side). The standard defines thermal surface resistance,  $R_s$ , which is related to the heat transfer coefficient,  $h$ , by:

$$h = \frac{1}{R_s}$$

Internal and external thermal surface resistances are not equal. Moreover, on boundaries linked to the internal side, an increased thermal resistance is used for the edges. Figure 2 explains how to determine boundaries where it should be applied.

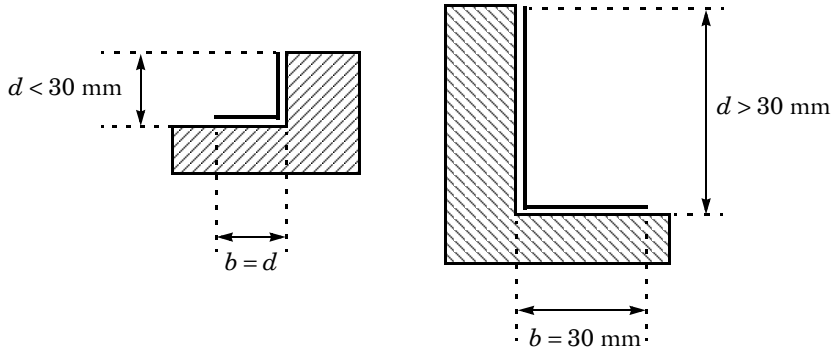


Figure 2: Protected boundaries.

If  $d$  is greater than 30 mm,  $b$  is set to 30 mm. Otherwise,  $b = d$  is chosen. Furthermore, two boundaries are considered as adiabatic: the boundary in contact with the wall and the end of the insulation panel or glazing.

## DESCRIPTION OF THE TWO APPLICATIONS


Figure 3 and Figure 4 depict the geometry of each application but only a part of the insulation panel or glazing is represented. Unventilated cavities are red-numbered while slightly ventilated cavities are green-numbered. Boundaries with an increased thermal resistance are represented with bold black lines. Adiabatic boundaries in contact with the wall are represented with a striped rectangle.

### Application 1: Wood Frame with an Insulation Panel

The first application studies the heat conduction in the wood frame section with an insulation panel. The frame section is made of two wood blocks with a low thermal conductivity of  $0.13 \text{ W}/(\text{m}\cdot\text{K})$ . In order to make the contact between these two blocks and to waterproof the window, two ethylene propylene diene monomer (EPDM) gaskets

are used. Two other EPDM blocks are arranged on both sides of the insulation panel. The insulation panel has a very low thermal conductivity of  $0.035 \text{ W}/(\text{m}\cdot\text{K})$ .


Two cavities are completely closed and are considered as *unventilated*. The third one is considered as *slightly ventilated*.

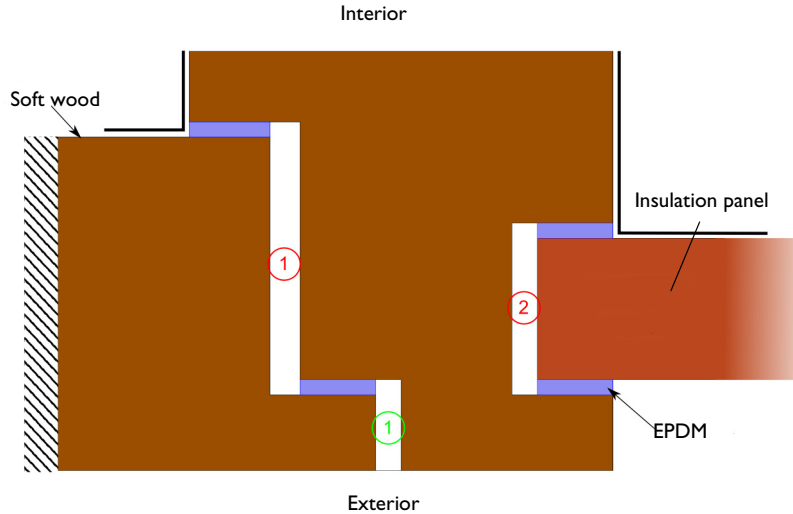

*Figure 3: Geometry of the wood frame with an insulation panel.*

#### *Application 2: Wood Frame with a Traditional Glazing*

The glazing is made of two glass panels with a thermal conductivity of  $1.00 \text{ W}/(\text{m}\cdot\text{K})$ . On the frame side of the glazing, a structure made of aluminum, polysulfide, and silica gel is used to block the glass blocks. Their thermal conductivities are  $160 \text{ W}/(\text{m}\cdot\text{K})$ ,  $0.40 \text{ W}/(\text{m}\cdot\text{K})$ , and  $0.13 \text{ W}/(\text{m}\cdot\text{K})$ , respectively. The space between the glass panels is filled with a gas whose thermal conductivity is  $0.034 \text{ W}/(\text{m}\cdot\text{K})$  (so this space is not considered as a traditional air cavity).

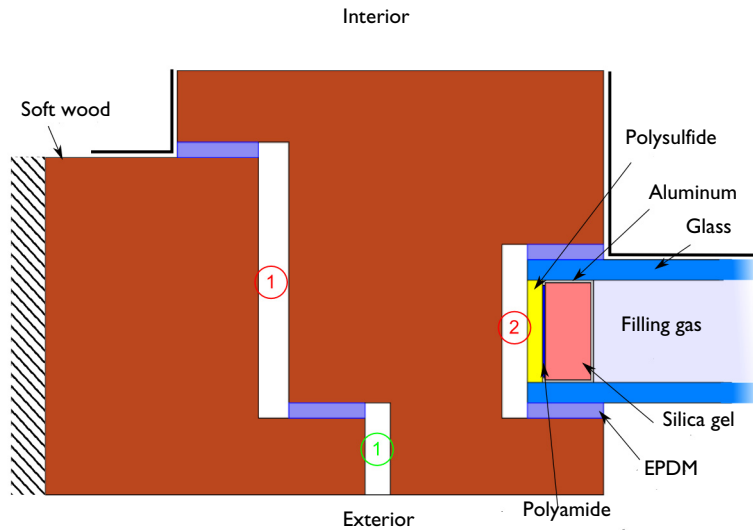


*Figure 4: Geometry of the wood frame with a glazing.*

## *Results and Discussion*


---

### **TEMPERATURE PROFILES**

Figure 5 and Figure 6 show the temperature profiles for each application.

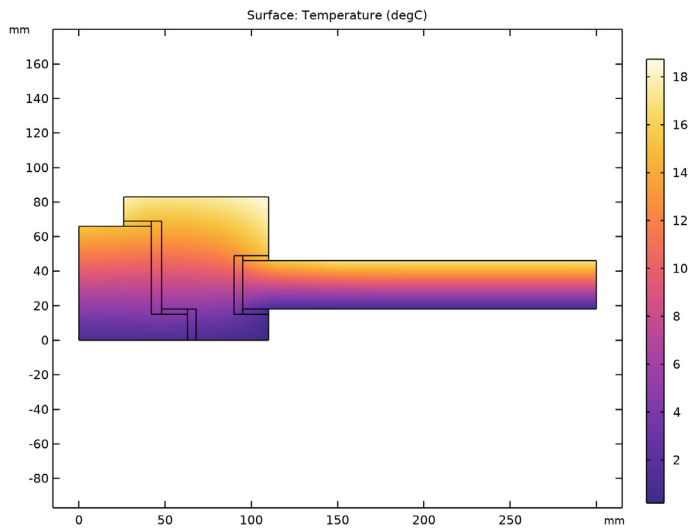

*Figure 5: Temperature profile with the insulation panel.*

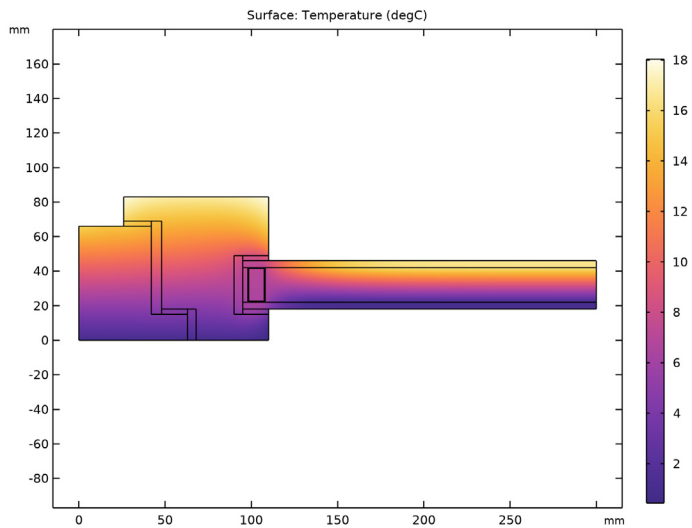

*Figure 6: Temperature distribution with glazing.*



## QUANTITIES OF INTEREST

The quantities of interest are the following:

- The thermal conductance of the entire section  $L^{2D}$  given by:

$$L^{2D} = \frac{\phi}{T_e - T_i}$$

where  $\phi$  is the heat flow rate through the window (in W/m),  $T_e = 0^\circ\text{C}$  is the external temperature and  $T_i = 20^\circ\text{C}$  is the internal temperature.

- The thermal transmittance of the frame  $U_f$  defined by:

$$U_f = \frac{L^{2D} - U_p b_p}{b_f}$$

where  $b_p$  is the visible width of the panel expressed in meters,  $b_f$  is the projected width of the frame section expressed in meters and  $U_p$  is the thermal transmittance of the central area of the panel expressed in  $\text{W}/(\text{m}^2 \cdot \text{K})$ .

- The linear thermal transmittance of the frame  $\Psi$  defined by:

$$\Psi = L^{2D} - U_f b_f - U_g b_g$$

where  $b_g$  is the visible width of the glazing expressed in meters,  $U_g$  is the thermal transmittance of the central area of the glazing expressed in  $\text{W}/(\text{m}^2 \cdot \text{K})$ .

Here,  $\Psi$  describes the additional heat flow caused by the interaction of the frame and the glass edge, including the effect of the spacer. The thermal transmittance  $U_g$  is provided, equal to  $1.3 \text{ W}/(\text{m}^2 \cdot \text{K})$ .

Table 1 and Table 2 compare the numerical results of COMSOL Multiphysics with the expected values provided by ISO 10077-2:2012.

TABLE 1: COMPARISON BETWEEN EXPECTED AND COMPUTED VALUES OF QUANTITIES IN APPLICATION 1.

QUANTITY	EXPECTED VALUE	COMPUTED VALUE	RELATIVE ERROR
$L^{2D} \text{ (W/(m} \cdot \text{K))}$	0.346	0.346	0.0%
$U_f \text{ (W/(m}^2 \cdot \text{K))}$	1.36	1.38	1.47%

TABLE 2: COMPARISON BETWEEN EXPECTED AND COMPUTED VALUES OF QUANTITIES IN APPLICATION 2.

QUANTITY	EXPECTED VALUE	COMPUTED VALUE	RELATIVE ERROR
$L^{2D} \text{ (W/(m} \cdot \text{K))}$	0.481	0.484	0.62%
$\Psi \text{ (W/(m}^2 \cdot \text{K))}$	0.084	0.085	1.19%

The maximum permissible differences to pass this test case are 3% for the thermal conductance and 5% for the (linear) thermal transmittance. The measured values are completely coherent and meet the validation criteria.

## *Reference*

---

1. European Committee for Standardization, *ISO 10077-2:2012, Thermal performance of windows, doors and shutters – Calculation of thermal transmittance – Part 2: Numerical method for frames*, 2012.

---

**Application Library path:** Heat\_Transfer\_Module/  
Buildings\_and\_Constructions/window\_and\_glazing\_thermal\_performances

---


## *Modeling Instructions*

---

### **ROOT**

Start by opening the following prepared file. It already contains global definitions, geometries, local variables, selections, operators and material properties.

### **APPLICATION LIBRARIES**

- 1 From the **File** menu, choose **Application Libraries**.
- 2 In the **Application Libraries** window, select **Heat Transfer Module> Buildings and Constructions>window\_and\_glazing\_thermal\_performances\_preset** in the tree.
- 3 Click  **Open**.

## *Window with Insulation Panel*

---

### **WINDOW WITH INSULATION PANEL (COMPI)**

In the **Model Builder** window, expand the **Window with Insulation Panel (comp1)** node.

### **DEFINITIONS (COMPI)**

#### *Variables 1*

Define the thermal conductance of the section for the postprocessing part as follows.

- 1 In the **Model Builder** window, expand the **Window with Insulation Panel (comp1)>Definitions** node, then click **Variables 1**.
- 2 In the **Settings** window for **Variables**, locate the **Variables** section.
- 3 In the table, enter the following settings:

Name	Expression	Unit	Description
L2D	$\text{int\_internal(ht.ntflux / (T_e - T_i))}$	W/(m·K)	Thermal conductance of the frame

Note that the heat flow rates through the internal and external boundaries are equal (in absolute value) because other boundaries are considered adiabatic.


- 4 In the **Model Builder** window, collapse the **Window with Insulation Panel (comp1)>Definitions** node.

## HEAT TRANSFER IN SOLIDS AND FLUIDS (HT)

### Fluid 1

- 1 In the **Model Builder** window, expand the **Heat Transfer in Solids and Fluids (ht)** node, then click **Fluid 1**.
- 2 Select Domains 4, 6, and 7 only.  
As there is no convection, a second order discretization of the temperature is set for better accuracy.
- 3 In the **Model Builder** window, click **Heat Transfer in Solids and Fluids (ht)**.
- 4 In the **Settings** window for **Heat Transfer in Solids and Fluids**, click to expand the **Discretization** section.
- 5 From the **Temperature** list, choose **Quadratic Lagrange**.

### Heat Flux 1


- 1 In the **Physics** toolbar, click  **Boundaries** and choose **Heat Flux**.
- 2 In the **Settings** window for **Heat Flux**, locate the **Boundary Selection** section.
- 3 From the **Selection** list, choose **Exterior Side**.
- 4 Locate the **Heat Flux** section. From the **Flux type** list, choose **Convective heat flux**.
- 5 In the  $h$  text field, type  $1/R_{se}$ .
- 6 In the  $T_{ext}$  text field, type  $T_e$ .

### Heat Flux 2

- 1 In the **Physics** toolbar, click  **Boundaries** and choose **Heat Flux**.


- 2 In the **Settings** window for **Heat Flux**, locate the **Boundary Selection** section.
- 3 From the **Selection** list, choose **Interior Side (Flat Area)**.
- 4 Locate the **Heat Flux** section. From the **Flux type** list, choose **Convective heat flux**.
- 5 In the  $h$  text field, type  $1/R_{si\_n}$ .
- 6 In the  $T_{ext}$  text field, type  $T_i$ .

#### *Heat Flux 3*

- 1 In the **Physics** toolbar, click  **Boundaries** and choose **Heat Flux**.
- 2 In the **Settings** window for **Heat Flux**, locate the **Boundary Selection** section.
- 3 From the **Selection** list, choose **Interior Side (Corner Area)**.
- 4 Locate the **Heat Flux** section. From the **Flux type** list, choose **Convective heat flux**.
- 5 In the  $h$  text field, type  $1/R_{si\_p}$ .
- 6 In the  $T_{ext}$  text field, type  $T_i$ .
- 7 In the **Model Builder** window, collapse the **Heat Transfer in Solids and Fluids (ht)** node.

### **STUDY 1**

The heat flow rate through the interior (or exterior) side of the section needs to be determined to calculate the thermal conductance of the section. In order to have a sufficient precision on this value, the default relative tolerance of the solver has already been modified to  $10^{-6}$ . To access to this value, expand the **Solver 1** node and click on the **Stationary Solver 1** node. In the **Stationary Solver** settings window, locate the **General** section.

- 1 In the **Home** toolbar, click  **Compute**.

### **RESULTS**

#### *Temperature (ht)*

A **Global Evaluation** node is added in order to calculate the thermal conductance of the section and the thermal transmittance of the frame.

#### *Thermal Properties, Window with Insulation Panel*

- 1 In the **Model Builder** window, expand the **Results>Derived Values** node.
- 2 Right-click **Results>Derived Values** and choose **Global Evaluation**.
- 3 In the **Settings** window for **Global Evaluation**, type Thermal Properties, Window with Insulation Panel in the **Label** text field.

4 Locate the **Expressions** section. In the table, enter the following settings:

Expression	Unit	Description
L2D	W/(m*K)	Thermal Conductance of the Section (L2D)
(L2D-Up*bp)/bf	W/(m^2*K)	Thermal Transmittance of the Frame (Uf)

5 Click  **Evaluate**.

**TABLE**

1 Go to the **Table** window.

The results should be close to the expected values in [Table 1](#).


**RESULTS**

*Surface*

1 In the **Model Builder** window, expand the **Results>Temperature (ht)** node, then click **Surface**.

2 In the **Settings** window for **Surface**, locate the **Expression** section.

3 From the **Unit** list, choose **degC**.

4 In the **Temperature (ht)** toolbar, click  **Plot**.

The current plot group shows the temperature distribution; compare with [Figure 5](#).

The same simulation method is applied to the other benchmark. The instructions below describe the steps to achieve the calculations.

**WINDOW WITH INSULATION PANEL (COMP1)**

In the **Model Builder** window, collapse the **Window with Insulation Panel (comp1)** node.

*Window with Glazing*

---

**WINDOW WITH GLAZING (COMP2)**

In the **Model Builder** window, expand the **Window with Glazing (comp2)** node.

**DEFINITIONS (COMP2)**

*Variables 2*

1 In the **Model Builder** window, expand the **Window with Glazing (comp2)>Definitions** node, then click **Variables 2**.

- 2 In the **Settings** window for **Variables**, locate the **Variables** section.
- 3 In the table, enter the following settings:

Name	Expression	Unit	Description
L2D	$\text{int\_internal(ht2.ntflux / (Te-Ti))}$	W/(m·K)	Thermal conductance of the frame


- 4 In the **Model Builder** window, collapse the **Window with Glazing (comp2)>Definitions** node.

## HEAT TRANSFER IN SOLIDS AND FLUIDS 2 (HT2)


### Fluid 1

- 1 In the **Model Builder** window, expand the **Heat Transfer in Solids and Fluids 2 (ht2)** node, then click **Fluid 1**.
- 2 Select Domains 4, 6, 7, and 16 only.  
As there is no convection, a second order discretization of the temperature is set for better accuracy.
- 3 In the **Model Builder** window, click **Heat Transfer in Solids and Fluids 2 (ht2)**.
- 4 In the **Settings** window for **Heat Transfer in Solids and Fluids**, click to expand the **Discretization** section.
- 5 From the **Temperature** list, choose **Quadratic Lagrange**.

### Heat Flux 1


- 1 In the **Physics** toolbar, click  **Boundaries** and choose **Heat Flux**.
- 2 In the **Settings** window for **Heat Flux**, locate the **Boundary Selection** section.
- 3 From the **Selection** list, choose **Exterior Side**.
- 4 Locate the **Heat Flux** section. From the **Flux type** list, choose **Convective heat flux**.
- 5 In the  $h$  text field, type  $1/R_{se}$ .
- 6 In the  $T_{ext}$  text field, type  $T_e$ .

### Heat Flux 2


- 1 In the **Physics** toolbar, click  **Boundaries** and choose **Heat Flux**.
- 2 In the **Settings** window for **Heat Flux**, locate the **Boundary Selection** section.
- 3 From the **Selection** list, choose **Interior Side (Flat Area)**.
- 4 Locate the **Heat Flux** section. From the **Flux type** list, choose **Convective heat flux**.
- 5 In the  $h$  text field, type  $1/R_{si\_n}$ .

6 In the  $T_{\text{ext}}$  text field, type  $T_i$ .

#### Heat Flux 3

- 1 In the **Physics** toolbar, click  **Boundaries** and choose **Heat Flux**.
- 2 In the **Settings** window for **Heat Flux**, locate the **Boundary Selection** section.
- 3 From the **Selection** list, choose **Interior Side (Corner Area)**.
- 4 Locate the **Heat Flux** section. From the **Flux type** list, choose **Convective heat flux**.
- 5 In the  $h$  text field, type  $1/R_{\text{si\_p}}$ .
- 6 In the  $T_{\text{ext}}$  text field, type  $T_i$ .
- 7 In the **Model Builder** window, collapse the **Heat Transfer in Solids and Fluids 2 (ht2)** node.


#### STUDY 2

In the **Home** toolbar, click  **Compute**.

#### RESULTS

A **Global Evaluation** node is added in order to calculate the thermal conductance of the section and the linear thermal transmittance of the frame.

#### Thermal Properties, Window with Glazing

- 1 In the **Results** toolbar, click  **Global Evaluation**.
- 2 In the **Settings** window for **Global Evaluation**, type Thermal Properties, Window with Glazing in the **Label** text field.
- 3 Locate the **Data** section. From the **Dataset** list, choose **Study 2/Solution 2 (4) (sol2)**.
- 4 Locate the **Expressions** section. In the table, enter the following settings:

Expression	Unit	Description
L2D	W/(m*K)	Thermal Conductance of the Section (L2D)
L2D-Uf*bf-Ug*bg	W/(m*K)	Linear Thermal Transmittance of the Frame (psi)

- 5 Click  **Evaluate**.


#### TABLE

- 1 Go to the **Table** window.

The results should be close to the expected values in [Table 2](#).

## RESULTS

### *Surface*

- 1** In the **Model Builder** window, expand the **Results>Temperature (ht2)** node, then click **Surface**.
- 2** In the **Settings** window for **Surface**, locate the **Expression** section.
- 3** From the **Unit** list, choose **degC**.
- 4** In the **Temperature (ht2)** toolbar, click  **Plot**.

The current plot group shows the temperature distribution; compare with [Figure 6](#).