



Fresnel Rhomb

Introduction

The uncoated Fresnel rhomb is one of the simplest devices for manipulating the polarization of light. In this example a Fresnel rhomb is constructed so that linearly polarized light at a specific angle of incidence becomes circularly polarized.

REFLECTION AND REFRACTION OF LIGHT AT MATERIAL DISCONTINUITIES

To quantify the phase delays introduced by total internal reflection within a glass prism, a preliminary understanding of the fundamentals of reflection and refraction of light is required. The following is explained in more detail in [Ref. 1](#) and in the *Ray Optics Module User's Guide*.

When a ray of light reaches the boundary between two dielectric media, a refracted ray is released in a direction determined by Snell's law,

$$n_1 \sin \theta_i = n_2 \sin \theta_t \quad (1)$$

where

- n_1 (dimensionless) is the refractive index of the medium containing the incident ray,
- n_2 (dimensionless) is the refractive index of the medium containing the refracted ray,
- θ_i (SI unit: rad) is the angle of incidence, and
- θ_t (SI unit: rad) is the angle of refraction.

Alternatively, Snell's law may be written as

$$\cos \theta_t = \sqrt{1 - \left(\frac{n_1}{n_2} \sin \theta_i\right)^2} \quad (2)$$

which shows that the direction cosine of the refracted ray is either a pure real number or a pure imaginary number when the refractive indices are real.

In addition to the refracted ray described above, a reflected ray is released with an angle of reflection equal to the angle of incidence. The incident ray, reflected ray, refracted ray, and surface normal all lie within the same plane, called the plane of incidence. These angles are illustrated below.

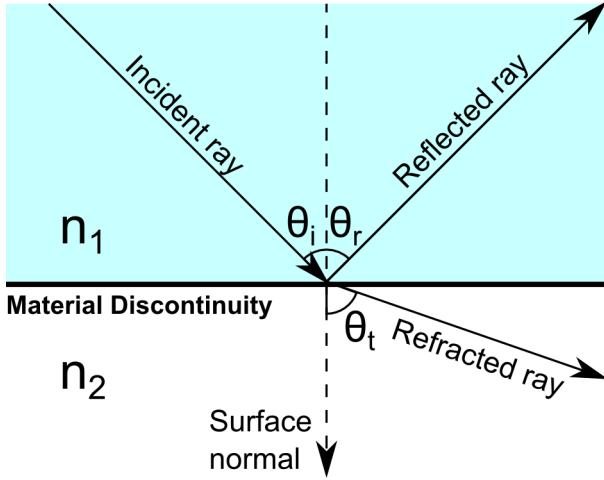


Figure 1: Incident, reflected, and refracted rays at an interface between two materials of different refractive indices.

The electric field amplitudes of the reflected and refracted rays are related to the amplitude of the incident ray by the Fresnel Equations:

$$t_p = \frac{E_p^{(t)}}{E_p^{(i)}} = \frac{2n_1 \cos \theta_i}{n_2 \cos \theta_i + n_1 \cos \theta_t} \quad t_s = \frac{E_s^{(t)}}{E_s^{(i)}} = \frac{2n_1 \cos \theta_i}{n_1 \cos \theta_i + n_2 \cos \theta_t} \quad (3)$$

$$r_p = \frac{E_p^{(r)}}{E_p^{(i)}} = \frac{n_2 \cos \theta_i - n_1 \cos \theta_t}{n_2 \cos \theta_i + n_1 \cos \theta_t} \quad r_s = \frac{E_s^{(r)}}{E_s^{(i)}} = \frac{n_1 \cos \theta_i - n_2 \cos \theta_t}{n_1 \cos \theta_i + n_2 \cos \theta_t} \quad (4)$$

where

- the subscript p (for “parallel”) represents the electric field component parallel to the plane of incidence,
- the subscript s (from the German “senkrecht”, or “perpendicular”) represents the electric field component perpendicular to the plane of incidence,
- the superscript (i) represents the incident ray,
- the superscript (r) represents the reflected ray, and
- the superscript (t) represents the refracted ray.

The variables r and t are called the reflection coefficient and transmission coefficient, respectively. For example, r_p is the reflection coefficient of p-polarized radiation, or radiation polarized so that the electric field vector lies in the plane of incidence.

The ratio of the intensities of the transmitted and reflected rays to the intensity of the incident ray are called the transmittance T and reflectance R , respectively, given by

$$R = |r|^2 \quad (5)$$

$$T = \frac{n_2 \cos \theta_t}{n_1 \cos \theta_i} |t|^2 \quad (6)$$

By substituting the definitions of the Fresnel coefficients for either s- or p-polarized radiation into [Equation 5](#) and [Equation 6](#), one obtains $R + T = 1$.

If the ray is propagating from a medium of higher refractive index to a medium of lower refractive index, that is, $n_2 < n_1$, then there exists a maximum value of the angle of incidence, beyond which no real value of the angle of refraction exists. This is the critical angle θ_c , given by

$$\theta_c = \text{asin} \frac{n_2}{n_1} \quad (7)$$

which is also the angle at which the radicand in [Equation 2](#) equals zero. When the angle of incidence is greater than the critical angle, that is, $\theta_i > \theta_c$, the ray is completely reflected and no refracted ray can propagate in the adjacent domain. This phenomenon is called total internal reflection. Because $\theta_i > \theta_c$, it follows from [Equation 2](#) that $\cos \theta_t$ has a value on the purely imaginary axis in the complex plane. The choice of whether to use the positive or negative imaginary value for $\cos \theta_t$ depends on the sign convention used to write the electromagnetic wave equation; the convention used in the COMSOL optics products would require $\cos \theta_t$ to be a negative imaginary number,

$$\cos \theta_t = -i \sqrt{\left(\frac{n_1}{n_2} \sin \theta_i\right)^2 - 1} \quad (8)$$

Substitution of [Equation 8](#) into [Equation 4](#) yields

$$r_p = \frac{n_2 \cos \theta_i + n_1 i \sqrt{\left(\frac{n_1}{n_2} \sin \theta_i\right)^2 - 1}}{n_2 \cos \theta_i - n_1 i \sqrt{\left(\frac{n_1}{n_2} \sin \theta_i\right)^2 - 1}} \quad r_s = \frac{n_1 \cos \theta_i + n_2 i \sqrt{\left(\frac{n_1}{n_2} \sin \theta_i\right)^2 - 1}}{n_1 \cos \theta_i - n_2 i \sqrt{\left(\frac{n_1}{n_2} \sin \theta_i\right)^2 - 1}}$$

Let $n = n_2 / n_1$; then further simplification yields

$$r_p = \frac{n^2 \cos \theta_i + i \sqrt{\sin^2 \theta_i - n^2}}{n^2 \cos \theta_i - i \sqrt{\sin^2 \theta_i - n^2}} \quad r_s = \frac{\cos \theta_i + i \sqrt{\sin^2 \theta_i - n^2}}{\cos \theta_i - i \sqrt{\sin^2 \theta_i - n^2}} \quad (9)$$

Both r_p and r_s are complex numbers of the form $A(A^*)^{-1}$, where A is the numerator. Each numerator can be expressed in terms of polar coordinates in the complex plane,

$$n^2 \cos \theta_i + i \sqrt{\sin^2 \theta_i - n^2} = a_p \exp(ib_p) \quad \cos \theta_i + i \sqrt{\sin^2 \theta_i - n^2} = a_s \exp(ib_s)$$

where the phases are

$$\tan b_p = \frac{\sqrt{\sin^2 \theta_i - n^2}}{n^2 \cos \theta_i} \quad \tan b_s = \frac{\sqrt{\sin^2 \theta_i - n^2}}{\cos \theta_i} \quad (10)$$

so that the reflection coefficients are of the form

$$r_p = \frac{a_p \exp(b_p i)}{a_p \exp(-b_p i)} = \exp(2ib_p) \quad r_s = \frac{a_s \exp(b_s i)}{a_s \exp(-b_s i)} = \exp(2ib_s) \quad (11)$$

which confirms that both reflection coefficients have unit magnitude during TIR.

Let δ_p and δ_s be the arguments of the complex-valued quantities r_p and r_s , respectively,

$$r_p = \exp(i\delta_p) \quad r_s = \exp(i\delta_s) \quad (12)$$

Comparing [Equation 11](#) with [Equation 12](#) and substituting the expressions in [Equation 10](#) then yields

$$\tan \frac{\delta_p}{2} = \frac{\sqrt{\sin^2 \theta_i - n^2}}{n^2 \cos \theta_i} \quad \tan \frac{\delta_s}{2} = \frac{\sqrt{\sin^2 \theta_i - n^2}}{\cos \theta_i} \quad (13)$$

The phase delay introduced by the total internal reflection is the difference between the two arguments,

$$\delta = \delta_p - \delta_s$$

Using the difference identity

$$\tan \frac{\delta}{2} = \frac{\tan \frac{\delta_p}{2} - \tan \frac{\delta_s}{2}}{1 - \tan \frac{\delta_p}{2} \tan \frac{\delta_s}{2}}$$

and substituting Equation 13 yields an expression for the phase delay,

$$\delta = 2 \operatorname{atan} \left(\frac{\cos \theta_i \sqrt{\sin^2 \theta_i - n^2}}{\sin^2 \theta_i} \right) \quad (14)$$

Equation 14 is an expression for the phase delay that does not depend on the vacuum wavelength, and therefore can be considered an achromatic phase shifter if the frequency dependence of the refractive index is neglected. However, most common optical materials do not have sufficiently large refractive indices to induce a 90° phase shift with a single reflection. For example, if the region surrounding the prism is an air or vacuum domain ($n_2 = 1$), then the smallest real value of the refractive index is approximately $n_1 = 2.414$ for an angle of incidence of about $\theta_i = 32.9^\circ$. If the angle of incidence is 45° or greater, then no real finite value of n_2 yields a 90° phase delay.

A workaround is to subject the light to multiple total internal reflections, each of which causes a smaller phase delay. In a Fresnel rhomb, light undergoes total internal reflection twice while passing through a glass prism. The Fresnel rhomb is designed and oriented so that each reflection causes a phase delay of 45° , so that the total phase delay for light passing through the prism is 90° .

Model Definition

The model geometry is an uncoated glass prism of refractive index $n_1 = 1.51$ surrounded by air ($n_2 = 1$). The model uses two physics interfaces and two studies.

The first physics interface is an instance of the Global ODEs and DAEs interface. This interface is used to solve Equation 14 for the angle of incidence that causes a phase retardation of $\delta = 45^\circ$ between the s- and p-polarized components during each total internal reflection for the refractive index ratio $n = 1/1.51$.

The second physics interface is an instance of the Geometrical Optics interface, which is used to trace the path of a light ray through the Fresnel rhomb. The light ray enters the prism so that it undergoes total internal reflection at the angle of incidence computed by the Global ODEs and DAEs interface. The released ray is linearly polarized with its direction of polarization at a 45° angle to the plane of incidence.

The Stokes parameters are computed along each ray trajectory. These Stokes parameters can be used to describe the degree to which a ray is linearly or circularly polarized. In addition, it is possible to draw polarization ellipses along a **Ray Trajectories** plot to indicate the polarization state at discrete optical path length intervals along the ray.

Results and Discussion

The Global ODEs and DAEs interface was used to solve [Equation 14](#) for the angle of incidence θ_i given the refractive index ratio $n = 1/1.51$ and the desired phase delay per reflection $\delta = 45^\circ$. The resulting value of θ_i is 0.84855 radians or about 48.618° .

The computed value of θ_i was then used in the geometry setup of the Fresnel rhomb, which is simply a parallelogram extruded into a 3D geometry.



The Stokes parameters are also computed along the ray paths in 2D geometries, so in principle the Fresnel rhomb could instead be modeled in 2D. However, in 3D it is easier to visualize the state of ray polarization because the 3D **Ray Trajectories** plot includes a built-in option to display polarization ellipses along the ray trajectories.

The default **Ray Trajectories** plot is shown in [Figure 2](#). The color expression shows the optical path length along the ray. The circles and ellipses along the ray path are polarization ellipses that indicate the state of polarization. The arrows on the perimeter of each circle or ellipse indicate the sense of rotation of the instantaneous electric field vector. The ray enters the prism from the left side of the image. After one total internal reflection the ray becomes elliptically polarized. After two total internal reflections the polarization ellipses appear circular.

The degree of circular polarization can be quantified by plotting the ratio of the fourth and first Stokes parameters. The first Stokes parameter is the ray intensity; the fourth Stokes parameter is the degree of circular polarization. A more detailed discussion of Stokes parameters and polarization is given in the *Ray Optics Module User's Guide*.

The ratio of the Stokes parameters is plotted in [Figure 3](#). Initially the ratio is zero, meaning that the incident ray is linearly polarized or unpolarized. After one total internal reflection the ratio is $1/\sqrt{2}$; values with magnitude between zero and one indicate varying degrees of elliptical polarization. After two reflections, the magnitude is approximately unity, corresponding to circular polarization.

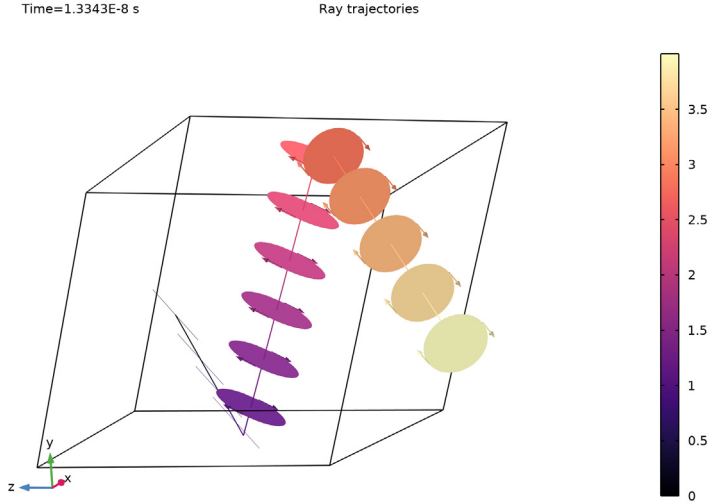


Figure 2: Ray propagation in a Fresnel rhomb. The color expression shows the optical path length. Polarization ellipses are shown along the ray path.

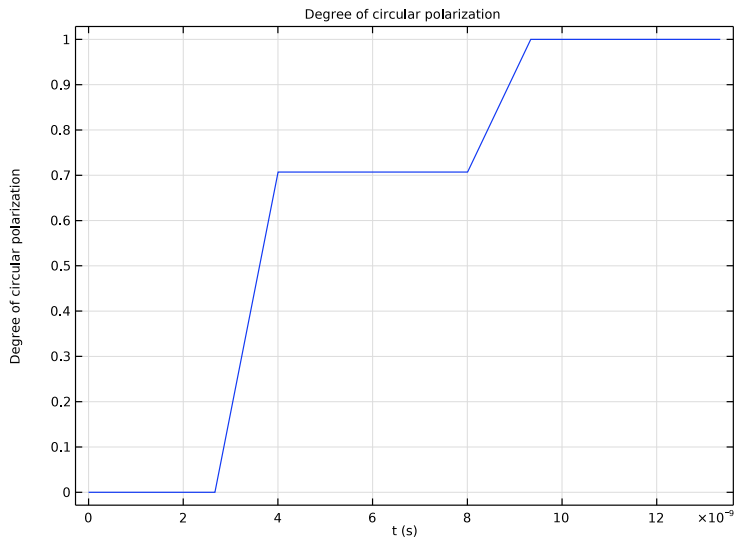


Figure 3: The ratio of the fourth and first Stokes parameters is plotted as a function of optical path length.

References


1. M. Born and E. Wolf, Principles of Optics, 7th ed., Cambridge, 1999.
 2. King, R. J. “Quarter-wave retardation systems based on the Fresnel rhomb principle.” Journal of Scientific Instruments 43, no. 9 (1966): 617.
-

Application Library path: Ray_Optics_Module/Prisms_and_Coatings/fresnel_rhomb


Modeling Instructions

From the **File** menu, choose **New**.

NEW

In the **New** window, click  **Model Wizard**.

MODEL WIZARD

1 In the **Model Wizard** window, click  **3D**.

The first part of the model involves solving for the correct angle of incidence such that the Fresnel rhomb induces a 90-degree phase delay between the s- and p-polarized components of the ray.

2 In the **Select Physics** tree, select **Mathematics>ODE and DAE Interfaces>Global ODEs and DAEs (ge)**.

3 Click **Add**.

4 Click  **Study**.

5 In the **Select Study** tree, select **General Studies>Stationary**.

6 Click  **Done**.

GLOBAL DEFINITIONS

Parameters 1

1 In the **Model Builder** window, under **Global Definitions** click **Parameters 1**.

2 In the **Settings** window for **Parameters**, locate the **Parameters** section.

3 In the table, enter the following settings:

Name	Expression	Value	Description
delta	45[deg]	0.7854 rad	Phase delay between s- and p-polarizations
n1	1	1	Refractive index, air
n2	1.51	1.51	Refractive index, glass
n12	n1/n2	0.66225	Refractive index ratio

The specified phase delay of 45 degrees, when applied at two surfaces, should convert linearly polarized light to circularly polarized light.

GLOBAL ODES AND DAES (GE)

Global Equations 1

Set up the **Global Equations** interface following [Equation 14](#).


1 In the **Model Builder** window, under **Component 1 (comp1)>Global ODEs and DAEs (ge)** click **Global Equations 1**.

2 In the **Settings** window for **Global Equations**, locate the **Global Equations** section.

3 In the table, enter the following settings:

Name	$f(u,ut,utt,t)$ (1)	Initial value (u_0) (1)
thetai	$\cos(\text{thetai}) \cdot \sqrt{\sin(\text{thetai})^2 - n12^2} / \sin(\text{thetai})^2 - \tan(\text{delta}/2)$	45[deg]

STUDY 1

In the **Home** toolbar, click  **Compute**.

RESULTS

Global Evaluation 1

In the **Settings** window for **Global Evaluation**, click  **Evaluate**.

TABLE

1 Go to the **Table** window.

The resulting value is the angle of incidence, in radians, that will induce a 45-degree phase delay between s- and p-polarized light during total internal reflection. It should be approximately 0.84855.

GLOBAL DEFINITIONS

Parameters 1


- 1 In the **Model Builder** window, expand the **Component 1 (comp1)>Geometry 1** node, then click **Global Definitions>Parameters 1**.
- 2 In the **Settings** window for **Parameters**, locate the **Parameters** section.
- 3 In the table, enter the following settings:

Name	Expression	Value	Description
theta	0.84855[rad]	0.84855 rad	Angle of incidence

Alternatively, copy the numeric value from Table 1 and paste it into the **Expression** column.

GEOMETRY 1


Work Plane 1 (wp1)

In the **Geometry** toolbar, click  **Work Plane**.

Work Plane 1 (wp1)>Plane Geometry

In the **Model Builder** window, click **Plane Geometry**.


Work Plane 1 (wp1)>Polygon 1 (pol1)

- 1 In the **Work Plane** toolbar, click  **Polygon**.
- 2 In the **Settings** window for **Polygon**, locate the **Coordinates** section.
- 3 In the table, enter the following settings:



xw (m)	yw (m)
0	0
1	0
$\cos(\text{theta})+1$	$\sin(\text{theta})$
$\cos(\text{theta})$	$\sin(\text{theta})$

- 4 Click  **Build Selected**.



Extrude 1 (ext1)

- 1 In the **Model Builder** window, under **Component 1 (comp1)>Geometry 1** right-click **Work Plane 1 (wp1)** and choose **Extrude**.
- 2 In the **Settings** window for **Extrude**, click  **Build All Objects**.

ADD PHYSICS


- 1 In the **Home** toolbar, click  **Add Physics** to open the **Add Physics** window.
- 2 Go to the **Add Physics** window.
- 3 In the tree, select **Optics>Ray Optics>Geometrical Optics (gop)**.
- 4 In the **Physics interfaces in study** section, clear the check box next to **Study I**, which is not compatible with the Geometrical Optics interface.
- 5 Click **Add to Component I** in the window toolbar.
- 6 In the **Home** toolbar, click  **Add Physics** to close the **Add Physics** window.

ADD STUDY

- 1 In the **Home** toolbar, click  **Add Study** to open the **Add Study** window.
- 2 Go to the **Add Study** window.
- 3 Find the **Studies** subsection. In the **Select Study** tree, select **Preset Studies for Selected Physics Interfaces>Geometrical Optics>Ray Tracing**.
- 4 In the **Physics interfaces in study** section, clear the check box next to **Global ODEs and DAEs (ge)**, which will not be solved for in the second study.
- 5 Click **Add Study** in the window toolbar.
- 6 In the **Home** toolbar, click  **Add Study** to close the **Add Study** window.

MATERIALS

Glass

- 1 In the **Materials** toolbar, click  **Blank Material**.
- 2 In the **Settings** window for **Material**, type Glass in the **Label** text field.
- 3 Locate the **Material Contents** section. In the table, enter the following settings:


Property	Variable	Value	Unit	Property group
Refractive index, real part	n_{iso} ; $n_{ij} = n_{\text{iso}}$, $n_{ij} = 0$	n_2	1	Refractive index

GEOMETRICAL OPTICS (GOP)

- 1 In the **Model Builder** window, under **Component I (comp1)** click **Geometrical Optics (gop)**.
- 2 In the **Settings** window for **Geometrical Optics**, locate the **Material Properties of Exterior and Unmeshed Domains** section.
- 3 In the n_{ext} text field, type n_1 .

- 4 Locate the **Ray Release and Propagation** section. In the **Maximum number of secondary rays** text field, type 0.
- 5 Locate the **Intensity Computation** section. From the **Intensity computation** list, choose **Compute intensity**.
- 6 Locate the **Additional Variables** section. Select the **Compute optical path length** check box.

Release from Grid 1


- 1 In the **Physics** toolbar, click  **Global** and choose **Release from Grid**.
- 2 In the **Settings** window for **Release from Grid**, locate the **Initial Coordinates** section.
- 3 In the $q_{y,0}$ text field, type 0.5.
- 4 In the $q_{z,0}$ text field, type 0.5.
- 5 Locate the **Ray Direction Vector** section. Specify the \mathbf{L}_0 vector as

$\sin(\theta)$	x
$-\cos(\theta)$	y
0	z

- 6 Locate the **Initial Polarization** section. From the **Initial polarization type** list, choose **Fully polarized**.
- 7 From the **Initial polarization** list, choose **User defined**.
- 8 In the $a_{2,0}$ text field, type 1.
The released ray will then be linearly polarized at a 45-degree angle to the plane of incidence.

Add an antireflective coating to the surfaces where the ray enters and leaves the glass.



Material Discontinuity 2

- 1 In the **Physics** toolbar, click  **Boundaries** and choose **Material Discontinuity**.
- 2 Select Boundaries 1 and 6 only.
- 3 In the **Settings** window for **Material Discontinuity**, locate the **Coatings** section.
- 4 From the **Thin dielectric films on boundary** list, choose **Anti-reflective coating**.

STUDY 2

Step 1: Ray Tracing

- 1 In the **Model Builder** window, under **Study 2** click **Step 1: Ray Tracing**.
- 2 In the **Settings** window for **Ray Tracing**, locate the **Study Settings** section.

- 3 From the **Time-step specification** list, choose **Specify maximum path length**.
- 4 Click  **Range**.
- 5 In the **Range** dialog box, type 0.4 in the **Step** text field.
- 6 In the **Stop** text field, type 4.
- 7 Click **Replace**.
- 8 In the **Home** toolbar, click  **Compute**.

RESULTS

Ray Trajectories (gop)

The default plot shows the path of the ray as it undergoes total internal reflection in the prism. The default color expression is the intensity, which is nearly constant because the incident ray is treated as a planar wavefront.


Ray Trajectories I


- 1 In the **Model Builder** window, expand the **Ray Trajectories (gop)** node, then click **Ray Trajectories I**.
- 2 In the **Settings** window for **Ray Trajectories**, locate the **Coloring and Style** section.
- 3 Find the **Point style** subsection. From the **Type** list, choose **Ellipse**.
- 4 In the **Maximum number of ellipses** text field, type 15.

The default expressions are the components of the semimajor and semiminor axes of the polarization ellipse. The ellipses show that the ray is initially linearly polarized at a 45-degree angle to the plane of incidence, then becomes elliptically polarized after one reflection and circularly polarized after two.

Color Expression I


The intensity is uniform along the ray path, so instead use the optical path length to color it.

- 1 In the **Model Builder** window, expand the **Ray Trajectories I** node, then click **Color Expression I**.
- 2 In the **Settings** window for **Color Expression**, click **Replace Expression** in the upper-right corner of the **Expression** section. From the menu, choose **Component I (comp1)> Geometrical Optics>Ray properties>gop.L - Optical path length - m**.
- 3 Locate the **Coloring and Style** section. Click  **Change Color Table**.
- 4 In the **Color Table** dialog box, select **Thermal>Magma** in the tree.
- 5 Click **OK**.

- 6 In the **Ray Trajectories (gop)** toolbar, click  **Plot**.
- 7 In the **Model Builder** window, click **Color Expression 1**.
- 8 Rotate the **Graphics** window so that the polarization ellipses of the ray can be clearly seen as it exits the prism. Click the **Show Grid** button to get a clearer view. Then compare the resulting plot to [Figure 2](#).



Now that the polarization ellipses have been visualized, use the Stokes parameters to confirm that the outgoing array is circularly polarized and not just elliptically polarized.

ID Plot Group 2

- 1 In the **Home** toolbar, click  **Add Plot Group** and choose **ID Plot Group**.
- 2 In the **Settings** window for **ID Plot Group**, locate the **Data** section.
- 3 From the **Dataset** list, choose **Ray 1**.
- 4 Click to expand the **Title** section. From the **Title type** list, choose **Manual**.
- 5 In the **Title** text area, type Degree of circular polarization.
- 6 Locate the **Plot Settings** section.
- 7 Select the **y-axis label** check box. In the associated text field, type Degree of circular polarization.

Use the **Ray** plot to show quantitatively how the ray becomes circularly polarized after it undergoes total internal reflection twice.

Ray 1

- 1 In the **ID Plot Group 2** toolbar, click  **More Plots** and choose **Ray**.
- 2 In the **Settings** window for **Ray**, locate the **y-Axis Data** section.
- 3 In the **Expression** text field, type `gop.s3/gop.s0`.
 In this expression, `gop.s3` is the Stokes parameter that indicates circular polarization, and `gop.s0` is the ray intensity. The ratio of these two Stokes parameters is 1 or -1 for circularly polarized light and 0 for unpolarized or linearly polarized light.
- 4 In the **ID Plot Group 2** toolbar, click  **Plot**. Compare the resulting plot to [Figure 3](#).

