



Model created in COMSOL Multiphysics 6.4

Viscous Heating in a Fluid Damper

Introduction

Fluid dampers are used in military devices for shock isolation and in civil structures for suppressing earthquake-induced shaking and wind-induced vibrations, among many other applications. Fluid dampers work by dissipating the mechanical energy into heat (Ref. 1). This example shows the phenomenon of viscous heating and consequent temperature increase in a fluid damper. Viscous heating is also important in microflow devices, where a small cross-sectional area and large length of the device can generate significant heating and affect the fluid flow consequently (Ref. 2).

Model Definition

The structural elements of a fluid damper are relatively few. Figure 1 depicts a schematic of the fluid damper modeled herein with its main components: damper cylinder housing, piston rod, piston head, and viscous fluid in the chamber. There is a small annular space between the piston head and the inside wall of the cylinder housing. This acts as an effective channel for the fluid. As the piston head moves back and forth inside the damper cylinder, fluid is forced to pass through the annular channel with large shear rate, which leads to significant heat generation. The heat is transferred in both the axial and radial directions. In the radial direction, the heat is conducted through the cylinder house wall and convected to the air outside the damper, which is modeled using the Newton's convective cooling law.

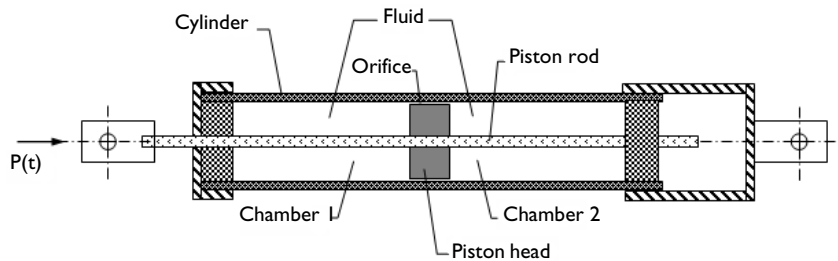


Figure 1: A sketch of a typical fluid damper with its major components.

You make use of the axially symmetric nature of the fluid damper and model it in a 2D-axisymmetric geometry as shown in Figure 2. The geometric dimensions and other parameters of the damper are taken according to Ref. 1 to represent the smaller, 15 kip damper experimentally studied therein. Thus, the piston head has a diameter of 8.37 cm, the piston rod diameter is 2.83 cm, and the gap thickness is about 1/100 of the piston

head diameter. The damper has the maximum stroke U_0 of 0.1524 m. The damper solid parts are made of steel, and the damping fluid is silicone oil.

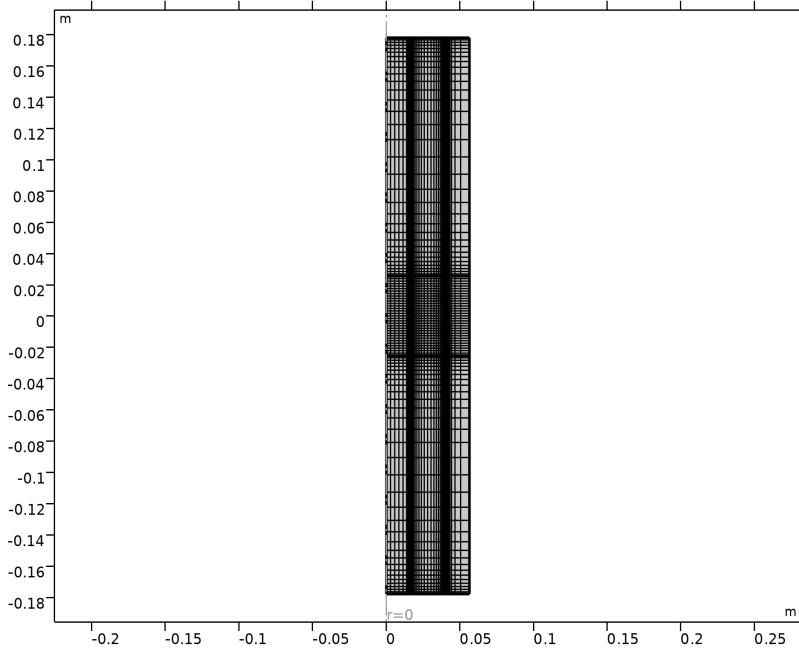


Figure 2: Geometry and mesh. The domains (from left to right) represent: piston rod, piston head and damping fluid space, and the damper outer wall.

FLUID FLOW

The fluid flow in the fluid damper is described by the incompressible Navier–Stokes equations, solving for the velocity field $\mathbf{u} = (u, w)$ and the pressure p :

$$\rho \frac{\partial \mathbf{u}}{\partial t} + \rho(\mathbf{u} \cdot \nabla) \mathbf{u} = \nabla \cdot [-p \mathbf{I} + \mu(\nabla \mathbf{u} + (\nabla \mathbf{u})^T)]$$

$$\rho \nabla \cdot \mathbf{u} = 0$$

The density is assumed independent of the temperature, while the temperature dependence of the fluid viscosity is taken into account as:

$$\mu = \mu_0 - \alpha(T - T_0) \quad (1)$$

The reference material properties of silicone oil are used.

No slip wall boundary conditions are applied for both ends of the damper cylinder and on the inner wall of the damper cylinder house. A Moving/sliding wall with the given velocity is applied on the boundaries of the piston head and on the piston rod.

CONJUGATE HEAT TRANSFER

The conjugate heat transfer is solved both in the fluid domain and the damper cylinder house wall: heat transfer by convection and conduction in the fluid domain, heat transfer by conduction only in the solid domain, and the temperature field is continuous between the fluid and solid domains. In the fluid domain, the viscous dissipation is activated:

$$\rho C_p \frac{\partial T}{\partial t} + \rho C_p \mathbf{u} \cdot \nabla T + \nabla \cdot \mathbf{q} = Q + \mu [\nabla \mathbf{u} + (\nabla \mathbf{u})^T] : \nabla \mathbf{u}$$

where the second term on the right-hand side represent the heat source from viscous dissipation. Hence, the problem is a fully coupled fluid-thermal interaction problem.

In the solid domain of the cylinder house wall, this equation reduces to conductive heat transfer equation without any heating source.

The heat flux boundary condition based on the Newton's cooling law is applied on the outside boundaries of the cylinder house wall. The temperature field is continuous between the fluid and solid domains. The ends of the damper connected to the structures outside are kept at constant temperature.

The piston head movement is provided as harmonic oscillations with given amplitude and frequency, $z = a_0 \sin(2\pi ft)$, the piston head starting the simulation in its middle position. The motion is modeled using the arbitrary Lagrangian–Eulerian (ALE) deformed mesh. The ALE method handles the dynamics of the deforming geometry and the moving boundaries with a moving grid. The Navier–Stokes equations for fluid flow and heat equations for temperature variation are formulated in these moving coordinates.

Results and Discussion

The modeled loading has the amplitude of 0.127 m, and the excitation frequency is 0.4 Hz. This represents the long-stroke loading experiment performed in [Ref. 1](#). The loading time period is 40 s.

Note that the simulation results for the temperature are presented in degrees Fahrenheit for the sake of easier comparison with the experimental measurements.

Figure 3 gives the temperature field in the damper at the end of the loading. It also shows a typical streamline configuration for the flow induced in the damping fluid.

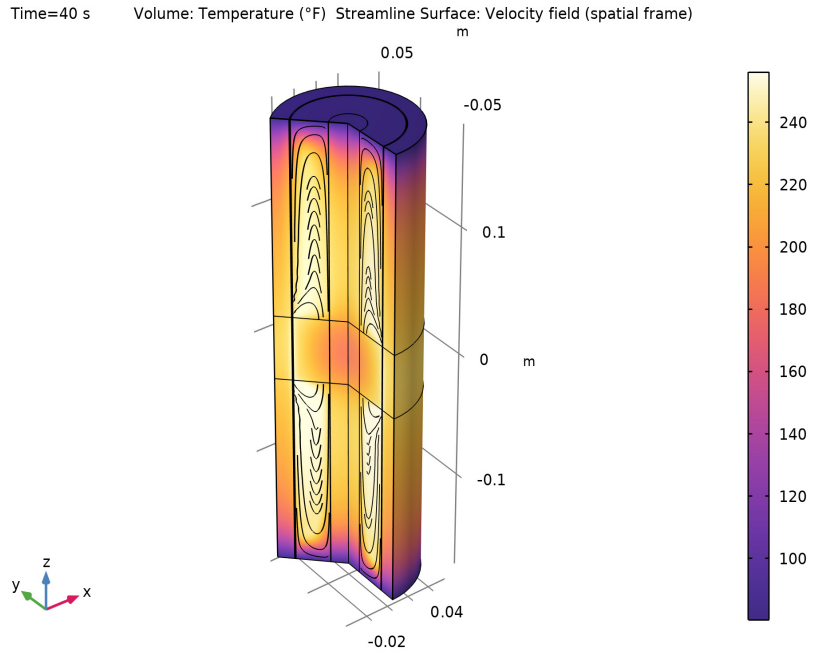


Figure 3: Temperature field in the damper at the end of simulation.

Figure 4 shows the temperature of the inner wall of the damper at the end-of-stroke position $z = U_0$. This corresponds to the internal probe position under experiments performed in Ref. 1. The simulation results show very good agreement with the experimental measurements (see Fig. 9 in Ref. 1).

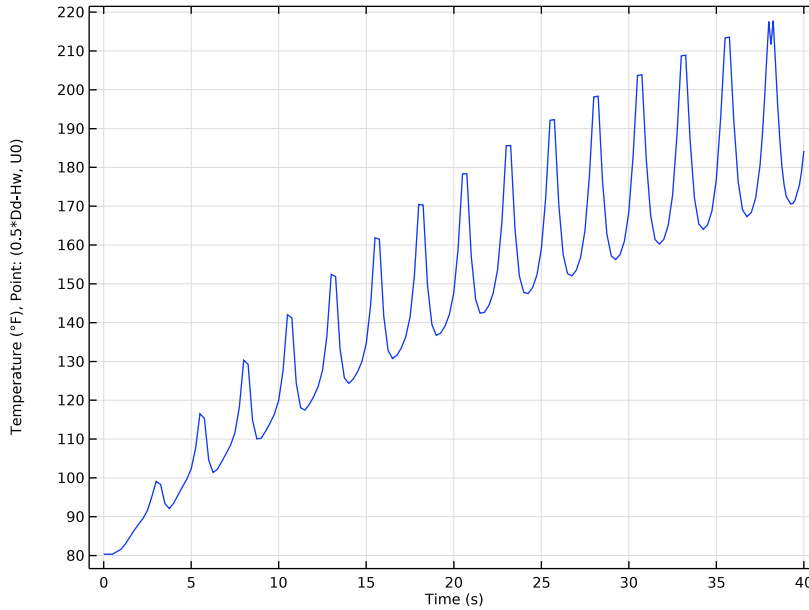


Figure 4: Temperature at the probe position.

Figure 5 shows the temperature variation along the inner wall of the damper after 10 s and 40 s of loading. It clearly shows that the temperature at the probe position does not represent the maximum temperature within the damper. This supports the conclusion drawn in Ref. 1, where the choice of the probe positioning was limited by the construction of the outer shell of the damper. Figure 5 also shows that the temperature near the center of the damper increases by about 100 degrees already after few loading cycles.

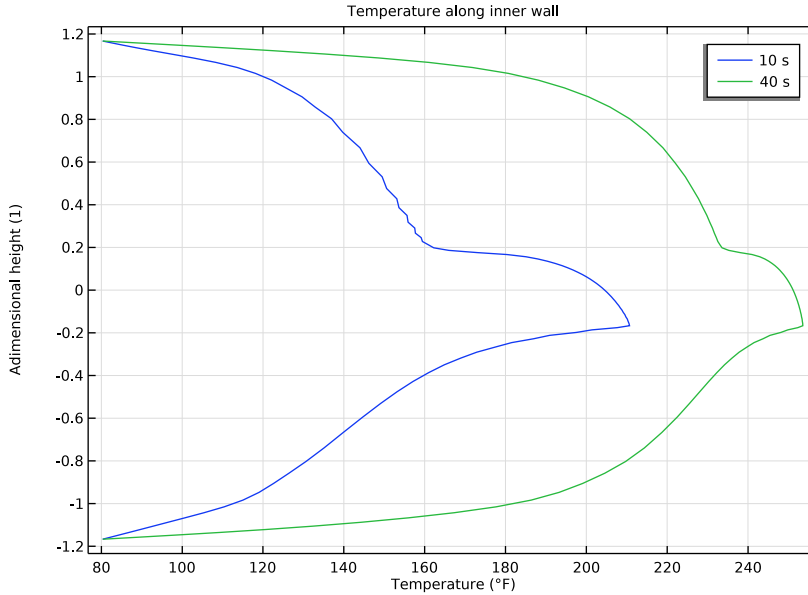


Figure 5: Temperature of the damper inner wall. The probe position corresponds to $z/U_0 = 1$.

Notes About the COMSOL Implementation

You decompose the computational domain into several parts and mesh the domains with mapped meshes to resolve the very thin annular space. For the moving mesh you prescribe the displacement of the mesh in each domain so that their alignment remains unchanged with a zero displacement at the top and the bottom of the damper cylinder housing connecting to the high-performance seal, and the displacement equal to that of the piston head is used for the domain lined up with the piston head. This is achieved by specifying the mesh displacement field as a linear function of the deformed mesh frame coordinate and the reference (material) frame coordinate.

The steel material needed for the damper solid parts is available in the built-in material library. You create a user-defined material for the silicone oil. Such damping fluids are typically characterized by the density, kinematic viscosity at the temperature 25°C, and so-called *viscosity temperature coefficient*, $VTC = 1 - (\text{viscosity at } 98.9^\circ\text{C}) / (\text{viscosity at } 37.8^\circ\text{C})$. Using this parameter, you create the linear correlation for the dynamic viscosity given by Equation 1.

References


1. C.J. Black and N. Makris, “Viscous Heating of Fluid Dampers Under Small and Large Amplitude Motions: Experimental Studies and Parametric Modeling,” *J. Eng. Mech.*, vol. 133, pp. 566–577, 2007.
2. G.L. Morini, “Viscous Heating in Liquid Flows in Micro-Channels,” *Int. J. Heat Mass Transfer*, vol. 48, pp. 3637–3647, 2005.

Application Library path: CFD_Module/Nonisothermal_Flow/fluid_damper




Modeling Instructions

From the **File** menu, choose **New**.

NEW


In the **New** window, click  **Model Wizard**.

MODEL WIZARD

- 1 In the **Model Wizard** window, click  **2D Axisymmetric**.
- 2 In the **Select Physics** tree, select **Heat Transfer > Conjugate Heat Transfer > Laminar Flow**.
- 3 Click **Add**.
- 4 Click  **Study**.
- 5 In the **Select Study** tree, select **General Studies > Time Dependent**.
- 6 Click  **Done**.

GLOBAL DEFINITIONS

Parameters I

- 1 In the **Model Builder** window, under **Global Definitions** click **Parameters I**.
- 2 In the **Settings** window for **Parameters**, locate the **Parameters** section.
- 3 Click  **Load from File**.
- 4 Browse to the model’s Application Libraries folder and double-click the file `fluid_damper_parameters.txt`.

Piston Displacement



- 1 In the **Home** toolbar, click  **Functions** and choose **Global > Analytic**.

- 2 In the **Settings** window for **Analytic**, locate the **Definition** section.
- 3 In the **Expression** text field, type $a_0 \sin(2\pi f t)$.
- 4 In the **Arguments** text field, type t .
- 5 Locate the **Units** section. In the table, enter the following settings:

| Argument | Unit |
|----------|------|
| t | s |



- 6 In the **Function** text field, type m .
- 7 Locate the **Plot Parameters** section. In the table, enter the following settings:

| Plot | Argument | Lower limit | Upper limit | Fixed value | Unit |
|----------------|----------|-------------|-------------|-------------|------|
| $\sqrt{\quad}$ | t | 0 | 40 | 0 | s |

- 8 Click  **Plot**.
- 9 Click the  **Zoom Extents** button in the **Graphics** toolbar.
- 10 In the **Function name** text field, type z_p .
- 11 In the **Label** text field, type **Piston Displacement**.


DEFINITIONS

Variables 1


- 1 In the **Definitions** toolbar, click  **Local Variables**.
- 2 In the **Settings** window for **Variables**, locate the **Variables** section.
- 3 Click  **Load from File**.
- 4 Browse to the model's Application Libraries folder and double-click the file `fluid_damper_variables.txt`.

GEOMETRY 1


Rectangle 1 (r1)

- 1 In the **Geometry** toolbar, click  **Rectangle**.
- 2 In the **Settings** window for **Rectangle**, locate the **Size and Shape** section.
- 3 In the **Width** text field, type $D_r/2$.
- 4 In the **Height** text field, type $2L_d$.
- 5 Locate the **Position** section. In the **z** text field, type $-L_d$.


Rectangle 2 (r2)

- 1 In the **Geometry** toolbar, click  **Rectangle**.
- 2 In the **Settings** window for **Rectangle**, locate the **Size and Shape** section.
- 3 In the **Width** text field, type $Dp/2$.
- 4 In the **Height** text field, type $2*Ld$.
- 5 Locate the **Position** section. In the **z** text field, type $-Ld$.




Rectangle 3 (r3)

- 1 In the **Geometry** toolbar, click  **Rectangle**.
- 2 In the **Settings** window for **Rectangle**, locate the **Size and Shape** section.
- 3 In the **Width** text field, type $Dd/2-Hw$.
- 4 In the **Height** text field, type $2*Ld$.
- 5 Locate the **Position** section. In the **z** text field, type $-Ld$.

Rectangle 4 (r4)

- 1 In the **Geometry** toolbar, click  **Rectangle**.
- 2 In the **Settings** window for **Rectangle**, locate the **Size and Shape** section.
- 3 In the **Width** text field, type $Dd/2$.
- 4 In the **Height** text field, type $2*Ld$.
- 5 Locate the **Position** section. In the **z** text field, type $-Ld$.

Rectangle 5 (r5)

- 1 In the **Geometry** toolbar, click  **Rectangle**.
- 2 In the **Settings** window for **Rectangle**, locate the **Size and Shape** section.
- 3 In the **Width** text field, type $Dd/2$.
- 4 In the **Height** text field, type $2*Lp$.
- 5 Locate the **Position** section. In the **z** text field, type $-Lp$.
- 6 In the **Geometry** toolbar, click  **Build All**.
- 7 Click the  **Zoom Extents** button in the **Graphics** toolbar.

The model geometry is now complete.

LAMINAR FLOW (SPF)



- 1 In the **Model Builder** window, under **Component 1 (comp1)** click **Laminar Flow (spf)**.
- 2 Select Domains 4 and 6–9 only.

HEAT TRANSFER IN SOLIDS AND FLUIDS (HT)

Fluid 1

- 1 In the **Model Builder** window, under **Component 1 (comp1) > Heat Transfer in Solids and Fluids (ht)** click **Fluid 1**.
- 2 Select Domains 4 and 6–9 only.
- 3 In the **Settings** window for **Fluid**, locate the **Thermodynamics, Fluid** section.
- 4 From the **Fluid type** list, choose **Gas/Liquid**.
- 5 From the γ list, choose **User defined**.

ADD MATERIAL

- 1 In the **Materials** toolbar, click  **Add Material** to open the **Add Material** window.
- 2 Go to the **Add Material** window.
- 3 In the tree, select **Built-in > Steel AISI 4340**.
- 4 Click the **Add to Component** button in the window toolbar.
- 5 In the **Materials** toolbar, click  **Add Material** to close the **Add Material** window.

MATERIALS

In the following steps, you create a new material for the damping fluid, **Silicone Oil**.

Silicone Oil

- 1 In the **Model Builder** window, under **Component 1 (comp1)** right-click **Materials** and choose **Blank Material**.
- 2 In the **Settings** window for **Material**, type Silicone Oil in the **Label** text field.
- 3 Select Domains 4 and 6–9 only.
- 4 In the **Model Builder** window, expand the **Component 1 (comp1) > Materials > Silicone Oil (mat2)** node, then click **Basic (def)**.
- 5 In the **Settings** window for **Basic**, locate the **Model Inputs** section.
- 6 Click **+ Select Quantity**.
- 7 In the **Physical Quantity** dialog, type temperature in the text field.
- 8 In the tree, select **General > Temperature (K)**.
- 9 Click **OK**.
- 10 In the **Settings** window for **Basic**, locate the **Local Properties** section.

11 In the **Local properties** table, enter the following settings:

| Name | Expression | Unit | Description |
|--------|------------------|---------|-------------|
| nu_25C | $0.0125 [m^2/s]$ | m^2/s | |
| VTC | $0.6 [1]$ | | |

12 In the **Model Builder** window, under **Component 1 (comp1) > Materials** click **Silicone Oil (mat2)**.

13 In the **Settings** window for **Material**, locate the **Material Contents** section.

14 In the table, enter the following settings:

| Property | Variable | Value | Unit | Property group |
|------------------------------------|------------------------------|--|-------------------|----------------|
| Heat capacity at constant pressure | Cp | 2e3 | J/(kg·K) | Basic |
| Density | rho | 950 | kg/m ³ | Basic |
| Thermal conductivity | k_iso ; kii = k_iso, kij = 0 | 22.5 | W/(m·K) | Basic |
| Dynamic viscosity | mu | $nu_{25C} \cdot rho \cdot (1 - VTC \cdot (T - 311 [K]) / (61 [K])) / (1 + VTC \cdot 0.2107)$ | Pa·s | Basic |

HEAT TRANSFER IN SOLIDS AND FLUIDS (HT)

Initial Values I

1 In the **Model Builder** window, under **Component 1 (comp1) > Heat Transfer in Solids and Fluids (ht)** click **Initial Values I**.

2 In the **Settings** window for **Initial Values**, locate the **Initial Values** section.

3 In the T text field, type T_0 .

Temperature I


1 In the **Physics** toolbar, click  **Boundaries** and choose **Temperature**.

2 Select Boundaries 2, 7, 9, 14, 16, 21, 23, and 28 only. These are the upper and lower boundaries of the cylinder.

3 In the **Settings** window for **Temperature**, locate the **Temperature** section.

4 In the T_0 text field, type T_0 .

Heat Flux 1


- 1 In the **Physics** toolbar, click  **Boundaries** and choose **Heat Flux**.
- 2 Select Boundaries 29–31 only.
- 3 In the **Settings** window for **Heat Flux**, locate the **Heat Flux** section.
- 4 From the **Flux type** list, choose **Convective heat flux**.
- 5 In the h text field, type hwall.
- 6 In the T_{ext} text field, type T0.

LAMINAR FLOW (SPF)


- 1 In the **Model Builder** window, under **Component 1 (comp1)** click **Laminar Flow (spf)**.
- 2 In the **Settings** window for **Laminar Flow**, locate the **Physical Model** section.
- 3 From the **Compressibility** list, choose **Incompressible flow**.

Because the damper is a closed container, you need to pinpoint the pressure level within. To achieve that, use the point constraint as follows.

Pressure Point Constraint 1


- 1 In the **Physics** toolbar, click  **Points** and choose **Pressure Point Constraint**.
- 2 Select Point 12 only.

Wall 2

- 1 In the **Physics** toolbar, click  **Boundaries** and choose **Wall**.
- 2 Select Boundaries 22, 24, and 26 only.
- 3 In the **Settings** window for **Wall**, click to expand the **Wall Movement** section.
- 4 From the **Translational velocity** list, choose **Manual**.

COMPONENT 1 (COMP1)


Prescribed Deformation 1

- 1 In the **Physics** toolbar, click  **Moving Mesh** and choose **Prescribed Deformation**.
- 2 In the **Settings** window for **Prescribed Deformation**, locate the **Prescribed Deformation** section.
- 3 Specify the dx vector as

| | |
|---------|---|
| 0 | R |
| $zp(t)$ | Z |

- 4 Select Domains 2, 5, 8, and 11 only.


Prescribed Deformation 2

- 1 In the **Moving Mesh** toolbar, click  **Prescribed Deformation**.
- 2 In the **Settings** window for **Prescribed Deformation**, locate the **Prescribed Deformation** section.
- 3 Specify the dx vector as

| | |
|-------|---|
| 0 | R |
| z1in1 | Z |

- 4 Select Domains 1, 4, 7, and 10 only.

Prescribed Deformation 3


- 1 In the **Moving Mesh** toolbar, click  **Prescribed Deformation**.
- 2 In the **Settings** window for **Prescribed Deformation**, locate the **Prescribed Deformation** section.
- 3 Specify the dx vector as

| | |
|-------|---|
| 0 | R |
| z1in2 | Z |

- 4 Select Domains 3, 6, 9, and 12 only.

MESH I

Mapped 1

In the **Mesh** toolbar, click  **Mapped**.

Distribution 1

- 1 Right-click **Mapped 1** and choose **Distribution**.
- 2 Select Boundaries 23, 25, 27, and 28 only.
- 3 In the **Settings** window for **Distribution**, locate the **Distribution** section.
- 4 From the **Distribution type** list, choose **Predefined**.
- 5 In the **Number of elements** text field, type 4.
- 6 In the **Element ratio** text field, type 4.
- 7 From the **Growth rate** list, choose **Exponential**.
- 8 Select the **Reverse direction** checkbox.

Distribution 2

- 1 In the **Model Builder** window, right-click **Mapped 1** and choose **Distribution**.

- 2 Select Boundaries 1, 5, 8, 12, 15, 19, 22, 26, 29, and 31 only.
- 3 In the **Settings** window for **Distribution**, locate the **Distribution** section.
- 4 From the **Distribution type** list, choose **Predefined**.
- 5 In the **Number of elements** text field, type 32.
- 6 In the **Element ratio** text field, type 8.
- 7 From the **Growth rate** list, choose **Exponential**.
- 8 Select the **Symmetric distribution** checkbox.

Distribution 3

- 1 Right-click **Mapped 1** and choose **Distribution**.
- 2 Select Boundaries 9, 11, 13, and 14 only.
- 3 In the **Settings** window for **Distribution**, locate the **Distribution** section.
- 4 From the **Distribution type** list, choose **Predefined**.
- 5 In the **Number of elements** text field, type 30.
- 6 In the **Element ratio** text field, type 10.
- 7 From the **Growth rate** list, choose **Exponential**.
- 8 Select the **Symmetric distribution** checkbox.

Distribution 4

- 1 Right-click **Mapped 1** and choose **Distribution**.
- 2 Select Boundaries 16, 18, 20, and 21 only.
- 3 In the **Settings** window for **Distribution**, locate the **Distribution** section.
- 4 In the **Number of elements** text field, type 8.

Distribution 5

- 1 Right-click **Mapped 1** and choose **Distribution**.
- 2 Select Boundaries 3, 10, 17, 24, and 30 only.
- 3 In the **Settings** window for **Distribution**, locate the **Distribution** section.
- 4 In the **Number of elements** text field, type 32.

Distribution 6

- 1 Right-click **Mapped 1** and choose **Distribution**.
- 2 Select Boundaries 2, 4, 6, and 7 only.
- 3 In the **Model Builder** window, right-click **Mesh 1** and choose **Build All**.
The mesh is now complete. It should look similar to that shown in [Figure 2](#).

DEFINITIONS

Domain Point Probe 1

- 1 In the **Definitions** toolbar, click  **Probes** and choose **Domain Point Probe**.

During the computation, a plot of the temperature at the probe position will be displayed and updated. Set it up as follows.

- 2 In the **Settings** window for **Domain Point Probe**, locate the **Point Selection** section.
- 3 In row **Coordinates**, set **r** to $Dd/2 - Hw$.
- 4 In row **Coordinates**, set **z** to $U0$.


Point Probe Expression 1 (ppb1)

- 1 In the **Model Builder** window, expand the **Domain Point Probe 1** node, then click **Point Probe Expression 1 (ppb1)**.
- 2 In the **Settings** window for **Point Probe Expression**, type `tempPr` in the **Variable name** text field.
- 3 Locate the **Expression** section. From the **Table and plot unit** list, choose $^{\circ}\text{F}$.

STUDY 1

Step 1: Time Dependent

The simulation starts when the piston is in the lowest position consistent with the steady flow initial conditions. In addition, a finer sampling is defined on the last cycle to obtain a better plot of the velocity.


- 1 In the **Model Builder** window, under **Study 1** click **Step 1: Time Dependent**.
- 2 In the **Settings** window for **Time Dependent**, locate the **Study Settings** section.
- 3 In the **Output times** text field, type `range(0, tstep, (ncycle-1)/f)`
`range((ncycle-1)/f, tstep/2, tmax)`.
- 4 Click to expand the **Results While Solving** section. From the **Update at** list, choose **Times stored in output**.
- 5 In the **Study** toolbar, click  **Compute**.

RESULTS

Change the unit of the temperature results to degrees Fahrenheit for the sake of easier comparison with the experimental measurements.

Preferred Units 1

- 1 In the **Results** toolbar, click  **Configurations** and choose **Preferred Units**.



- 2 In the **Settings** window for **Preferred Units**, locate the **Units** section.
- 3 Click  **Add Physical Quantity**.
- 4 In the **Physical Quantity** dialog, select **General > Temperature (K)** in the tree.
- 5 Click **OK**.
- 6 In the **Settings** window for **Preferred Units**, locate the **Units** section.
- 7 In the table, enter the following settings:

| Quantity | Unit | Preferred unit |
|-------------|------|----------------|
| Temperature | K | °F |


- 8 Click  **Apply**.

To produce a 3D plot of the temperature field and the flow streamlines within the damper, add a plot from **Result Templates**. The plot should appear similar to that shown in [Figure 3](#). Start with creating additional Cut Plane datasets for plotting the streamlines.

Cut Plane 1

- 1 In the **Results** toolbar, click  **Cut Plane**.
- 2 In the **Settings** window for **Cut Plane**, locate the **Plane Data** section.
- 3 From the **Plane type** list, choose **General**.
- 4 From the **Plane entry method** list, choose **Point and normal vector**.
- 5 Find the **Normal vector** subsection. In the **x** text field, type 1.
- 6 In the **z** text field, type 0.
- 7 Click  **Plot** to visualize the orientation of the cut plane.


Cut Plane 2

- 1 Right-click **Cut Plane 1** and choose **Duplicate**.
- 2 In the **Settings** window for **Cut Plane**, locate the **Plane Data** section.
- 3 Find the **Normal vector** subsection. In the **y** text field, type 1.
- 4 Click  **Plot**.

RESULT TEMPLATES

Create a 3D temperature plot by adding one from the result templates.

- 1 In the **Results** toolbar, click  **Result Templates** to open the **Result Templates** window.
- 2 Go to the **Result Templates** window.


- 3 In the tree, select **Study 1/Solution 1 (sol1) > Heat Transfer in Solids and Fluids > Temperature (ht)**.
- 4 Click the **Add Result Template** button in the window toolbar.
- 5 In the **Results** toolbar, click  **Result Templates** to close the **Result Templates** window.

RESULTS



Temperature and Velocity Streamlines

In the **Settings** window for **3D Plot Group**, type **Temperature and Velocity Streamlines** in the **Label** text field.

Streamline Surface 1

- 1 In the **Temperature and Velocity Streamlines** toolbar, click  **More Plots** and choose **Streamline Surface**.
- 2 In the **Settings** window for **Streamline Surface**, locate the **Data** section.
- 3 From the **Dataset** list, choose **Cut Plane 1**.
- 4 From the **Solution parameters** list, choose **From parent**.
- 5 Click **Replace Expression** in the upper-right corner of the **Expression** section. From the menu, choose **Component 1 (comp1) > Laminar Flow > Velocity and pressure > u,v,w - Velocity field (spatial frame)**.
- 6 Locate the **Streamline Positioning** section. From the **Positioning** list, choose **Uniform density**.
- 7 In the **Density level** text field, type **7.2**.
- 8 Locate the **Coloring and Style** section. Find the **Point style** subsection. From the **Color** list, choose **Black**.

Streamline Surface 2

- 1 Right-click **Streamline Surface 1** and choose **Duplicate**.
- 2 In the **Settings** window for **Streamline Surface**, locate the **Data** section.
- 3 From the **Dataset** list, choose **Cut Plane 2**.
- 4 Click to expand the **Title** section. From the **Title type** list, choose **None**.
- 5 In the **Temperature and Velocity Streamlines** toolbar, click  **Plot**.
- 6 Click the  **Zoom Extents** button in the **Graphics** toolbar.

Inner Wall Temperature at End-of-Stroke Position

- 1 In the **Model Builder** window, under **Results** click **Probe Plot Group 1**.


2 In the **Settings** window for **ID Plot Group**, type Inner Wall Temperature at End-of-Stroke Position in the **Label** text field.

3 Locate the **Legend** section. Clear the **Show legends** checkbox.

This plot shows the temperature variation at the probe position over the complete loading time period, it should look similar to that shown in [Figure 4](#).

Temperature Along Inner Wall

Now set up the plot that shows the temperature distribution along the damper inner wall at times 10 s and 40 s, it should look like that shown in [Figure 5](#).

1 In the **Results** toolbar, click  **ID Plot Group**.

2 In the **Settings** window for **ID Plot Group**, type Temperature Along Inner Wall in the **Label** text field.

Line Graph 1

1 Right-click **Temperature Along Inner Wall** and choose **Line Graph**.

2 In the **Settings** window for **Line Graph**, locate the **y-Axis Data** section.

3 In the **Expression** text field, type $z/U0$.

4 Locate the **x-Axis Data** section. From the **Parameter** list, choose **Expression**.

5 Select Boundaries 22, 24, and 26 only.

6 Click to expand the **Legends** section. Select the **Show legends** checkbox.

Temperature Along Inner Wall

1 In the **Model Builder** window, click **Temperature Along Inner Wall**.

2 In the **Settings** window for **ID Plot Group**, click to expand the **Title** section.

3 From the **Title type** list, choose **Manual**.

4 In the **Title** text area, type Temperature along inner wall.

5 Locate the **Plot Settings** section. Select the **x-axis label** checkbox.

6 Select the **y-axis label** checkbox. In the associated text field, type Adimensional height (1).

7 Locate the **Data** section. From the **Time selection** list, choose **From list**.

8 In the **Times (s)** list, choose **10** and **40**.

9 In the **Temperature Along Inner Wall** toolbar, click  **Plot**.

Surface Average 1

Finally, plot the average velocity within the damper over the last cycle.

1 In the **Model Builder** window, expand the **Results > Derived Values** node.

- 2 Right-click **Results** > **Derived Values** and choose **Average** > **Surface Average**.
- 3 Select Domains 4 and 6–9 only.
- 4 In the **Settings** window for **Surface Average**, locate the **Data** section.
- 5 From the **Time selection** list, choose **From list**.
- 6 In the **Times (s)** list, choose **38.75**, **38.875**, **39**, **39.125**, **39.25**, **39.375**, **39.5**, **39.625**, **39.75**, **39.875**, and **40**.
- 7 Locate the **Expressions** section. In the table, enter the following settings:

| Expression | Unit | Description |
|------------|------|--------------------|
| spf.U | m/s | Velocity magnitude |

- 8 Click  **Evaluate**.

Average Velocity Over the Last Cycle


- 1 In the **Results** toolbar, click  **ID Plot Group**.
- 2 In the **Settings** window for **ID Plot Group**, type **Average Velocity Over the Last Cycle** in the **Label** text field.
- 3 Locate the **Title** section. From the **Title type** list, choose **Manual**.
- 4 In the **Title** text area, type **Temperature along inner wall**.

Table Graph 1

- 1 Right-click **Average Velocity Over the Last Cycle** and choose **Table Graph**.
- 2 In the **Settings** window for **Table Graph**, locate the **Data** section.
- 3 From the **Table** list, choose **Table 2**.

4 In the **Average Velocity Over the Last Cycle** toolbar, click  **Plot**.

