



Model created in COMSOL Multiphysics 6.4

# Domain Activation and Deactivation

## *Introduction*

---

Heating of an object from alternating regions is one example where the modeling technique of activating and deactivating physics on domains can be useful. This example demonstrates how you can apply this technique using the LiveLink™ for MATLAB®.

## *Model Definition*

---

Assume that you want to study the heat distribution in a larger copper plate as it is heated by a steel plate that is moved between various locations. The hot steel plate remains in each spot on the base plate for two minutes before being moved to the next.

In [Figure 1](#) the copper plate is shown in orange. All four locations of the steel plate are present in the geometry, but only one of those is active at any given time. Assume that the hot plate moves instantaneously every two minutes by deactivating the old and activating a new domain in the figure. The active domains are shown in blue, and are also marked with a filled circle.

The heat is conducted between the steel plate, with an initial temperature of 500 K, and the copper plate through a thin thermally resistive layer. The copper plate is cooled by the

surrounding air, a process which you model with convective cooling using a heat transfer coefficient.


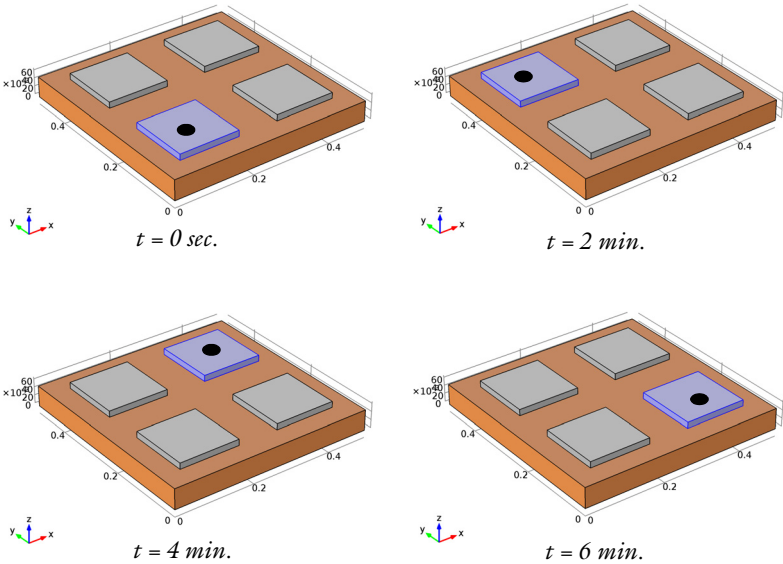


Figure 1: Model geometry with the copper plate in orange and the active steel plate in blue marked by a filled circle.

### Results and Discussion


Figure 2 shows the temperature at two of the corners and in the middle of the top surface of the copper plate. While the temperature is increasing at all three locations the corners

show a larger fluctuation in temperature due to the steel plate alternating between locations close by or further away from the points.

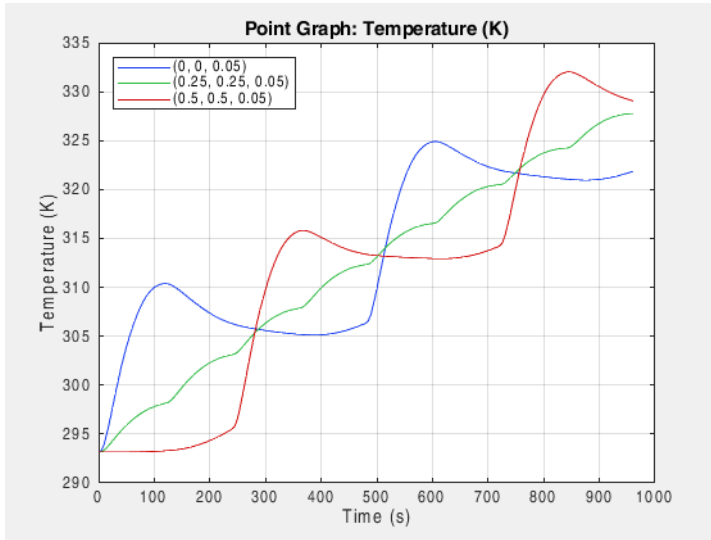

*Figure 2: The temperature at two of the corners and in the middle of the top surface of the copper plate.*

You can follow the temperature distribution in the copper plate as it heats up during the time frame of the simulation in [Figure 3](#).

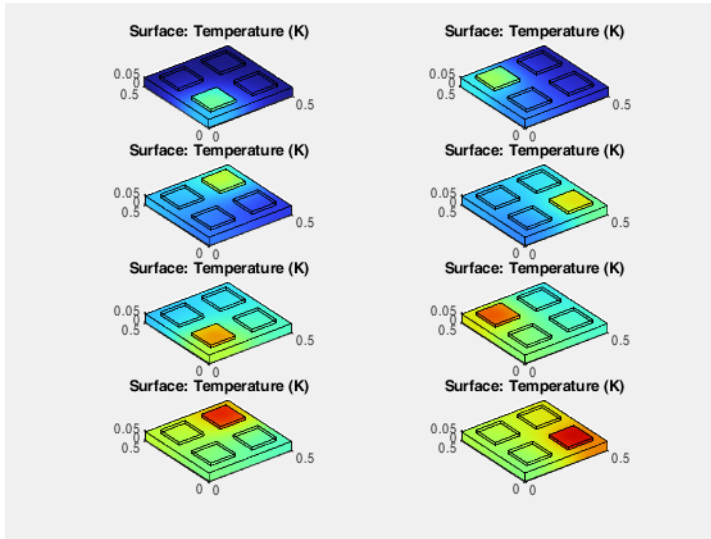

*Figure 3: Temperature distribution in the copper plate.*

### *Notes About the COMSOL Implementation*

---

In addition to the activation and deactivation of domains this example demonstrates other important modeling techniques, namely

- How to use a box selection for moving boundary conditions
- How to use the previous solution as initial condition in selected domains.

The most efficient approach for this simulation is to start by setting up the heat transfer problem in the graphical user interface of the COMSOL Desktop<sup>®</sup>. You can then save the model \*.mph file, which you can easily load into MATLAB<sup>®</sup>, where you continue to implement the script for solving the model.

Wrapper functions used by the script:

- **mphopen** to load the model .mph file.
- **mphglobal** to evaluate global quantities in the model.
- **mphplot** to display plots.

---

**Application Library path:** LiveLink\_for\_MATLAB/Tutorials/  
domain\_activation\_llmatlab

---

### *Modeling Instructions* — MATLAB®

---

In this section you find a detailed explanation of the commands you need to enter at the MATLAB command line in order to run the simulation.

#### **1 Start COMSOL with MATLAB.**

You now have two possibilities to continue:

- Enter each command, starting at step 2 below, at the MATLAB command line.
- Paste the full model script, included in the section [Model M-File](#), into a text editor, then save the file with a “.m” extension, and finally run this file in MATLAB.

#### **2 Load the model containing the heat transfer simulation:**

```
model = mphopen('domain_activation_llmatlab');
```

---

**Note:** See the section *Modeling Instructions* — *COMSOL Desktop* for the modeling instruction of the model .mph file domain\_activation\_llmatlab.mph.

---

#### **3 Enter the following command to create a list of domain indices that correspond to the activation order of the domains:**

```
domInd = [2,3,5,4];
```

#### **4 Create a shortcut to the heat transfer physics interface by typing the following:**

```
ht = model.physics('ht');
```

#### **5 Create a for-loop with eight iterations:**

```
for i = 1:8
```

#### **6 The next command defines the variable k as the modulus of the division of the iteration number by 8. Use this variable in step 8 below to define which domain becomes active in the current iteration.**

```
k = mod(i,4);
```

#### **7 Type the following commands to prevent k to be null:**

```
if k == 0
```

```
k = 4;  
end
```

- 8** The heat transfer physics interface should be active only on the copper plate, domain 1, and the currently active steel plate, domain k. Set the top plate selection feature node 'sel1':

```
model.component('comp1').selection('sel1').set(domInd(k));
```

- 9** Solve the model:

```
model.study('std1').run;
```

Once the solution of the first iteration is computed you need make some changes in the model object before continuing the analysis.

- 10** First, create a cut point dataset to plot the temperature at points (0;0;L/10), (L/2;L/2;L/10), and (L;L;L/10), then create the plot group for the plot. Enter:

```
if i==1  
    cpt1 = model.result.dataset.create('cpt1', 'CutPoint3D');  
    cpt1.set('pointx', '0 L/2 L');  
    cpt1.set('pointy', '0 L/2 L');  
    cpt1.set('pointz', 'L/10');  
    pg1 = model.result.create('pg1', 'PlotGroup1D');  
    pg1.set('data', 'cpt1');  
    pg1.set('legendpos', 'upperleft');  
    ptgr1 = pg1.feature.create('ptgr1', 'PointGraph');  
    ptgr1.set('legend', 'on');
```

- 11** Set up a 3D surface plot to display the temperature distribution in the model by typing the following:

```
pg2 = model.result.create('pg2', 'PlotGroup3D');  
surf1 = pg2.feature.create('surf1', 'Surface');  
surf1.set('rangecoloractive', 'on');  
surf1.set('rangecolormax', '350');  
surf1.set('rangecolormin', '293.15');
```

- 12** After the first iteration the copper plate should use the previous solution as the initial condition. Do this by specifying the temperature variable T in the init1 feature:

```
ht.feature('init1').set('T', 1, 'T');
```

- 13** To change the solver settings so that the initial value points the solution stored in sol1 enter:

```
v1 = model.sol('sol1').feature('v1');  
v1.set('initsol', 'sol1');  
end
```

The following steps apply to all iterations.

- 14** Display the first plot group in a MATLAB figure:

```

figure(1)
mphplot(model, 'pg1', 'rangenum', 1)
hold on

```

- 15** Add a second figure to display a 3D plot of the temperature distribution for each iteration:

```

figure(2)
subplot(4,2,i)
pg2.setIndex('looplevel', '25', 0)
mphplot(model, 'pg2');

```

- 16** Use the function **mphglobal** to extract the value of the simulation stop time of the current iteration. Use this to update the solver start time for the next iteration:

```

time = mphglobal(model, 't', 'solnum', 'end');
model.param.set('t0', time);

```

- 17** Display the iteration number and close the for-loop:

```

disp(sprintf('End of iteration No. %d', i));
end

```

#### MODEL M-FILE

Below you find the full script of the model. You can copy it and paste it into a text editor and save it with the “.m” extension. To run the script in MATLAB make sure that the path to the folder containing the script is set in MATLAB, then type the filename without the “.m” extension at the MATLAB prompt.

```

model = mphopen('domain_activation_llmatlab');

domInd = [2,3,5,4];
ht = model.physics('ht');

for i = 1:8
    k = mod(i,4);
    if k == 0
        k = 4;
    end
    model.component('comp1').selection('sel1').set(domInd(k));

    model.study('std1').run;

    if i==1
        cpt1 = model.result.dataset.create('cpt1', 'CutPoint3D');
        cpt1.set('pointx', '0 L/2 L');
        cpt1.set('pointy', '0 L/2 L');
        cpt1.set('pointz', 'L/10');
        pg1 = model.result.create('pg1', 'PlotGroup1D');
        pg1.set('data', 'cpt1');
    end
end

```

```

pg1.set('legendpos', 'upperleft');
ptgr1 = pg1.feature.create('ptgr1', 'PointGraph');
ptgr1.set('legend', 'on');
pg2 = model.result.create('pg2', 'PlotGroup3D');
surf1 = pg2.feature.create('surf1', 'Surface');
surf1.set('rangecoloractive', 'on');
surf1.set('rangecolormax', '350');
surf1.set('rangecolormin', '293.15');

ht.feature('init1').set('T', 1, 'T');

v1 = model.sol('sol1').feature('v1');
v1.set('initsol', 'sol1');
end

figure(1)
mphplot(model, 'pg1', 'rangenum', 1)
hold on

figure(2)
subplot(4,2,i)
pg2.setIndex('looplevel', '25', 0);
mphplot(model, 'pg2');

time = mphglobal(model, 't', 'solnum', 'end');
model.param.set('t0', time);

disp(sprintf('End of iteration No.%d', i));
end

```


## *Modeling Instructions — COMSOL Desktop*

---



Use the COMSOL Desktop to set-up the heat transfer simulation. You can later load this example into MATLAB, using LiveLink™, to continue the model implementation.

From the **File** menu, choose **New**.

### **NEW**

In the **New** window, click  **Model Wizard**.

### **MODEL WIZARD**

- 1 In the **Model Wizard** window, click  **3D**.
- 2 In the **Select Physics** tree, select **Heat Transfer > Heat Transfer in Solids (ht)**.
- 3 Click **Add**.
- 4 Click  **Study**.

5 In the **Select Study** tree, select **General Studies > Time Dependent**.

6 Click  **Done**.

## GLOBAL DEFINITIONS

### Parameters 1

1 In the **Model Builder** window, under **Global Definitions** click **Parameters 1**.

2 In the **Settings** window for **Parameters**, locate the **Parameters** section.

3 In the table, enter the following settings:

Name	Expression	Value	Description
L	50[cm]	0.5 m	Side length of the base
l	15[cm]	0.15 m	Side length of the plates
T0	500[K]	500 K	Initial temperature of the plates
h0	50[W/(m <sup>2</sup> *K)]	50 W/(m <sup>2</sup> *K)	Heat transfer coefficient
ds	10[um]	1E-5 m	Contact gap thickness
ks	2e-2[W/(m*K)]	0.02 W/(m*K)	Thermal conductivity of air
period	2[min]	120 s	Applied time per plate
t0	0	0	Initial time
dt	5[s]	5 s	Output time step
tf	t0+period	120 s	Final time

## GEOMETRY 1

### Block 1 (blk1)

1 In the **Geometry** toolbar, click  **Block**.

2 In the **Settings** window for **Block**, locate the **Size and Shape** section.

3 In the **Width** text field, type L.

4 In the **Depth** text field, type L.

5 In the **Height** text field, type L/10.

### Block 2 (blk2)


1 In the **Geometry** toolbar, click  **Block**.

2 In the **Settings** window for **Block**, locate the **Size and Shape** section.

3 In the **Width** text field, type l.

- 4 In the **Depth** text field, type 1.
- 5 In the **Height** text field, type 1/10.
- 6 Locate the **Position** section. In the **x** text field, type L/10.
- 7 In the **y** text field, type L/10.
- 8 In the **z** text field, type L/10.

#### *Array 1 (arr1)*


- 1 In the **Geometry** toolbar, click  **Transforms** and choose **Array**.
- 2 Select the object **blk2** only.
- 3 In the **Settings** window for **Array**, locate the **Size** section.
- 4 In the **x size** text field, type 2.
- 5 In the **y size** text field, type 2.
- 6 Locate the **Displacement** section. In the **x** text field, type L/2.
- 7 In the **y** text field, type L/2.

#### *Form Union (fin)*


In the **Model Builder** window, right-click **Form Union (fin)** and choose **Build Selected**.

### **DEFINITIONS**



#### *Top\_plate*

- 1 In the **Definitions** toolbar, click  **Explicit**.
- 2 In the **Settings** window for **Explicit**, type Top\_plate in the **Label** text field.
- 3 Select Domain 2 only.



#### *Base\_plate*

- 1 In the **Definitions** toolbar, click  **Explicit**.
- 2 In the **Settings** window for **Explicit**, type Base\_plate in the **Label** text field.
- 3 Select Domain 1 only.


#### *Union 1*

- 1 In the **Definitions** toolbar, click  **Union**.
- 2 In the **Settings** window for **Union**, locate the **Input Entities** section.
- 3 Under **Selections to add**, click  **Add**.
- 4 In the **Add** dialog, in the **Selections to add** list, choose **Top\_plate** and **Base\_plate**.
- 5 Click **OK**.



### *Adjacent I*

- 1 In the **Definitions** toolbar, click  **Adjacent**.
- 2 In the **Settings** window for **Adjacent**, locate the **Input Entities** section.
- 3 Under **Input selections**, click  **Add**.
- 4 In the **Add** dialog, select **Top\_plate** in the **Input selections** list.
- 5 Click **OK**.


### *Box I*

- 1 In the **Definitions** toolbar, click  **Box**.
- 2 In the **Settings** window for **Box**, locate the **Geometric Entity Level** section.
- 3 From the **Level** list, choose **Boundary**.
- 4 Locate the **Box Limits** section. In the **x minimum** text field, type  $-1e-3$ .
- 5 In the **x maximum** text field, type  $L+1e-3$ .
- 6 In the **y minimum** text field, type  $-1e-3$ .
- 7 In the **y maximum** text field, type  $L+1e-3$ .
- 8 In the **z minimum** text field, type  $L/10-1e-3$ .
- 9 In the **z maximum** text field, type  $L/10+1e-3$ .
- 10 Locate the **Output Entities** section. From the **Include entity if** list, choose **Entity inside box**.


### *Intersection I*



- 1 In the **Definitions** toolbar, click  **Intersection**.
- 2 In the **Settings** window for **Intersection**, locate the **Geometric Entity Level** section.
- 3 From the **Level** list, choose **Boundary**.
- 4 Locate the **Input Entities** section. Under **Selections to intersect**, click  **Add**.
- 5 In the **Add** dialog, in the **Selections to intersect** list, choose **Adjacent I** and **Box I**.
- 6 Click **OK**.

## **MATERIALS**

In the **Materials** toolbar, click  **Browse Materials**.

## **MATERIAL BROWSER**


- 1 In the **Material Browser** window, select **Built-in > Structural steel** in the tree.
- 2 Click  **Add to Component**.
- 3 In the tree, select **Built-in > Copper**.

- 4 Click  **Add to Component**.
- 5 Click  **Done**.
- 6 Select Domain 1 only.


## HEAT TRANSFER IN SOLIDS (HT)

- 1 In the **Model Builder** window, under **Component 1 (comp1)** click **Heat Transfer in Solids (ht)**.
- 2 In the **Settings** window for **Heat Transfer in Solids**, locate the **Domain Selection** section.
- 3 From the **Selection** list, choose **Union 1**.


### *Initial Values 2*

- 1 In the **Physics** toolbar, click  **Domains** and choose **Initial Values**.
- 2 In the **Settings** window for **Initial Values**, locate the **Domain Selection** section.
- 3 From the **Selection** list, choose **Top\_plate**.
- 4 Locate the **Initial Values** section. In the  $T$  text field, type  $T_0$ .

### *Heat Flux 1*

- 1 In the **Physics** toolbar, click  **Boundaries** and choose **Heat Flux**.
- 2 In the **Settings** window for **Heat Flux**, locate the **Boundary Selection** section.
- 3 From the **Selection** list, choose **Box 1**.
- 4 Locate the **Heat Flux** section. From the **Flux type** list, choose **Convective heat flux**.
- 5 In the  $h$  text field, type  $h_0$ .

### *Thin Layer 1*

- 1 In the **Physics** toolbar, click  **Boundaries** and choose **Thin Layer**.
- 2 In the **Settings** window for **Thin Layer**, locate the **Boundary Selection** section.
- 3 From the **Selection** list, choose **Intersection 1**.

## MATERIALS

### *Material 3 (mat3)*


- 1 In the **Model Builder** window, under **Component 1 (comp1)** right-click **Materials** and choose **Blank Material**.
- 2 In the **Settings** window for **Material**, locate the **Geometric Entity Selection** section.
- 3 From the **Geometric entity level** list, choose **Boundary**.
- 4 From the **Selection** list, choose **Box 1**.

5 Locate the **Material Contents** section. In the table, enter the following settings:


Property	Variable	Value	Unit	Property group
Thermal conductivity	k_iso ; kii = k_iso, kij = 0	ks	W/(m·K)	Basic
Density	rho	0	kg/m <sup>3</sup>	Basic
Heat capacity at constant pressure	Cp	0	J/(kg·K)	Basic
Thickness	lth	ds	m	Shell

### MESH 1

#### Free Quad 1

- 1 In the **Mesh** toolbar, click  **More Generators** and choose **Free Quad**.
- 2 In the **Settings** window for **Free Quad**, locate the **Boundary Selection** section.
- 3 From the **Selection** list, choose **Box 1**.

#### Swept 1

In the **Mesh** toolbar, click  **Swept**.


#### Distribution 1

- 1 Right-click **Swept 1** and choose **Distribution**.
- 2 Select Domains 2–5 only.
- 3 In the **Settings** window for **Distribution**, locate the **Distribution** section.
- 4 In the **Number of elements** text field, type 2.

#### Distribution 2

- 1 In the **Model Builder** window, right-click **Swept 1** and choose **Distribution**.
- 2 Select Domain 1 only.
- 3 In the **Settings** window for **Distribution**, locate the **Distribution** section.
- 4 In the **Number of elements** text field, type 3.

#### Size

- 1 In the **Model Builder** window, under **Component 1 (comp1) > Mesh 1** click **Size**.
- 2 In the **Settings** window for **Size**, locate the **Element Size** section.
- 3 From the **Predefined** list, choose **Finer**.
- 4 Click  **Build All**.

## STUDY 1

### *Step 1: Time Dependent*

- 1 In the **Model Builder** window, under **Study 1** click **Step 1: Time Dependent**.
- 2 In the **Settings** window for **Time Dependent**, locate the **Study Settings** section.
- 3 In the **Output times** text field, type `range(t0,dt,tf)`.

## SAVE THE MODEL

- 1 You can now save the model in the COMSOL format, from the **File** menu select **Save**.
- 2 Browse to a directory which path is set in MATLAB and enter `domain_activation_11matlab` in the **File name** text field.
- 3 Click **Save**.