



Model created in COMSOL Multiphysics 6.4

Pyrolysis of Wood with Time-Integrated Objective

Introduction

The process of pyrolyzing wood to produce tar and charcoal has been important since ancient times. Tar was used to impregnate wood for ships, and char was essential for iron smelting. Material for both of these applications have later been replaced by fossil sources, but environmental concerns has since kindled the interest for products produced by pyrolyzing wood.

Pyrolysis is thermal decomposition in the absence of an oxidizing atmosphere. In other words; heat something up without air until it decomposes. Historically, tar and charcoal were produced in piles, or pits, where wood was covered with for example dirt to prevent air from reaching the inside of the pile. The wood was lit on fire and allowed to smolder, but not burn (combust). During smoldering (pyrolysis), volatile species, water, and light decomposition products, leave the solid, resulting in charcoal. In modern times, steel reactors with an inert atmosphere are used.

The products that result from pyrolysis will depend on the feedstock type and particle size, the heating rate, the final temperature, and the duration of the process. Due to the complexity of the reaction mechanism, so called lumped-reaction models are often used. The reaction products are lumped into pseudospecies based on their phase, which gives a simplified reaction scheme that can be used for engineering purposes. One such reaction scheme is seen in [Figure 1](#).

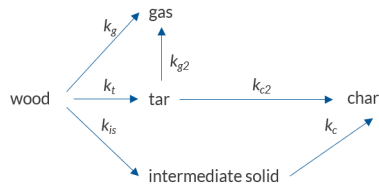


Figure 1: The reaction scheme used in this model consists of four pseudospecies, namely gas (g), tar (t), intermediate solid (is), and char (c).

The scheme was proposed by Park and others ([Ref. 1](#)) to describe the pyrolysis of a wooden sphere, approximately 1 cm in diameter, inserted into a hot furnace. The experimental setup is illustrated in [Figure 2](#).

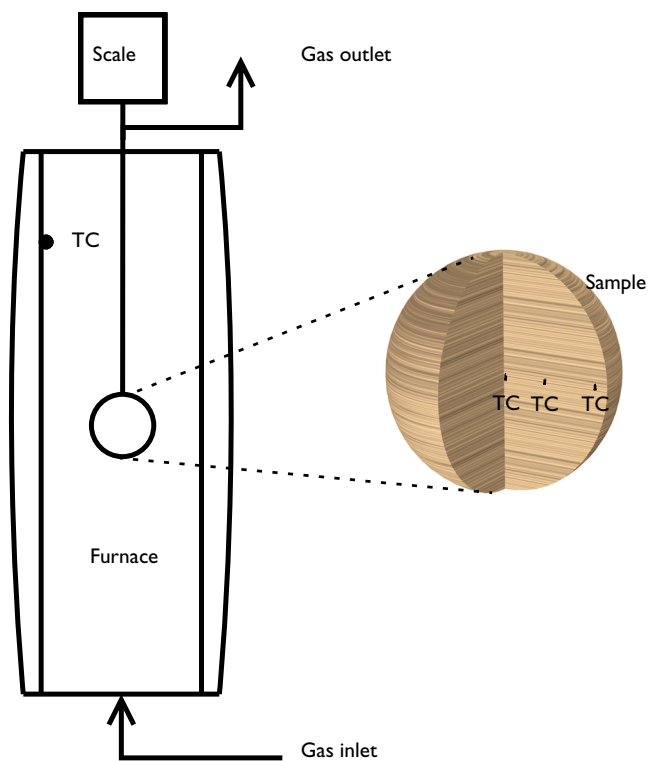


Figure 2: The experimental system setup consists of an isothermal furnace with inert atmosphere, a sample holder attached to a scale, and thermocouples (TC) measuring the temperature of the system. The sample radius is approximately 1 cm.

The experimental system consists of an isothermal furnace with inert atmosphere. The temperature of the furnace, measured by thermocouples (TC), is kept constant, and the inert atmosphere is achieved by nitrogen flowing through the furnace chamber. For each experiment, the sample is inserted into the isothermal furnace, and the sample temperature and the sample mass are recorded during the pyrolysis process. The temperature gradient within the sample is significant and the temperature is thus measured at three positions within the sample; at the surface, mid and center position. Wood is a porous, anisotropic material and in this study the temperature was measured along the fibers in the horizontal direction.

The reaction scheme in [Figure 1](#) describes both primary and secondary pyrolysis reactions. The primary decomposition steps will convert wood into the pseudospecies gas, tar, and

intermediate solid. Gaseous species are those that do not condense at room temperature, for example carbon monoxide. Tar species are all the condensable volatiles, for example water, carboxylic acids and phenols. The gases and the tars leaving the particle result in mass loss. On its way out from the porous particle, the tar may decompose to form gas or char. The intermediate solid further converts into char.

Experimental results from Ref. 1 showing development of the sample mass and the temperature are shown in Figure 3.

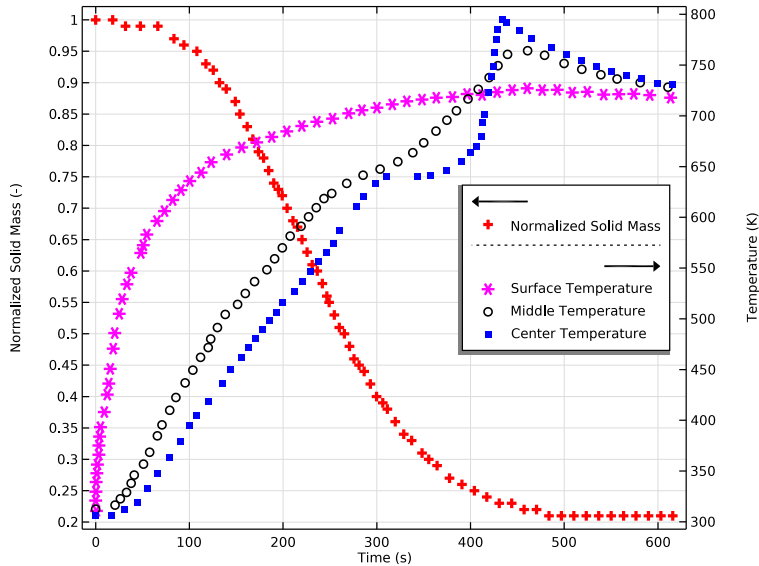


Figure 3: Experimental data from Ref. 1. The mass has been normalized by the initial sample mass.

This example model, based on Ref. 1 and Ref. 2, consists of two parts. The first part demonstrates how to set up a model describing the pyrolysis process, heat, and momentum transfer in an anisotropic wood sphere. In the second part, parameter estimation is used to optimize the model using the experimental data in Figure 3. The parameters to be estimated are one Arrhenius constant, two reaction heats, and one external heat transfer coefficient (see Table 1).

Model Definition

The pyrolysis of a centimeter-sized wood particle presents a fully coupled multiphysics problem with mass transfer, fluid flow and heat transfer. In this example, both the conductive heat transfer and the permeability of the solid are anisotropic.

MASS TRANSPORT

The pyrolysis reaction scheme in [Figure 1](#) consists of gaseous and solid species. The reaction rate expressions ($\text{kg}/(\text{m}^3 \cdot \text{s})$), for the solid species wood (w), intermediate solid (is), and char (c) are expressed in terms of their respective density in the manner of

$$\frac{\partial \rho_w}{\partial t} = -(k_t - k_g - k_{is})\rho_w \quad (1)$$

$$\frac{\partial \rho_{is}}{\partial t} = k_{is}\rho_w - k_c\rho_{is} \quad (2)$$

and

$$\frac{\partial \rho_c}{\partial t} = k_c\rho_{is} + k_{c2}\rho_t \quad (3)$$

The density is defined as the bulk density of the solid, and thus includes the porosity ε of the solid domain. k_i is the Arrhenius rate constant (1/s), as indicated in the reaction scheme ([Figure 1](#))

$$k_i = A_i \exp(-E_i/(RT)) \quad (4)$$

No transport terms are needed for the solid species, and [Equation 1](#)–[Equation 3](#) are thus sufficient to conserve the mass of the solid species.

The mass conservation equation for the gas species i includes diffusion, convection, and the reaction rate terms. The gas mixture inside the particle consists solely of gas, tar, and inert gas, the mass balance is expressed in terms of the respective mass fractions ω as

$$\varepsilon \rho \frac{\partial \omega_i}{\partial t} + \nabla \cdot \mathbf{j}_i + \rho(\mathbf{u} \cdot \nabla)\omega_i = R_i \quad (5)$$

Here, ρ is the density of the fluid in the pores, derived using the ideal gas law, and ε is the porosity of the porous domain:

$$\varepsilon = 1 - \frac{\rho_w + \rho_{is} + \rho_c}{\rho_{w,0}} (1 - \varepsilon_{w0})$$

The initial wood porosity, ε_{w0} , is 0.4.

In Equation 5, \mathbf{j}_i is the diffusional flux as described by Fick's law, with diffusion coefficients D_i , and a Millington and Quirk model to derive the effective diffusivity:

$$\mathbf{j}_i = -\rho \left(\varepsilon^{4/3} D_i \nabla \omega_i - \omega_i \sum_k D_k \nabla \omega_k \right)$$

The mass averaged velocity of the mixture in the pores, \mathbf{u} , is derived using Darcy's law:

$$\mathbf{u} = -\frac{\kappa}{\mu} \nabla p \quad (6)$$

Here, μ is the viscosity (kg/(m·s)), p is the pressure (Pa), and κ is the effective permeability (m²):

$$\kappa_j = \frac{\rho_w \kappa_{w,j} + (\rho_{is} + \rho_c) \kappa_{c,j}}{\rho_w + \rho_{is} + \rho_c}$$

where j indicates *across* or *along* the fiber direction.

The reaction rate expressions for the gas phase species tar (t) and gas (g) are

$$R_t = \rho \frac{\partial \omega_t}{\partial t} = k_t \rho_w - k_{c2} \rho \omega_t - k_{g2} \rho \omega_t$$

and

$$R_g = \rho \frac{\partial \omega_g}{\partial t} = k_g \rho_w + k_{g2} \rho \omega_t$$

Mass transfer through the exterior boundary of the particle is dominated by convection. A boundary condition assuming no diffusive flux is thus applicable:

$$-\mathbf{n} \cdot \mathbf{j}_i = 0$$

Here, \mathbf{n} denotes the outward pointing normal of the exterior boundary.

MOMENTUM TRANSPORT

The fluid flow is defined with the continuity equations

$$\frac{\partial \rho}{\partial t} + \nabla \cdot (\rho \mathbf{u}) = Q_m$$

with a Darcian flow (see Equation 6), and a mass source term (evolution of fluid species) defined as

$$Q_m = k_t \rho_w - k_{c2} \rho \omega_t + k_g \rho_w \quad (7)$$

At the exterior boundary, a zero relative pressure with respect to the reference pressure ($p_{\text{ref}} = 1 \text{ atm}$) is prescribed:

$$p = 0$$

HEAT TRANSPORT

The energy balance equation applied to the fluid (f) in the pores, and the solid bulk (b) of the wood sample assumes local thermal equilibrium, and considers heat transfer through convection, radiation, and conduction:

$$(\rho C_p)_{\text{eff}} \frac{\partial T}{\partial t} + \nabla \cdot (-k_{\text{eff}} \nabla T) + \rho_f C_{p,f} (\mathbf{u} \cdot \nabla) T = Q \quad (8)$$

Here, Q is the heat of reaction

$$Q = -\rho_w (k_t \Delta H_t + k_g \Delta H_g + k_{is} \Delta H_{is}) - \rho_{is} k_c \Delta H_c - \rho_t k_{g2} \Delta H_{g2} - \rho_t k_{c2} \Delta H_{c2} \quad (9)$$

In Equation 8 $(\rho C_p)_{\text{eff}}$ is defined as

$$(\rho C_p)_{\text{eff}} = \varepsilon \rho_f C_{p,f} + \rho_b C_{p,b}$$

The heat capacities at constant pressures for the fluid and bulk phases are

$$C_{p,f} = \omega_t C_{p,t} + \omega_{N2} C_{p,N2} + \omega_g C_{p,g}$$

and

$$C_{p,b} = \frac{(C_{p,w} \rho_w + C_{p,c} (\rho_{is} + \rho_c))}{\rho_{w,0}}$$

The dry bulk density ρ_b is $(1 - \varepsilon) \rho_{w,0}$ and the fluid density ρ_f is derived from the ideal gas law.

The effective thermal conductivity is the weighted sum of the conductivity of the fluid, k_f , of the solid bulk, k_b , as well as a contribution from the radiation in the pores:

$$k_{\text{eff}} = \varepsilon k_f + k_b + \varepsilon \frac{13.5 \sigma T^3 d_{\text{eff}}}{e}$$

where σ is the Boltzmann constant ($\text{W}/(\text{m}^2 \cdot \text{K}^4)$), e is the emissivity, and d_{eff} is the effective pore diameter (m) defined as the weighted sum of the pore diameter in the wood and the char:

$$d_{\text{eff}} = d_w(1 - \eta) + d_c \eta$$

The degree of pyrolysis, η is

$$\eta = 1 - \frac{(\rho_w + \rho_{\text{is}})}{\rho_{w,0}}$$

The conductivity of the solid bulk is anisotropic

$$k_{b,j} = \frac{\rho_w k_{w,j} + (\rho_{\text{is}} + \rho_c) k_{c,j}}{\rho_w + \rho_{\text{is}} + \rho_c}$$

where j indicates *across* or *along* the fiber direction.

The external boundary of the particle has a heat flux boundary condition:

$$-\mathbf{n} \cdot \mathbf{q} = q_0$$

where the heat flux q_0 is the sum of convective and radiative heat flux:

$$q_0 = h_{\text{conv}}(T_{\text{gas}} - T) + \sigma e_s (T_{\text{reactor}}^4 - T^4) \quad (10)$$

Here, h_{conv} is the heat transfer coefficient in the gas surrounding the particle, T_{gas} is the gas temperature in the reactor, σ is the Stefan–Boltzmann constant, e_s is the surface emissivity, T_{reactor} is the reactor temperature, and T is the surface temperature of the sample. All temperatures are expressed in K.

PARAMETER ESTIMATION

Parameter estimation problems consist of three components: (i) experimental data; (ii) a forward model that represents the physics of the experiments; and (iii) an optimization algorithm that compares the two and updates the model parameters to minimize the difference. This can be formulated mathematically as a nonlinear least-squares minimization problem, but in this model we will use an **Interpolation** function to convert the experimental data to a time varying function, so that the objective can be expressed as

$$\mathbf{q}_{\text{opt}} = \underset{\mathbf{q}}{\text{argmin}} \left(\sum_{n=1}^N Q_n \right) \quad (11)$$

with

$$Q_n = \frac{1}{2} \int_0^{t_{\text{end}}} [P_n \mathbf{u}(\mathbf{q}), \mathbf{q}, t) - \hat{P}_n(t)]^2 dt \quad (12)$$

Herein, \mathbf{q} is the vector of control parameters (ξ) that we want to estimate, N is the number of experiments, $\hat{P}_n(t)$ is the interpolation function of experiment n , and $P_n(\mathbf{u}(\mathbf{q}), \mathbf{q}, t)$ denotes the corresponding model prediction given the PDE solution \mathbf{u} .

In this example, we consider $N=4$ experimental data sets from Ref. 1 (see Figure 3), for which the measured quantity P_n is either the temperature (at one of the thermocouple positions, see Figure 2) or the normalized solid mass, and \mathbf{u} is the solution to the multiphysics model set up to describe the system.

The normalized solid mass Y is defined as

$$Y = \frac{\rho_w + \rho_{\text{is}} + \rho_c}{\rho_{w,0}}. \quad (13)$$

In this model, the control parameters to estimate are $\mathbf{q} = (A_{\text{is}}, \Delta H_t, \Delta H_c, h_{\text{conv}})$, where A_{is} is the Arrhenius frequency factor for the primary pyrolysis step where wood turns to intermediate solid (Equation 4). ΔH_t and ΔH_c are the heat of reaction for formation of tar from wood, and formation of char from intermediate solid (Equation 9). In this model the primary reactions all share the same heat of reactions, namely $\Delta H_t = \Delta H_g = \Delta H_{\text{is}}$. The final control parameter h_{conv} is the convective heat transfer coefficient external to the particle (Equation 10). The parameters along with the initial guess of their values are provided in Table 1.

TABLE 1: PARAMETERS TO ESTIMATE AND THEIR INITIAL VALUES.

Parameter	Name	Initial guess
Arrhenius frequency factor wood -> intermediate solid	A_is	1e7 [1 / s]
Heat of reaction wood -> tar	DH_t	-200 [kJ / kg]

TABLE 1: PARAMETERS TO ESTIMATE AND THEIR INITIAL VALUES.

Parameter	Name	Initial guess
Heat of reaction intermediate solid -> char	DH_c	50 [kJ/kg]
Convective heat transfer coefficient	hconv	5 [W/m ² /K]

Results and Discussion

The results from the forward model, using the initial guess of the parameter values in Table 1, are shown in Figure 4 and Figure 5. The model describes the trends in the temperatures and solid mass quite well, especially for the middle temperature (Figure 5). Both the timings and the absolute values of the peak temperatures for each position are lower than in experiments, and the experimental final solid mass is not captured by the model at all.

The model predictions after parameter estimation are illustrated in Figure 4 and Figure 5. For comparison, the results from the forward model are also included in those figures. It is clear that the optimized model better predicts the experimental results. The timing of the center temperature peak and its value are now captured, as is the final solid mass.

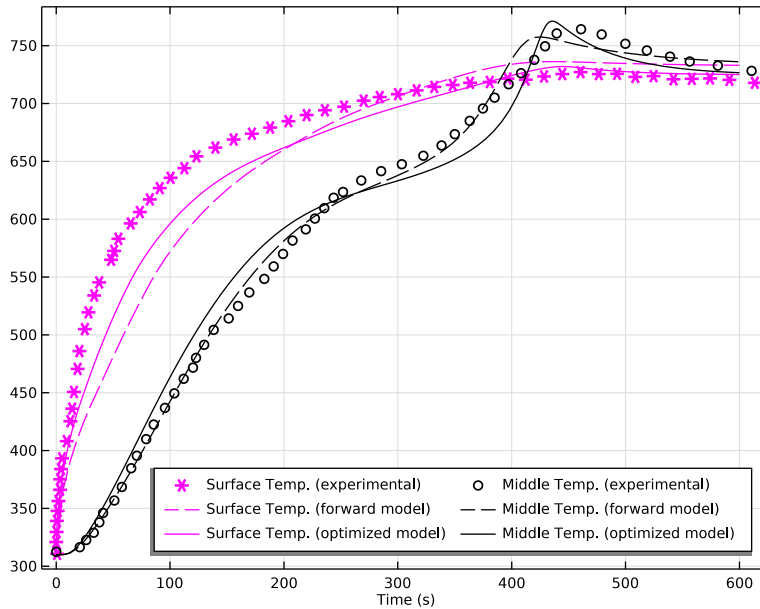


Figure 4: Surface and middle temperatures from the forward and the optimized model.

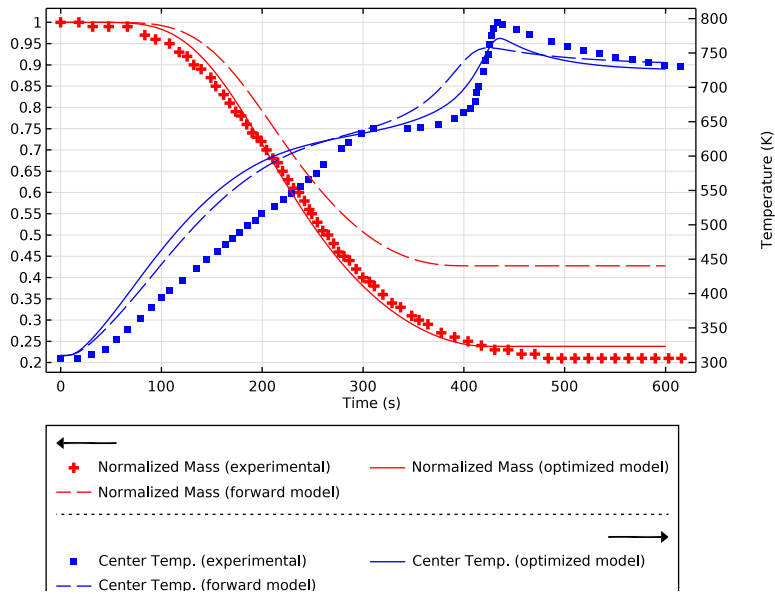


Figure 5: Center temperature and normalized solid mass from the forward and optimized model.

Figure 6 illustrates the changes in solid composition in the particle at three different times. Early in the process, there is mainly wood. This wood is converted into gases and the solid

intermediate species (is). Late in the process, the wood is fully converted, and most of the particle consists of char.

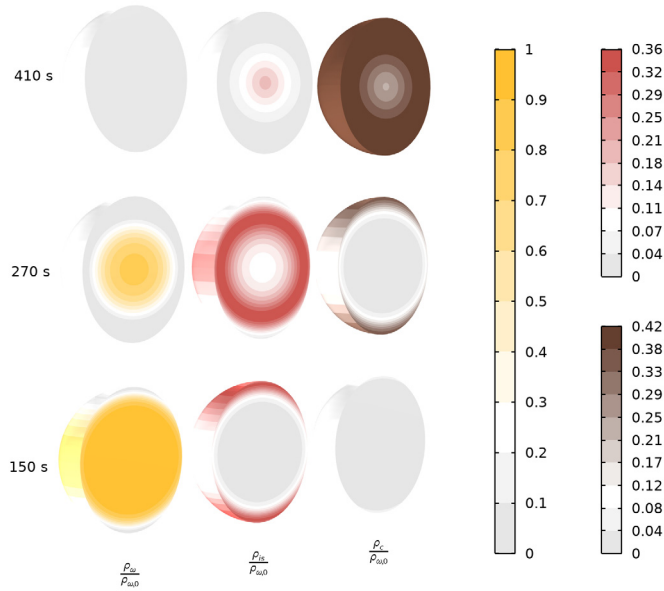


Figure 6: Normalized densities of wood $\rho_w/\rho_{w,0}$, intermediate solid $\rho_{is}/\rho_{w,0}$, and char $\rho_c/\rho_{w,0}$, at three different times.

Figure 4 and Figure 5 above show the temperatures at the thermocouple positions in the particle. Figure 7–Figure 9 illustrate the temperature in the solid domain, together with both the mass source (Q_m in Equation 7) and the heat source (Q in Equation 9). As expected, at an early stage (Figure 7), a positive mass source is accompanied with a

negative heat source, since the primary pyrolysis reactions, producing gaseous species, are endothermic.

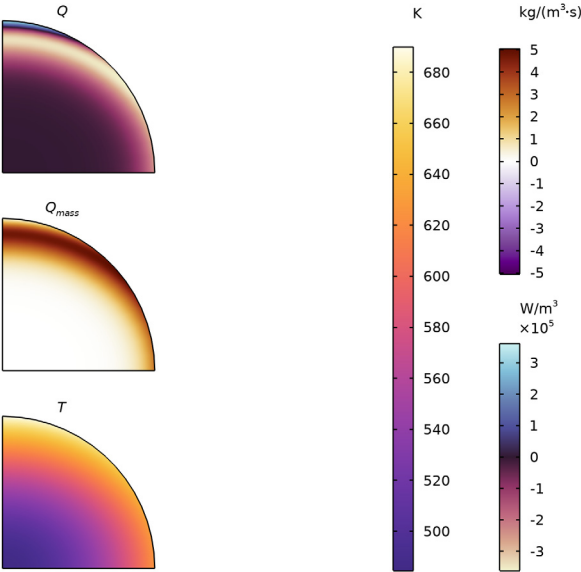


Figure 7: Temperature, mass source, and heat source in the modeled geometry, 150 s into the pyrolysis process.

As the process progresses (Figure 8), the positive mass source moves inward, followed by a positive heat source, indicating the formation of char. This is also seen in Figure 6.

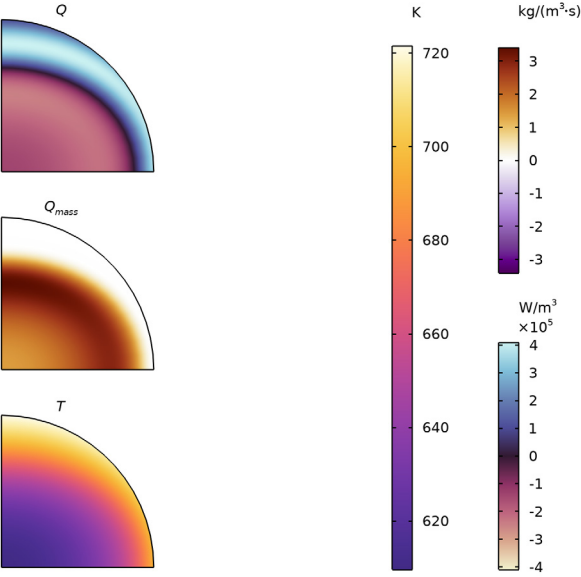


Figure 8: Temperature, mass source, and heat source in the modeled geometry, 270 s into the pyrolysis process.

At the last stage of the mass loss process, depicted in [Figure 9](#), there are practically no gas forming reactions, and only exothermic processes, as seen by a dominating negative mass source and a positive heat source.

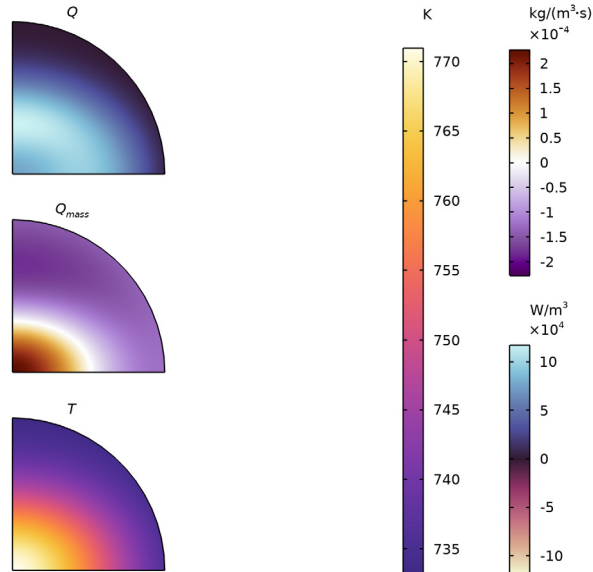


Figure 9: Temperature, mass source, and heat source in the modeled geometry, 433 s into the pyrolysis process. This time corresponds to the temperature peak seen in [Figure 5](#).

One thing seen in [Figure 6](#)-[Figure 9](#) is the anisotropic particle properties. [Figure 10](#) illustrates this further by showing the relative pressure in the particle, p/p_{ref} , the total Darcy velocity magnitude, U , the Darcy velocity vector, \mathbf{u} , the porosity, ϵ , and the solid mass fraction, Y (see [Equation 13](#)).

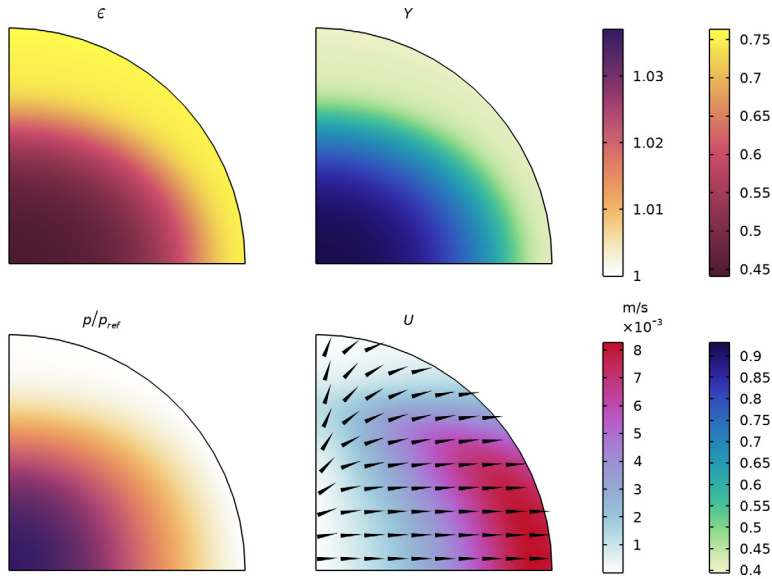


Figure 10: The relative pressure in the particle, p/p_{ref} , the total Darcy velocity magnitude, U , the Darcy velocity, \mathbf{u} , the porosity, ϵ , and the solid mass fraction, Y .

Notes About the COMSOL Implementation

The solid phase reactions in Figure 1 are implemented in the **Domain ODEs and DAEs** interface.

In parameter estimation problems, it is good practice to first set up and test the forward model before solving the inverse problem. In this example, the normalized solid mass, Y , is tracked during computation using a **Domain Probe**. The data associated with this probe is then used in postprocessing to illustrate the data. For the optimization study, create a new domain probe and disable the first one, as otherwise the data from the forward study will be overwritten with the data from the optimization run.

This models does not use the **Parameter Estimation** functionality available in COMSOL Multiphysics. Instead, an objective based on integration is constructed. COMSOL evaluates transient objectives at the final time, so this requires the use of an ODE.

Interpolation functions are used to estimate the transient data between measurements.

For most least-squares problems, the **Levenberg–Marquardt** algorithm with a finite difference approximation of the Jacobian is a robust and efficient choice of optimization solver, but it requires the evaluation of the gradient for every measurement. If this is too time consuming, a gradient-free algorithm like the **BOBYQA** can be used or gradient based method can be used together with an aggregated objective — as demonstrated here. To increase the stability of the optimization process, the logarithm of the control parameters can be optimized. This gives scales of 1, and initial values equal to zero. This strategy is used in this example model together with the gradient based **IPOPT** optimization algorithm.

References

1. W.C. Park, A. Atreya, and H.R. Baum, “Experimental and theoretical investigation of heat and mass transfer processes during wood pyrolysis,” *Combustion and Flame*, vol. 157, pp. 481–494, 2010.
2. X. Shi, F. Ronsse, and J.G. Pieters, “Finite element modeling of intraparticle heterogeneous tar conversion during pyrolysis of woody biomass particles,” *Fuel Processing Technology*, vol. 148, pp. 302–316, 2016.

Application Library path: Optimization_Module/Parameter_Estimation/pyrolysis_wood_odeobj


Modeling Instructions

This model consists of two parts: setting up the forward model and performing parameter estimation to calibrate that model with experimental data. Start by setting up the forward model.




Use the **Model Wizard** to add a Component (2D axisymmetric due to the anisotropic sphere); the physics **Darcy’s Law, Transport of Concentrated Species in Porous Media, Heat Transfer in Porous Media**, and **Domain ODEs and DAEs** (for the solid reactions); and a **Time Dependent** study to follow the decomposition progress.

From the **File** menu, choose **New**.

NEW

In the **New** window, click  **Model Wizard**.


MODEL WIZARD

- 1 In the **Model Wizard** window, click  **2D Axisymmetric**.
- 2 In the **Select Physics** tree, select **Chemical Species Transport** > **Transport of Concentrated Species in Porous Media (tcs)**.
- 3 Click **Add**.
- 4 In the **Select Physics** tree, select **Fluid Flow** > **Porous Media and Subsurface Flow** > **Darcy's Law (dl)**.
- 5 Click **Add**.
- 6 In the **Select Physics** tree, select **Heat Transfer** > **Porous Media** > **Heat Transfer in Porous Media (ht)**.
- 7 Click **Add**.
- 8 In the **Select Physics** tree, select **Mathematics** > **ODE and DAE Interfaces** > **Domain ODEs and DAEs (dode)**.
- 9 Click **Add**.
- 10 In the **Select Physics** tree, select **Mathematics** > **ODE and DAE Interfaces** > **Global ODEs and DAEs (ge)**.
- 11 Click **Add**.
- 12 Click  **Study**.
- 13 In the **Select Study** tree, select **General Studies** > **Time Dependent**.
- 14 Click  **Done**.

Before setting up the geometry, load all the parameters and variables for this model from files. Since we have not yet defined the physics, some of the expressions in the variable files will be undefined at this point.


GLOBAL DEFINITIONS

Sample Properties



- 1 In the **Model Builder** window, under **Global Definitions** click **Parameters I**.
- 2 In the **Settings** window for **Parameters**, type **Sample Properties** in the **Label** text field.
- 3 Locate the **Parameters** section. Click  **Load from File**.
- 4 Browse to the model's Application Libraries folder and double-click the file `pyrolysis_wood_odeobj_sample_properties_parameters.txt`.

Experimental Conditions



- 1 In the **Home** toolbar, click  **Parameters** and choose **Add** > **Parameters**.

- 2 In the **Settings** window for **Parameters**, type Experimental Conditions in the **Label** text field.
- 3 Locate the **Parameters** section. Click  **Load from File**.
- 4 Browse to the model's Application Libraries folder and double-click the file `pyrolysis_wood_odeobj_experimental_conditions_parameters.txt`.

Reaction Parameters


- 1 In the **Home** toolbar, click  **Parameters** and choose **Add > Parameters**.
- 2 In the **Settings** window for **Parameters**, type Reaction Parameters in the **Label** text field.
- 3 Locate the **Parameters** section. Click  **Load from File**.
- 4 Browse to the model's Application Libraries folder and double-click the file `pyrolysis_wood_odeobj_reaction_parameters.txt`.

Optimization Parameters


- 1 In the **Home** toolbar, click  **Parameters** and choose **Add > Parameters**.
- 2 In the **Settings** window for **Parameters**, type Optimization Parameters in the **Label** text field.
- 3 Locate the **Parameters** section. Click  **Load from File**.
- 4 Browse to the model's Application Libraries folder and double-click the file `pyrolysis_wood_odeobj_parameters.txt`.

DEFINITIONS

Solid Species Variables


- 1 In the **Model Builder** window, under **Component 1 (comp1)** right-click **Definitions** and choose **Variables**.
- 2 In the **Settings** window for **Variables**, type Solid Species Variables in the **Label** text field.
- 3 Locate the **Variables** section. Click  **Load from File**.
- 4 Browse to the model's Application Libraries folder and double-click the file `pyrolysis_wood_odeobj_solid_species_variables.txt`.

Reaction Variables

- 1 In the **Model Builder** window, right-click **Definitions** and choose **Variables**.
- 2 In the **Settings** window for **Variables**, type Reaction Variables in the **Label** text field.
- 3 Locate the **Variables** section. Click  **Load from File**.

- 4 Browse to the model's Application Libraries folder and double-click the file `pyrolysis_wood_odeobj_reaction_variables.txt`.

Fluid Species Variables

- 1 Right-click **Definitions** and choose **Variables**.
- 2 In the **Settings** window for **Variables**, type Fluid Species Variables in the **Label** text field.
- 3 Locate the **Variables** section. Click  **Load from File**.
- 4 Browse to the model's Application Libraries folder and double-click the file `pyrolysis_wood_odeobj_fluid_species_variables.txt`.


External Boundary Variables

- 1 Right-click **Definitions** and choose **Variables**.
- 2 In the **Settings** window for **Variables**, type External Boundary Variables in the **Label** text field.
- 3 Locate the **Variables** section. Click the **Load** button. From the menu, choose **Load from File**.
- 4 Browse to the model's Application Libraries folder and double-click the file `pyrolysis_wood_odeobj_surface_variables.txt`.




Set up the geometry. It consists of a quarter of a **Circle**, with a **Circular Arc** used only for meshing, and a **Point** at the location of the middle thermocouple.

GEOMETRY I



Circle 1 (c1)

- 1 In the **Geometry** toolbar, click  **Circle**.
- 2 In the **Settings** window for **Circle**, locate the **Size and Shape** section.
- 3 In the **Radius** text field, type `r_sample`.
- 4 In the **Sector angle** text field, type `90`.



Circular Arc 1 (ca1)

- 1 In the **Geometry** toolbar, click  **More Primitives** and choose **Circular Arc**.
- 2 In the **Settings** window for **Circular Arc**, locate the **Radius** section.
- 3 In the **Radius** text field, type `r_sample/3`.
- 4 Click  **Build All Objects**.
- 5 Click the  **Zoom Extents** button in the **Graphics** toolbar.

Middle Along


- 1 In the **Geometry** toolbar, click  **Point**.
- 2 In the **Settings** window for **Point**, type *Middle Along* in the **Label** text field.
- 3 Locate the **Point** section. In the **r** text field, type *r_sample/2*.
- 4 Click  **Build All Objects**.

Mesh Control Edges 1 (mce1)

- 1 In the **Geometry** toolbar, click  **Virtual Operations** and choose **Mesh Control Edges**.
- 2 On the object **fin**, select **Boundary 7** only.
- 3 In the **Geometry** toolbar, click  **Build All**.

DOMAIN ODES AND DAES (DODE)

In the **Domain ODEs and DAEs** interface, the solid species reaction rates are added. Using this interface allows choosing the unit for the dependent variables, namely the densities.

- 1 In the **Model Builder** window, under **Component 1 (comp1)** click **Domain ODEs and DAEs (dode)**.
- 2 In the **Settings** window for **Domain ODEs and DAEs**, locate the **Units** section.
- 3 Click  **Select Dependent Variable Quantity**.
- 4 In the **Physical Quantity** dialog, type *density* in the text field.
- 5 In the tree, select **General > Density (kg/m³)**.
- 6 Click **OK**.
- 7 In the **Settings** window for **Domain ODEs and DAEs**, locate the **Units** section.
- 8 In the **Source term quantity** table, enter the following settings:

Source term quantity	Unit
Custom unit	kg/(m ³ *s)

- 9 Click to expand the **Dependent Variables** section. In the **Field name (kg/m³)** text field, type *rho*.
- 10 In the **Number of dependent variables** text field, type 3.
- 11 In the **Dependent variables (kg/m³)** table, enter the following settings:

<i>rho_w</i>
<i>rho_is</i>
<i>rho_c</i>

Distributed ODE I

In the **Source Term** fields, add the decomposition rate expressions for the solid species.

- 1 In the **Model Builder** window, under **Component 1 (comp1)** > **Domain ODEs and DAEs (dode)** click **Distributed ODE 1**.
- 2 In the **Settings** window for **Distributed ODE**, locate the **Source Term** section.
- 3 In the f text-field array, type $-(k_t+k_g+k_{is})*rho_w$ on the first row.
- 4 In the f text-field array, type $k_{is}*rho_w-k_c*rho_{is}$ on the second row.
- 5 In the f text-field array, type $k_c*rho_{is}+k_c^2*tcs.rho*w_t$ on the third row. The dependent variable w_t is not yet defined. It will be added in the **Transport of Concentrated Species in Porous Media** Interface.

Initial Values I

- 1 In the **Model Builder** window, click **Initial Values 1**.
- 2 In the **Settings** window for **Initial Values**, locate the **Initial Values** section.
- 3 In the rho_w text field, type rho_w_{init} .

TRANSPORT OF CONCENTRATED SPECIES IN POROUS MEDIA (TCS)

Continue by setting up the mass transfer equations and reactions. The workflow is to first go through the settings for the default features, and then add the features that are needed.

- 1 In the **Model Builder** window, under **Component 1 (comp1)** click **Transport of Concentrated Species in Porous Media (tcs)**.
- 2 In the **Settings** window for **Transport of Concentrated Species in Porous Media**, locate the **Transport Mechanisms** section.
- 3 From the **Diffusion model** list, choose **Fick's law**.
- 4 Click to expand the **Dependent Variables** section. In the **Number of species** text field, type 3.
- 5 In the **Mass fractions (I)** table, enter the following settings:

<u>w_t</u>
<u>w_g</u>
<u>w_N2</u>

- 6 Locate the **Species** section. From the **From mass constraint** list, choose **w_N2**.

Species Molar Masses I

- 1 In the **Model Builder** window, under **Component 1 (comp1)** > **Transport of Concentrated Species in Porous Media (tcs)** click **Species Molar Masses 1**.

- 2 In the **Settings** window for **Species Molar Masses**, locate the **Molar Mass** section.
- 3 In the M_{wt} text field, type Mw_t.
- 4 In the M_{wg} text field, type Mw_g.
- 5 In the M_{wN2} text field, type Mw_N2. The parameters for the molar masses were loaded from file and can be found in the **Sample Properties** node under **Global Definitions**.

Fluid 1

- 1 In the **Model Builder** window, under **Component 1 (comp1) > Transport of Concentrated Species in Porous Media (tcs) > Porous Medium 1** click **Fluid 1**.
- 2 In the **Settings** window for **Fluid**, locate the **Convection** section.
- 3 From the **u** list, choose **Total Darcy velocity field (dl/porous1)**.

Porous Matrix 1

- 1 In the **Model Builder** window, click **Porous Matrix 1**.
- 2 In the **Settings** window for **Porous Matrix**, locate the **Matrix Properties** section.
- 3 In the ϵ_p text field, type epsilon. This parameter was also loaded from file.

Initial Values 1

- 1 In the **Model Builder** window, under **Component 1 (comp1) > Transport of Concentrated Species in Porous Media (tcs)** click **Initial Values 1**.
- 2 In the **Settings** window for **Initial Values**, locate the **Initial Values** section.
- 3 In the $\omega_{0,wt}$ text field, type 0.
- 4 In the $\omega_{0,wg}$ text field, type 0.


Since the geometry we want to model is actually a sphere, add a **Symmetry** boundary condition.

Symmetry 1

- 1 In the **Physics** toolbar, click  **Boundaries** and choose **Symmetry**.
- 2 Select Boundaries 2 and 3 only.


Finally, define the reactions. Add two **Reaction Sources** features: one with the reactions that involve mass transfer to other phases, and one with only gas phase species.

Reaction Sources with Phase Transfer

- 1 In the **Physics** toolbar, click  **Domains** and choose **Reaction Sources**.
- 2 In the **Settings** window for **Reaction Sources**, type Reaction Sources with Phase Transfer in the **Label** text field.
- 3 Select Domain 1 only.

- 4 Locate the **Reactions** section. Select the **Mass transfer to other phases** checkbox.
- 5 In the R_{wt} text field, type $k_t * \rho_w - k_{c2} * w_t * tcs.rho$.
- 6 In the R_{wg} text field, type $k_g * \rho_w$.

Reaction Sources Gas to Gas

- 1 In the **Physics** toolbar, click  **Domains** and choose **Reaction Sources**.
- 2 In the **Settings** window for **Reaction Sources**, type Reaction Sources Gas to Gas in the **Label** text field.
- 3 Select Domain 1 only.
- 4 Locate the **Reactions** section. In the R_{wt} text field, type $-k_{g2} * w_t * tcs.rho$.
- 5 In the R_{wg} text field, type $k_{g2} * w_t * tcs.rho$.

DARCY'S LAW (DL)

Now, define the fluid flow in the system.

Fluid 1

- 1 In the **Model Builder** window, under **Component 1 (comp1) > Darcy's Law (dl) > Porous Medium 1** click **Fluid 1**.
- 2 In the **Settings** window for **Fluid**, locate the **Fluid Properties** section.
- 3 From the ρ list, choose **Density (tcs/porous1/fluid1)**.
- 4 From the μ list, choose **User defined**. In the associated text field, type viscosity.

Porous Matrix 1


- 1 In the **Model Builder** window, click **Porous Matrix 1**.
- 2 In the **Settings** window for **Porous Matrix**, locate the **Matrix Properties** section.
- 3 From the ϵ_p list, choose **User defined**. In the associated text field, type epsilon.
- 4 From the κ list, choose **User defined**. From the list, choose **Diagonal**.
- 5 Specify the κ matrix as

κ_{eff_along}	0
0	κ_{eff_across}

Initial Values 1

Now we have gone through the settings for the default features. Next we need to add a **Mass Source** feature, a **Pressure** boundary condition feature for the external surface, and a **Symmetry** feature.


Mass Source 1

- 1 In the **Physics** toolbar, click  **Domains** and choose **Mass Source**.
- 2 Select Domain 1 only.
- 3 In the **Settings** window for **Mass Source**, locate the **Mass Source** section.
- 4 Click in the Q_m text field, then press Ctrl+Space. From the menu, choose **Component 1 (comp1) > Transport of Concentrated Species in Porous Media > tcs.Qmass - Net mass source - kg/(m³·s)**.

Pressure 1

- 1 In the **Physics** toolbar, click  **Boundaries** and choose **Pressure**.
- 2 Select Boundary 4 only.

Symmetry 1

- 1 In the **Physics** toolbar, click  **Boundaries** and choose **Symmetry**.
- 2 Select Boundaries 2 and 3 only.

HEAT TRANSFER IN POROUS MEDIA (HT)

The last physics interface to set up is the heat transfer interface. Use the same workflow: go through the default features and then add the additional features that you need. In this case, add the features **Symmetry**, **Heat Flux**, and **Heat Source**.

Fluid 1

- 1 In the **Model Builder** window, under **Component 1 (comp1) > Heat Transfer in Porous Media (ht) > Porous Medium 1** click **Fluid 1**.
- 2 In the **Settings** window for **Fluid**, locate the **Heat Convection** section.
- 3 From the **u** list, choose **Total Darcy velocity field (dl/porous1)**.
- 4 Locate the **Model Input** section. From the p_A list, choose **Absolute pressure (dl)**.
- 5 Locate the **Heat Conduction, Fluid** section. From the k_f list, choose **User defined**. In the associated text field, type k_f .
- 6 Locate the **Thermodynamics, Fluid** section. From the ρ_f list, choose **Density (tcs/porous1/fluid1)**.
- 7 From the $C_{p,f}$ list, choose **User defined**. In the associated text field, type cp_f .

Porous Matrix 1

- 1 In the **Model Builder** window, click **Porous Matrix 1**.
- 2 In the **Settings** window for **Porous Matrix**, locate the **Matrix Properties** section.
- 3 From the ϵ_p list, choose **User defined**. In the associated text field, type ϵ_p .

4 Locate the **Heat Conduction, Porous Matrix** section. From the k_b list, choose **User defined**.
From the list, choose **Diagonal**.

5 Specify the k_b matrix as

k_eff_along	0
0	k_eff_across

6 Locate the **Thermodynamics, Porous Matrix** section. From the ρ_b list, choose **User defined**. In the associated text field, type rho_b.

7 From the $C_{p,b}$ list, choose **User defined**. In the associated text field, type cp_b.

Initial Values 1

1 In the **Model Builder** window, under **Component 1 (comp1) > Heat Transfer in Porous Media (ht)** click **Initial Values 1**.

2 In the **Settings** window for **Initial Values**, locate the **Initial Values** section.

3 In the T text field, type T0.

Symmetry 1

1 In the **Physics** toolbar, click  **Boundaries** and choose **Symmetry**.

2 Select Boundaries 2 and 3 only.

Heat Flux 1

1 In the **Physics** toolbar, click  **Boundaries** and choose **Heat Flux**.

2 Select Boundary 4 only.

3 In the **Settings** window for **Heat Flux**, locate the **Heat Flux** section.

4 In the q_0 text field, type q0.

Heat Source 1

1 In the **Physics** toolbar, click  **Domains** and choose **Heat Source**.

2 Select Domain 1 only.

3 In the **Settings** window for **Heat Source**, locate the **Heat Source** section.

4 In the Q_0 text field, type Q.

Before we can compute the study, we need to define the mesh that discretizes the modeling domain into finite elements.

MESH 1


1 In the **Model Builder** window, under **Component 1 (comp1)** click **Mesh 1**.

- 2 In the **Settings** window for **Mesh**, locate the **Sequence Type** section.
- 3 From the list, choose **User-controlled mesh**.

Size

- 1 In the **Model Builder** window, under **Component 1 (comp1) > Mesh 1** click **Size**.
- 2 In the **Settings** window for **Size**, locate the **Element Size** section.
- 3 From the **Predefined** list, choose **Finer**.

Mapped 1

- 1 In the **Mesh** toolbar, click  **Mapped**.
- 2 Drag and drop below **Size**.
- 3 In the **Settings** window for **Mapped**, locate the **Domain Selection** section.
- 4 From the **Geometric entity level** list, choose **Domain**.
- 5 Select Domain 2 only.

Distribution 1

- 1 Right-click **Mapped 1** and choose **Distribution**.
- 2 Select Boundary 5 only.
- 3 In the **Settings** window for **Distribution**, locate the **Distribution** section.
- 4 From the **Distribution type** list, choose **Predefined**.
- 5 In the **Number of elements** text field, type 25.

Distribution 2

- 1 In the **Model Builder** window, right-click **Mapped 1** and choose **Distribution**.
- 2 Select Boundary 7 only.
- 3 In the **Settings** window for **Distribution**, locate the **Distribution** section.
- 4 In the **Number of elements** text field, type 15.

Size 1

- 1 In the **Model Builder** window, right-click **Free Triangular 1** and choose **Size**.
- 2 In the **Settings** window for **Size**, locate the **Geometric Entity Selection** section.
- 3 From the **Geometric entity level** list, choose **Point**.
- 4 Select Point 1 only.
- 5 Locate the **Element Size** section. From the **Predefined** list, choose **Finer**.
- 6 In the **Model Builder** window, right-click **Mesh 1** and choose **Build All**.

STUDY 1: FORWARD MODEL (INITIAL-VALUE BASED)


Set up the study for the forward model. Add the experimental data to compare it to the results from the forward model. We also add a probe to derive Y (the normalized solid mass) at the same time as we compute the study.

- 1 In the **Model Builder** window, click **Study 1**.
- 2 In the **Settings** window for **Study**, type Study 1: Forward Model (Initial-Value Based) in the **Label** text field.
- 3 Locate the **Study Settings** section. Clear the **Generate default plots** checkbox.

Step 1: Time Dependent

- 1 In the **Model Builder** window, under **Study 1: Forward Model (Initial-Value Based)** click **Step 1: Time Dependent**.
- 2 In the **Settings** window for **Time Dependent**, locate the **Study Settings** section.
- 3 In the **Output times** text field, type range(0,0.01*tmax,tmax).
- 4 Click to expand the **Results While Solving** section. From the **Probes** list, choose **None**.
- 5 Locate the **Physics and Variables Selection** section. In the **Solve for** column of the table, under **Component 1 (comp1)**, clear the checkbox for **Global ODEs and DAEs (ge)**.

Solution 1 (sol1)

- 1 In the **Study** toolbar, click  **Show Default Solver**.
- 2 In the **Model Builder** window, expand the **Solution 1 (sol1)** node. The choice **Show Default Solver** creates the node **Solver Configurations** where we can edit the solver settings. Since we know the scales for the dependent variables, we will enter them and not use the default values. If a scale is too high (orders higher than the value of the dependent variable), then we will not get an accurate solution for that variable. If instead the scales are too low, the solver will take more time steps than necessary, giving high accuracy but increasing the computation time.
- 3 In the **Model Builder** window, expand the **Study 1: Forward Model (Initial-Value Based) > Solver Configurations > Solution 1 (sol1) > Dependent Variables 1** node, then click **Pressure (comp1.p)**.
- 4 In the **Settings** window for **Field**, locate the **Scaling** section.
- 5 From the **Method** list, choose **Manual**.
- 6 In the **Model Builder** window, under **Study 1: Forward Model (Initial-Value Based) > Solver Configurations > Solution 1 (sol1) > Dependent Variables 1** click **Dependent Variable Rho_c (comp1.rho_c)**.
- 7 In the **Settings** window for **Field**, locate the **Scaling** section.

- 8 From the **Method** list, choose **Manual**.
- 9 In the **Scale** text field, type rho_w_init.
- 10 In the **Model Builder** window, under **Study 1: Forward Model (Initial-Value Based)** > **Solver Configurations** > **Solution 1 (sol1)** > **Dependent Variables 1** click **Dependent Variable Rho_is (compl.rho_is)**.
- 11 In the **Settings** window for **Field**, locate the **Scaling** section.
- 12 From the **Method** list, choose **Manual**.
- 13 In the **Scale** text field, type rho_w_init.
- 14 In the **Model Builder** window, under **Study 1: Forward Model (Initial-Value Based)** > **Solver Configurations** > **Solution 1 (sol1)** > **Dependent Variables 1** click **Dependent Variable Rho_w (compl.rho_w)**.
- 15 In the **Settings** window for **Field**, locate the **Scaling** section.
- 16 From the **Method** list, choose **Initial-value based**.
- 17 In the **Model Builder** window, under **Study 1: Forward Model (Initial-Value Based)** > **Solver Configurations** > **Solution 1 (sol1)** > **Dependent Variables 1** click **Temperature (compl.T)**.
- 18 In the **Settings** window for **Field**, locate the **Scaling** section.
- 19 From the **Method** list, choose **Initial-value based**.
- 20 In the **Model Builder** window, under **Study 1: Forward Model (Initial-Value Based)** > **Solver Configurations** > **Solution 1 (sol1)** > **Dependent Variables 1** click **Mass Fraction (compl.w_g)**.
- 21 In the **Settings** window for **Field**, locate the **Scaling** section.
- 22 From the **Method** list, choose **Manual**.
- 23 In the **Scale** text field, type 0.1.
- 24 In the **Model Builder** window, under **Study 1: Forward Model (Initial-Value Based)** > **Solver Configurations** > **Solution 1 (sol1)** > **Dependent Variables 1** click **Mass Fraction (compl.w_t)**.
- 25 In the **Settings** window for **Field**, locate the **Scaling** section.
- 26 From the **Method** list, choose **Manual**.
- 27 In the **Scale** text field, type 0.1.



Since we want to compare the forward model with the experimental data, add the experimental data. We should also add a probe to derive Y (the normalized solid mass) while solving the model.

RESULTS

Experimental Data



- 1 In the **Model Builder** window, expand the **Results** node.
- 2 Right-click **Results > Tables** and choose **Node Group**.
- 3 In the **Settings** window for **Group**, type `Experimental Data` in the **Label** text field.

Experimental data: Y

- 1 In the **Results** toolbar, click  **Table**.
- 2 In the **Settings** window for **Table**, locate the **Data** section.
- 3 Click  **Import**.
- 4 Browse to the model's Application Libraries folder and double-click the file `pyrolysis_wood_odeobj_experimental_data_Y.txt`.
- 5 In the **Label** text field, type `Experimental data: Y`.
- 6 Locate the **Column Headers** section. In the table, enter the following settings:

Column	Header
1	t (s)
2	Y


Experimental data: T_surface

- 1 In the **Results** toolbar, click  **Table**.
- 2 In the **Settings** window for **Table**, type `Experimental data: T_surface` in the **Label** text field.
- 3 Locate the **Data** section. Click  **Import**.
- 4 Browse to the model's Application Libraries folder and double-click the file `pyrolysis_wood_odeobj_experimental_data_T_surface.txt`.
- 5 Locate the **Column Headers** section. In the table, enter the following settings:

Column	Header
1	t (s)
2	T (K)


Experimental data: T_middle

- 1 Right-click **Experimental data: T_surface** and choose **Duplicate**.
- 2 In the **Settings** window for **Table**, type `Experimental data: T_middle` in the **Label** text field.

- 3 Locate the **Data** section. Click  **Import**.
- 4 Browse to the model's Application Libraries folder and double-click the file `pyrolysis_wood_odeobj_experimental_data_T_middle.txt`.
- 5 Locate the **Column Headers** section. In the table, enter the following settings:

Column	Header
1	t (s)
2	T (K)


Experimental data: T_center

- 1 Right-click **Experimental data: T_middle** and choose **Duplicate**.
- 2 In the **Settings** window for **Table**, type `Experimental data: T_center` in the **Label** text field.
- 3 Locate the **Data** section. Click  **Import**.
- 4 Browse to the model's Application Libraries folder and double-click the file `pyrolysis_wood_odeobj_experimental_data_T_center.txt`.
- 5 Locate the **Column Headers** section. In the table, enter the following settings:

Column	Header
1	t (s)
2	T (K)

Plot the experimental data. Follow these instructions to generate [Figure 3](#) in the model documentation.

Experimental Data

- 1 In the **Results** toolbar, click  **ID Plot Group**.
- 2 In the **Settings** window for **ID Plot Group**, type `Experimental Data` in the **Label** text field.
- 3 Locate the **Data** section. From the **Dataset** list, choose **None**.
- 4 Click to expand the **Title** section. From the **Title type** list, choose **None**.

Normalized Solid Mass

- 1 Right-click **Experimental Data** and choose **Table Graph**.
- 2 In the **Settings** window for **Table Graph**, locate the **Coloring and Style** section.
- 3 Find the **Line style** subsection. From the **Line** list, choose **None**.
- 4 From the **Color** list, choose **Red**.

- 5 Find the **Line markers** subsection. From the **Marker** list, choose **Plus sign**.
- 6 Click to expand the **Legends** section. Select the **Show legends** checkbox.
- 7 Find the **Include** subsection. Select the **Label** checkbox.
- 8 Clear the **Headers** checkbox.
- 9 In the **Label** text field, type Normalized Solid Mass.

Surface Temperature

- 1 Right-click **Normalized Solid Mass** and choose **Duplicate**.
- 2 In the **Settings** window for **Table Graph**, type Surface Temperature in the **Label** text field.
- 3 Locate the **Data** section. From the **Table** list, choose **Experimental data: T_surface**.
- 4 Locate the **Coloring and Style** section. From the **Color** list, choose **Magenta**.
- 5 Find the **Line markers** subsection. From the **Marker** list, choose **Asterisk**.

Middle Temperature



- 1 Right-click **Surface Temperature** and choose **Duplicate**.
- 2 In the **Settings** window for **Table Graph**, type Middle Temperature in the **Label** text field.
- 3 Locate the **Data** section. From the **Table** list, choose **Experimental data: T_middle**.
- 4 Locate the **Coloring and Style** section. From the **Color** list, choose **Black**.
- 5 Find the **Line markers** subsection. From the **Marker** list, choose **Circle**.

Center Temperature

- 1 Right-click **Middle Temperature** and choose **Duplicate**.
- 2 In the **Settings** window for **Table Graph**, type Center Temperature in the **Label** text field.
- 3 Locate the **Data** section. From the **Table** list, choose **Experimental data: T_center**.
- 4 Locate the **Coloring and Style** section. From the **Color** list, choose **Blue**.
- 5 Find the **Line markers** subsection. From the **Marker** list, choose **Point**.

Experimental Data

- 1 In the **Model Builder** window, click **Experimental Data**.
- 2 In the **Settings** window for **ID Plot Group**, locate the **Plot Settings** section.
- 3 Select the **Two y-axes** checkbox.
- 4 Select the **x-axis label** checkbox. In the associated text field, type Time (s).

- 5 Select the **y-axis label** checkbox. In the associated text field, type Normalized Solid Mass (-).
- 6 Select the **Secondary y-axis label** checkbox. In the associated text field, type Temperature (K).
- 7 In the table, select the **Plot on secondary y-axis** checkboxes for **Surface Temperature**, **Middle Temperature**, and **Center Temperature**.
- 8 Locate the **Legend** section. From the **Position** list, choose **Middle right**.
- 9 In the **Experimental Data** toolbar, click  **Plot**.
- 10 Click the  **Zoom Extents** button in the **Graphics** toolbar.


We need to enter a model expression for the surface temperature. Add a probe feature for this purpose. Also, add the probe to derive Y during computations.

DEFINITIONS

Probes for Parameter Estimation

- 1 In the **Model Builder** window, under **Component 1 (comp1)** right-click **Definitions** and choose **Node Group**.
- 2 In the **Settings** window for **Group**, type Probes for Parameter Estimation in the **Label** text field.

Point Probe Surface

- 1 In the **Definitions** toolbar, click  **Probes** and choose **Point Probe**.
- 2 In the **Settings** window for **Point Probe**, type Point Probe Surface in the **Label** text field.
- 3 In the **Variable name** text field, type T_surface.
- 4 Select Point 4 only.
- 5 Locate the **Expression** section. In the **Expression** text field, type T.
- 6 Select the **Description** checkbox.


Point Probe Middle

- 1 Right-click **Point Probe Surface** and choose **Duplicate**.
- 2 In the **Settings** window for **Point Probe**, type Point Probe Middle in the **Label** text field.
- 3 In the **Variable name** text field, type T_middle.
- 4 Select Point 3 only.

Point Probe Center

- 1 Right-click **Point Probe Middle** and choose **Duplicate**.
- 2 In the **Settings** window for **Point Probe**, type Point Probe Center in the **Label** text field.
- 3 In the **Variable name** text field, type T_center.
- 4 Select Point 1 only.

Domain Probe Y

- 1 In the **Definitions** toolbar, click  **Probes** and choose **Domain Probe**.
- 2 In the **Settings** window for **Domain Probe**, type Domain Probe Y in the **Label** text field.
- 3 In the **Variable name** text field, type domY.
- 4 Locate the **Expression** section. In the **Expression** text field, type Y.
- 5 Select the **Description** checkbox.

STUDY 1: FORWARD MODEL (INITIAL-VALUE BASED)


Now we are ready to compute the forward study.

- 1 In the **Study** toolbar, click  **Compute**.

Before starting the optimization study, verify that the model has conservation of mass. In other words, check that the mass in the system at any time equals the initial mass in the system.


RESULTS

Mass Conservation Check

- 1 In the **Results** toolbar, click  **Evaluation Group**.
- 2 In the **Settings** window for **Evaluation Group**, locate the **Transformation** section.
- 3 From the **Transformation type** list, choose **General**.
- 4 Select the **Keep child nodes** checkbox.
- 5 In the **Column header** text field, type $m(t)/m(0) = 1$.
- 6 In the **Label** text field, type Mass Conservation Check.

Gas and Tar Inside Sample

- 1 Right-click **Mass Conservation Check** and choose **Integration > Surface Integration**.
- 2 In the **Settings** window for **Surface Integration**, type Gas and Tar Inside Sample in the **Label** text field.
- 3 Select Domain 1 only.

4 Locate the **Expressions** section. Click  **Clear Table**.


5 In the table, enter the following settings:

Expression	Unit	Description
$tcs.rho * (w_t+w_g)*epsilon$	kg	Gas + Tar Inside

Gas and Tar Leaving Sample

1 In the **Model Builder** window, right-click **Mass Conservation Check** and choose **Integration > Line Integration**.

2 In the **Settings** window for **Line Integration**, type Gas and Tar Leaving Sample in the **Label** text field.

3 Locate the **Expressions** section. Click  **Clear Table**.

4 Select Boundary 4 only.

5 In the table, enter the following settings:

Expression	Unit	Description
$tcs.ntflux_w_g+tcs.ntflux_w_t$	kg/s	Gas + Tar Leaving

6 Locate the **Data Series Operation** section. From the **Transformation** list, choose **Integral**.


7 Select the **Cumulative** checkbox.

Intermediate + Char

1 Right-click **Mass Conservation Check** and choose **Integration > Surface Integration**.

2 Select Domain 1 only.

3 In the **Settings** window for **Surface Integration**, type Intermediate + Char in the **Label** text field.

4 Locate the **Expressions** section. Click  **Clear Table**.


5 In the table, enter the following settings:

Expression	Unit	Description
$\rho_{is} + \rho_c$	kg	IS + Char

Wood

1 Right-click **Mass Conservation Check** and choose **Integration > Surface Integration**.

2 In the **Settings** window for **Surface Integration**, type Wood in the **Label** text field.


3 Locate the **Expressions** section. Click  **Clear Table**.

4 Select Domain 1 only.


5 In the table, enter the following settings:

Expression	Unit	Description
rho_w	kg	Wood

Mass Conservation Check


- 1 In the **Model Builder** window, click **Mass Conservation Check**.
- 2 In the **Settings** window for **Evaluation Group**, locate the **Transformation** section.
- 3 In the **Expression** text field, type $(int1+int2+int3+int4)$.
- 4 In the **Mass Conservation Check** toolbar, click  **Evaluate**.

MASS CONSERVATION CHECK

- 1 Go to the **Mass Conservation Check** window.
Normalize with the mass of wood at time 0 s.
- 2 In the **Settings** window for **Evaluation Group**, locate the **Transformation** section.
- 3 In the **Expression** text field, type $(int1+int2+int3+int4)/0.0026954$.
- 4 In the **Mass Conservation Check** toolbar, click  **Evaluate**.
- 5 Go to the **Mass Conservation Check** window.
By looking at the values in column 2 in the table of the **Mass Conservation Check**, evaluation group, we see that the mass is conserved with a precision of at least three decimals.

GLOBAL DEFINITIONS

Interpolation 1 (int1)

- 1 In the **Home** toolbar, click  **Functions** and choose **Global > Interpolation**.
- 2 In the **Settings** window for **Interpolation**, locate the **Definition** section.
- 3 From the **Data source** list, choose **Result table**.
- 4 Locate the **Data Column Settings** section. In the table, click to select the cell at row number 1 and column number 3.
- 5 In the **Unit** text field, type s.

Interpolation 2 (int2)

- 1 Right-click **Interpolation 1 (int1)** and choose **Duplicate**.
- 2 In the **Settings** window for **Interpolation**, locate the **Definition** section.
- 3 From the **Table from** list, choose **Experimental data: T_surface**.

4 Locate the **Data Column Settings** section. In the **Unit** text field, type K.

Interpolation 3 (int3)

- 1 Right-click **Interpolation 2 (int2)** and choose **Duplicate**.
- 2 In the **Settings** window for **Interpolation**, locate the **Definition** section.
- 3 From the **Table from** list, choose **Experimental data: T_middle**.

Interpolation 4 (int4)

- 1 Right-click **Interpolation 3 (int3)** and choose **Duplicate**.
- 2 In the **Settings** window for **Interpolation**, locate the **Definition** section.
- 3 From the **Table from** list, choose **Experimental data: T_center**.

DEFINITIONS

Objective

- 1 In the **Model Builder** window, under **Component 1 (comp1)** right-click **Definitions** and choose **Variables**.
- 2 In the **Settings** window for **Variables**, type **Objective** in the **Label** text field.
- 3 Locate the **Variables** section. In the table, enter the following settings:

Name	Expression
obj1	$(\text{domY} - \text{int1}(t))^2$
obj2	$(T_{\text{surface}} - \text{int2}(t))^2 / T_{\text{delta}}^2$
obj3	$(T_{\text{middle}} - \text{int3}(t))^2 / T_{\text{delta}}^2$
obj4	$(T_{\text{center}} - \text{int4}(t))^2 / T_{\text{delta}}^2$

GLOBAL ODES AND DAES (GE)



Global Equations 1 (ODE1)

- 1 In the **Model Builder** window, under **Component 1 (comp1) > Global ODEs and DAEs (ge)** click **Global Equations 1 (ODE1)**.
- 2 In the **Settings** window for **Global Equations**, locate the **Global Equations** section.
- 3 In the table, enter the following settings:

Name	$f(u, ut, utt, t)$ (1)	Initial value (u_0) (1)	Initial value (ut_0) (1/s)
obj	$\text{objt} * t_{\text{max}} - \text{obj1} - \text{obj2} - \text{obj3} - \text{obj4}$	0	0

Now add the Parameter Estimation study.



ADD STUDY

- 1 In the **Home** toolbar, click  **Add Study** to open the **Add Study** window.
- 2 Go to the **Add Study** window.
- 3 Find the **Studies** subsection. In the **Select Study** tree, select **General Studies** > **Time Dependent**.
- 4 Click the **Add Study** button in the window toolbar.
- 5 In the **Home** toolbar, click  **Add Study** to close the **Add Study** window.

STUDY 2: PARAMETER ESTIMATION

- 1 In the **Settings** window for **Study**, type Study 2: Parameter Estimation in the **Label** text field.
- 2 Locate the **Study Settings** section. Clear the **Generate default plots** checkbox.

General Optimization

- 1 In the **Study** toolbar, click  **Optimization** and choose **General Optimization**.
- 2 In the **Settings** window for **General Optimization**, locate the **Optimization Solver** section.
- 3 From the **Method** list, choose **IPOPT**.
- 4 In the **Optimality tolerance** text field, type 0.01.
- 5 Click **Add Expression** in the upper-right corner of the **Objective Function** section. From the menu, choose **Component 1 (comp1)** > **Global ODEs and DAEs** > **comp1.obj - State variable obj - 1**.
- 6 Locate the **Control Variables and Parameters** section. Click  **Add** four times.
- 7 In the table, enter the following settings:

Parameter	Initial value	Scale	Lower bound	Upper bound	Unit
A_is_opt (Control parameter to be optimized)	0	1	A_is_opt t_lower	A_is_opt t_upper	
DH_c_opt (Control parameter to be optimized)	0	1	DH_c_opt t_lower	DH_c_opt t_upper	

Parameter	Initial value	Scale	Lower bound	Upper bound	Unit
DH_t_opt (Control parameter to be optimized)	0	1	DH_t_opt_lower	DH_t_opt_upper	
hconv_opt (Control parameter to be optimized)	0	1	hconv_opt_lower	hconv_opt_upper	


- 8 Click to expand the **Solver Settings** section. Find the **Objective settings** subsection. From the **Objective scaling** list, choose **Initial solution based**.
- 9 Click to expand the **Output** section. From the **Probes** list, choose **None**.

Step 1: Time Dependent

- 1 In the **Model Builder** window, click **Step 1: Time Dependent**.
- 2 In the **Settings** window for **Time Dependent**, locate the **Study Settings** section.
- 3 In the **Output times** text field, type range (0, tmax/120, tmax).

Edit the scales for the dependent variables in the same way as for the Forward Study.

Solution 2 (sol2)

- 1 In the **Study** toolbar, click  **Show Default Solver**.
- 2 In the **Model Builder** window, expand the **Solution 2 (sol2)** node.
- 3 In the **Model Builder** window, expand the **Study 2: Parameter Estimation > Solver Configurations > Solution 2 (sol2) > Dependent Variables 1** node, then click **Pressure (comp1.p)**.
- 4 In the **Settings** window for **Field**, locate the **Scaling** section.
- 5 From the **Method** list, choose **Manual**.
- 6 In the **Model Builder** window, under **Study 2: Parameter Estimation > Solver Configurations > Solution 2 (sol2) > Dependent Variables 1** click **Dependent Variable Rho_c (comp1.rho_c)**.
- 7 In the **Settings** window for **Field**, locate the **Scaling** section.
- 8 From the **Method** list, choose **Manual**.
- 9 In the **Scale** text field, type rho_w_init.
- 10 In the **Model Builder** window, under **Study 2: Parameter Estimation > Solver Configurations > Solution 2 (sol2) > Dependent Variables 1** click **Dependent Variable Rho_is (comp1.rho_is)**.
- 11 In the **Settings** window for **Field**, locate the **Scaling** section.

- 12 From the **Method** list, choose **Manual**.
- 13 In the **Scale** text field, type `rho_w_init`.
- 14 In the **Model Builder** window, under **Study 2: Parameter Estimation > Solver Configurations > Solution 2 (sol2) > Dependent Variables I** click **Dependent Variable Rho_w (compl.rho_w)**.
- 15 In the **Settings** window for **Field**, locate the **Scaling** section.
- 16 From the **Method** list, choose **Initial-value based**.
- 17 In the **Model Builder** window, under **Study 2: Parameter Estimation > Solver Configurations > Solution 2 (sol2) > Dependent Variables I** click **Temperature (compl.T)**.
- 18 In the **Settings** window for **Field**, locate the **Scaling** section.
- 19 From the **Method** list, choose **Initial-value based**.
- 20 In the **Model Builder** window, under **Study 2: Parameter Estimation > Solver Configurations > Solution 2 (sol2) > Dependent Variables I** click **Mass Fraction (compl.w_g)**.
- 21 In the **Settings** window for **Field**, locate the **Scaling** section.
- 22 From the **Method** list, choose **Manual**.
- 23 In the **Scale** text field, type `0.1`.
- 24 In the **Model Builder** window, under **Study 2: Parameter Estimation > Solver Configurations > Solution 2 (sol2) > Dependent Variables I** click **Mass Fraction (compl.w_t)**.
- 25 In the **Settings** window for **Field**, locate the **Scaling** section.
- 26 From the **Method** list, choose **Manual**.
- 27 In the **Scale** text field, type `0.1`.
- 28 In the **Model Builder** window, expand the **Study 2: Parameter Estimation > Solver Configurations > Solution 2 (sol2) > Optimization Solver I** node, then click **Time-Dependent Solver I**.
- 29 In the **Settings** window for **Time-Dependent Solver**, locate the **General** section.
- 30 From the **Times to store** list, choose **Steps taken by solver**.
- 31 In the **Model Builder** window, expand the **Study 2: Parameter Estimation > Solver Configurations > Solution 2 (sol2) > Optimization Solver I > Time-Dependent Solver I** node, then click **Advanced**.
- 32 In the **Settings** window for **Advanced**, locate the **General** section.

- 33 From the **Solver log** list, choose **Minimal**.
- 34 In the **Model Builder** window, under **Study 2: Parameter Estimation > Solver Configurations > Solution 2 (sol2) > Optimization Solver 1 > Time-Dependent Solver 1** click **Direct, pressure (dl) (Merged)**.
- 35 In the **Settings** window for **Direct**, locate the **General** section.
- 36 From the **Solver** list, choose **PARDISO**.

Follow these instructions to generate [Figure 4](#).

RESULTS

Experimental Data 1

In the **Model Builder** window, right-click **Experimental Data** and choose **Duplicate**.

Experimental Data 2

Right-click **Experimental Data** and choose **Duplicate**.

Optimized, Forward Model, and Experimental Data: T_surface and T_middle

- 1 In the **Settings** window for **ID Plot Group**, type **Optimized, Forward Model,** and **Experimental Data: T_surface** and **T_middle** in the **Label** text field.
- 2 In the **Model Builder** window, expand the **Optimized, Forward Model, and Experimental Data: T_surface and T_middle** node.

Center Temperature, Normalized Solid Mass

- 1 In the **Model Builder** window, under **Results > Optimized, Forward Model, and Experimental Data: T_surface and T_middle**, Ctrl-click to select **Normalized Solid Mass** and **Center Temperature**.
- 2 Right-click and choose **Delete**.

Surface Temp. (experimental)

In the **Settings** window for **Table Graph**, type **Surface Temp. (experimental)** in the **Label** text field.

Middle Temp. (experimental)

- 1 In the **Model Builder** window, under **Results > Optimized, Forward Model, and Experimental Data: T_surface and T_middle** click **Middle Temperature**.
- 2 In the **Settings** window for **Table Graph**, type **Middle Temp. (experimental)** in the **Label** text field.

Surface Temp. (forward model)

- 1 In the **Model Builder** window, right-click **Optimized, Forward Model, and Experimental Data: T_surface and T_middle** and choose **Point Graph**.
- 2 Select Point 4 only.
- 3 In the **Settings** window for **Point Graph**, type Surface Temp. (forward model) in the **Label** text field.
- 4 Locate the **Data** section. From the **Dataset** list, choose **Study 1: Forward Model (Initial-Value Based)/Solution 1 (sol1)**.
- 5 Select Point 4 only.
- 6 Locate the **y-Axis Data** section. In the **Expression** text field, type T.
- 7 Click to expand the **Coloring and Style** section. Find the **Line style** subsection. From the **Line** list, choose **Dashed**.
- 8 From the **Color** list, choose **Magenta**.
- 9 Click to expand the **Legends** section. Select the **Show legends** checkbox.
- 10 Find the **Include** subsection. Select the **Label** checkbox.
- 11 Clear the **Point** checkbox.
- 12 Clear the **Solution** checkbox.

Surface Temp. (optimized model)

- 1 Right-click **Surface Temp. (forward model)** and choose **Duplicate**.
- 2 In the **Settings** window for **Point Graph**, type Surface Temp. (optimized model) in the **Label** text field.
- 3 Locate the **Data** section. From the **Dataset** list, choose **Study 2: Parameter Estimation/Solution 2 (sol2)**.
- 4 Locate the **Coloring and Style** section. Find the **Line style** subsection. From the **Line** list, choose **Solid**.

Middle Temp. (forward model)

- 1 In the **Model Builder** window, right-click **Surface Temp. (forward model)** and choose **Duplicate**.
- 2 In the **Settings** window for **Point Graph**, type Middle Temp. (forward model) in the **Label** text field.
- 3 Locate the **Selection** section. Click to select the **Activate Selection** toggle button.
- 4 Select Point 3 only.
- 5 Locate the **Coloring and Style** section. From the **Color** list, choose **Black**.

Middle Temp. (optimized model)

- 1 Right-click **Middle Temp. (forward model)** and choose **Duplicate**.
- 2 In the **Settings** window for **Point Graph**, locate the **Data** section.
- 3 From the **Dataset** list, choose **Study 2: Parameter Estimation/Solution 2 (sol2)**.
- 4 In the **Label** text field, type **Middle Temp. (optimized model)**.
- 5 Locate the **Coloring and Style** section. Find the **Line style** subsection. From the **Line** list, choose **Solid**.

Optimized, Forward Model, and Experimental Data: T_surface and T_middle

- 1 In the **Model Builder** window, click **Optimized, Forward Model, and Experimental Data: T_surface and T_middle**.
- 2 In the **Settings** window for **ID Plot Group**, locate the **Plot Settings** section.
- 3 Clear the **Two y-axes** checkbox.
- 4 In the **y-axis label** text field, type **Temperature (K)**.
- 5 Locate the **Legend** section. From the **Layout** list, choose **Inside graph axis area**.
- 6 From the **Position** list, choose **Lower right**.
- 7 In the **Number of columns** text field, type **2**.
- 8 In the **Maximum relative width** text field, type **1**.

Middle Temp. (experimental)

- 1 In the **Model Builder** window, click **Middle Temp. (experimental)**.
- 2 Drag and drop below **Surface Temp. (optimized model)**.

Experimental Data 2

In the **Model Builder** window, expand the **Results > Experimental Data 2** node.

Middle Temperature, Surface Temperature

- 1 In the **Model Builder** window, under **Results > Experimental Data 2**, Ctrl-click to select **Surface Temperature** and **Middle Temperature**.
- 2 Right-click and choose **Delete**.

Optimized, Forward Model, and Experimental Data: Y and T_center

- 1 In the **Model Builder** window, under **Results** click **Experimental Data 2**.
- 2 In the **Settings** window for **ID Plot Group**, type **Optimized, Forward Model, and Experimental Data: Y and T_center** in the **Label** text field.
- 3 Locate the **Legend** section. From the **Layout** list, choose **Outside graph axis area**.
- 4 From the **Position** list, choose **Bottom**.

5 In the **Number of rows** text field, type 2.

Normalized Mass (experimental)

- 1 In the **Model Builder** window, under **Results > Optimized, Forward Model, and Experimental Data: Y and T_center** click **Normalized Solid Mass**.
- 2 In the **Settings** window for **Table Graph**, type **Normalized Mass (experimental)** in the **Label** text field.

Center Temp. (experimental)

- 1 In the **Model Builder** window, under **Results > Optimized, Forward Model, and Experimental Data: Y and T_center** click **Center Temperature**.
- 2 In the **Settings** window for **Table Graph**, type **Center Temp. (experimental)** in the **Label** text field.

Optimized, Forward Model, and Experimental Data: Y and T_center

Right-click **Results > Optimized, Forward Model, and Experimental Data: Y and T_center > Center Temp. (experimental)** and choose **Global**.

Normalized Mass (forward model)

- 1 In the **Settings** window for **Global**, type **Normalized Mass (forward model)** in the **Label** text field.
- 2 Locate the **Data** section. From the **Dataset** list, choose **Study 1: Forward Model (Initial-Value Based)/Solution 1 (sol1)**.
- 3 Click **Replace Expression** in the upper-right corner of the **y-Axis Data** section. From the menu, choose **Component 1 (comp1) > Definitions > domY - Domain Probe Y - I**.
- 4 Click to expand the **Coloring and Style** section. Find the **Line style** subsection. From the **Line** list, choose **Dashed**.
- 5 From the **Color** list, choose **Red**.
- 6 Click to expand the **Legends** section. Find the **Include** subsection. Select the **Label** checkbox.
- 7 Clear the **Solution** checkbox.
- 8 Clear the **Description** checkbox.

Normalized Mass (optimized model)


- 1 Right-click **Normalized Mass (forward model)** and choose **Duplicate**.
- 2 In the **Settings** window for **Global**, type **Normalized Mass (optimized model)** in the **Label** text field.

- 3 Locate the **Data** section. From the **Dataset** list, choose **Study 2: Parameter Estimation/Solution 2 (sol2)**.
- 4 Locate the **Coloring and Style** section. Find the **Line style** subsection. From the **Line** list, choose **Solid**.

Center Temp. (forward model)

- 1 In the **Model Builder** window, right-click **Optimized, Forward Model, and Experimental Data: Y and T_center** and choose **Point Graph**.
- 2 In the **Settings** window for **Point Graph**, type *Center Temp. (forward model)* in the **Label** text field.
- 3 Locate the **Data** section. From the **Dataset** list, choose **Study 1: Forward Model (Initial-Value Based)/Solution 1 (sol1)**.
- 4 Locate the **y-Axis Data** section. In the **Expression** text field, type *T*.
- 5 Locate the **y-Axis** section. Select the **Plot on secondary y-axis** checkbox.
- 6 Locate the **Coloring and Style** section. Find the **Line style** subsection. From the **Line** list, choose **Dashed**.
- 7 From the **Color** list, choose **Blue**.
- 8 Locate the **Legends** section. Select the **Show legends** checkbox.
- 9 Find the **Include** subsection. Select the **Label** checkbox.
- 10 Clear the **Point** checkbox.
- 11 Clear the **Solution** checkbox.
- 12 Select Point 3 only.

Center Temp. (optimized model)

- 1 Right-click **Center Temp. (forward model)** and choose **Duplicate**.
- 2 In the **Settings** window for **Point Graph**, type *Center Temp. (optimized model)* in the **Label** text field.
- 3 Locate the **Data** section. From the **Dataset** list, choose **Study 2: Parameter Estimation/Solution 2 (sol2)**.
- 4 Locate the **Coloring and Style** section. Find the **Line style** subsection. From the **Line** list, choose **Solid**.
- 5 In the **Optimized, Forward Model, and Experimental Data: Y and T_center** toolbar, click  **Plot**.

Turn on manual time stepping to avoid that interpolation errors affect the objective function. Using manual time stepping will increase the computational time significantly.

With automatic time stepping the computational error may vary between iterations, affecting the value of the objective function, and thus the final results. If the time list is instead fixed, as with manual time stepping, the interpolation error does not change between iterations, and the objective function is evaluated without this variation. This means that the optimized values will deviate less between runs. When using a manual time step the relative and absolute tolerances are not used. A step convergence study should thus be performed. Such a study consists of re-computing the model with different manual time steps until the results from the different runs do not vary significantly. For this model, a time step of 1 s will give accurate results.

During optimization, a table will be available to inspect the values for the control parameters and objective function for each model evaluation.


STUDY 2: PARAMETER ESTIMATION

General Optimization

- 1 In the **Model Builder** window, under **Study 2: Parameter Estimation** click **General Optimization**.
- 2 In the **Settings** window for **General Optimization**, locate the **Output** section.
- 3 Select the **Plot** checkbox.
- 4 In the table, enter the following settings:



Plot group	Plot window
Optimized, Forward Model, and Experimental Data: Y and T_center	Graphics

Solve the optimization problem.

- 5 In the **Study** toolbar, click  **Compute**.



RESULTS

Optimized, Forward Model, and Experimental Data: T_surface and T_middle

- 1 In the **Model Builder** window, under **Results** click **Optimized, Forward Model, and Experimental Data: T_surface and T_middle**.
- 2 In the **Optimized, Forward Model, and Experimental Data: T_surface and T_middle** toolbar, click  **Plot**.
- 3 Click the  **Zoom Extents** button in the **Graphics** toolbar.


Optimized, Forward Model, and Experimental Data: Y and T_center

- 1 In the **Model Builder** window, click **Optimized, Forward Model, and Experimental Data: Y and T_center**.


- 2 In the **Optimized, Forward Model, and Experimental Data: Y and T_center** toolbar, click  **Plot**.
- 3 Click the  **Zoom Extents** button in the **Graphics** toolbar.

The optimization has finished. The optimized values for the physical parameters can be derived using a **Global Evaluation** feature.


Optimized parameter values

- 1 In the **Results** toolbar, click  **Evaluation Group**.
- 2 In the **Settings** window for **Evaluation Group**, type **Optimized parameter values** in the **Label** text field.
- 3 Locate the **Data** section. From the **Dataset** list, choose **Study 2: Parameter Estimation/ Solution 2 (sol2)**.
- 4 From the **Time selection** list, choose **Last**.

Global Evaluation 1

- 1 Right-click **Optimized parameter values** and choose **Global Evaluation**.
- 2 In the **Settings** window for **Global Evaluation**, click **Add Expression** in the upper-right corner of the **Expressions** section. From the menu, choose **Global definitions > Parameters > A_is - Frequency factor w -> is (intermediate solid) - 1/s**.
- 3 Click **Add Expression** in the upper-right corner of the **Expressions** section. From the menu, choose **Global definitions > Parameters > DH_c - Heat of reaction intermediate solid -> char - J/kg**.
- 4 Click **Add Expression** in the upper-right corner of the **Expressions** section. From the menu, choose **Global definitions > Parameters > DH_t - Heat of reaction wood -> tar - J/kg**.
- 5 Click **Add Expression** in the upper-right corner of the **Expressions** section. From the menu, choose **Global definitions > Parameters > hconv - External convective heat transfer coefficient - W/(m²·K)**.
- 6 In the **Optimized parameter values** toolbar, click  **Evaluate**.


Objectives

- 1 In the **Results** toolbar, click  **Evaluation Group**.
- 2 In the **Settings** window for **Evaluation Group**, type **Objectives** in the **Label** text field.
- 3 Locate the **Data** section. From the **Dataset** list, choose **Study 2: Parameter Estimation/ Solution 2 (sol2)**.

Global Evaluation 1

- 1 Right-click **Objectives** and choose **Global Evaluation**.
- 2 In the **Settings** window for **Global Evaluation**, locate the **Expressions** section.
- 3 In the table, enter the following settings:

Expression	Unit
obj1	1
obj2	1
obj3	1
obj4	1

- 4 Locate the **Data Series Operation** section. From the **Transformation** list, choose **Integral**.
- 5 In the **Objectives** toolbar, click  **Evaluate**.

OBJECTIVES


Go to the **Objectives** window.

One can see that the objective related to the normalized solid mass is the largest, which explains why this property matches the data particularly well. A lower value for **Delta** can be used to change this balance.

RESULTS


Set up a 3D plot to illustrate how the amounts of the three solid species change during the pyrolysis process. When done, we will have set up [Figure 6](#) in the model documentation.

Solid Species

- 1 In the **Results** toolbar, click  **3D Plot Group**.
- 2 In the **Settings** window for **3D Plot Group**, type **Solid Species** in the **Label** text field.
- 3 Locate the **Color Legend** section. From the **Position** list, choose **Right double**.
- 4 Click to expand the **Plot Array** section. Select the **Enable** checkbox.
- 5 From the **Array shape** list, choose **Square**.
- 6 From the **Array plane** list, choose **xz**.

Mirror 2D 1

Prepare a dataset that illustrates a half sphere.

- 1 In the **Results** toolbar, click  **More Datasets** and choose **Mirror 2D**.
- 2 In the **Settings** window for **Mirror 2D**, locate the **Axis Data** section.
- 3 In row **Point 2**, set **R** to 1.

4 In row **Point 2**, set **Z** to 0.

5 Click  **Plot**.

Half Sphere

1 In the **Results** toolbar, click  **More Datasets** and choose **Revolution 2D**.

2 In the **Settings** window for **Revolution 2D**, type **Half Sphere** in the **Label** text field.

3 Locate the **Data** section. From the **Dataset** list, choose **Mirror 2D I**.

4 Click to expand the **Revolution Layers** section. In the **Revolution angle** text field, type 180.

5 Click  **Plot**.

150s Wood

1 In the **Model Builder** window, right-click **Solid Species** and choose **Surface**.

2 In the **Settings** window for **Surface**, type **150s Wood** in the **Label** text field.

3 Locate the **Data** section. From the **Dataset** list, choose **Half Sphere**.

4 From the **Time (s)** list, choose **Interpolation**.

5 In the **Time** text field, type 150.

6 Locate the **Expression** section. In the **Expression** text field, type ρ_w/ρ_w_{init} .

There are many color tables to choose from. There is also the possibility to create your own. Follow these steps to create three new color tables that will simplify the interpretation of the plot.

7 Click the  **Show More Options** button in the **Model Builder** toolbar.

8 In the **Show More Options** dialog, select **Results > Color Tables** in the tree.

9 In the tree, select the checkbox for the node **Results > Color Tables**.

10 Click **OK**.

Wood

1 In the **Model Builder** window, under **Results** right-click **Color Tables** and choose **Color Table**.

2 In the **Settings** window for **Color Table**, type **Wood** in the **Label** text field.

3 Locate the **Definition** section. In the table, enter the following settings:

Red	Green	Blue	Length
1	0.72	0.075	20
1	1	1	1

Red	Green	Blue	Length
1	1	1	5
0.9	0.9	0.9	0.1

Intermediate

- 1 Right-click **Color Tables** and choose **Color Table**.
- 2 In the **Settings** window for **Color Table**, type Intermediate in the **Label** text field.
- 3 Locate the **Definition** section. In the table, enter the following settings:

Red	Green	Blue	Length
0.77	0.22	0.20	20
1	1	1	1
1	1	1	5
0.9	0.9	0.9	0.1

Char

- 1 Right-click **Color Tables** and choose **Color Table**.
- 2 In the **Settings** window for **Color Table**, type Char in the **Label** text field.
- 3 Locate the **Definition** section. In the table, enter the following settings:

Red	Green	Blue	Length
0.3	0.13	0.06	20
1	1	1	1
1	1	1	5
0.9	0.9	0.9	0.1

150s Wood

- 1 In the **Model Builder** window, under **Results > Solid Species** click **150s Wood**.
- 2 In the **Settings** window for **Surface**, locate the **Coloring and Style** section.
- 3 From the **Color table** list, choose **Wood**.
- 4 From the **Color table transformation** list, choose **Reverse**.
- 5 From the **Color table type** list, choose **Discrete**.

150s Intermediate Solid

- 1 Right-click **150s Wood** and choose **Duplicate**.
- 2 In the **Settings** window for **Surface**, type 150s Intermediate Solid in the **Label** text field.

- 3 Locate the **Expression** section. In the **Expression** text field, type rho_is/rho_w_init.
- 4 Locate the **Coloring and Style** section. From the **Color table** list, choose **Intermediate**.

150s Char

- 1 Right-click **150s Intermediate Solid** and choose **Duplicate**.
- 2 In the **Settings** window for **Surface**, type 150s Char in the **Label** text field.
- 3 Locate the **Expression** section. In the **Expression** text field, type rho_c/rho_w_init.
- 4 Locate the **Coloring and Style** section. From the **Color table** list, choose **Char**.
- 5 Click to expand the **Plot Array** section. Select the **Manual indexing** checkbox.
- 6 In the **Column index** text field, type 2.

270s Wood

- 1 In the **Model Builder** window, right-click **150s Wood** and choose **Duplicate**.
- 2 In the **Settings** window for **Surface**, type 270s Wood in the **Label** text field.
- 3 Locate the **Data** section. In the **Time** text field, type 270.
- 4 Click to expand the **Inherit Style** section. From the **Plot** list, choose **150s Wood**.
- 5 Locate the **Plot Array** section. Select the **Manual indexing** checkbox.
- 6 In the **Row index** text field, type 1.

270s Intermediate Solid

- 1 In the **Model Builder** window, right-click **150s Intermediate Solid** and choose **Duplicate**.
- 2 In the **Settings** window for **Surface**, type 270s Intermediate Solid in the **Label** text field.
- 3 Locate the **Data** section. In the **Time** text field, type 270.
- 4 Locate the **Inherit Style** section. From the **Plot** list, choose **150s Intermediate Solid**.
- 5 Locate the **Plot Array** section. Select the **Manual indexing** checkbox.
- 6 In the **Row index** text field, type 1.
- 7 In the **Column index** text field, type 1.

270s Char

- 1 In the **Model Builder** window, right-click **150s Char** and choose **Duplicate**.
- 2 In the **Settings** window for **Surface**, type 270s Char in the **Label** text field.
- 3 Locate the **Data** section. In the **Time** text field, type 270.
- 4 Locate the **Inherit Style** section. From the **Plot** list, choose **150s Char**.
- 5 Locate the **Plot Array** section. In the **Row index** text field, type 1.

410 s Wood

- 1 In the **Model Builder** window, right-click **270s Wood** and choose **Duplicate**.
- 2 In the **Settings** window for **Surface**, type 410 s Wood in the **Label** text field.
- 3 Locate the **Data** section. In the **Time** text field, type 410.
- 4 Locate the **Plot Array** section. In the **Row index** text field, type 2.

410 s Intermediate Solid

- 1 In the **Model Builder** window, right-click **270s Intermediate Solid** and choose **Duplicate**.
- 2 In the **Settings** window for **Surface**, type 410 s Intermediate Solid in the **Label** text field.
- 3 Locate the **Data** section. In the **Time** text field, type 410.
- 4 Locate the **Plot Array** section. In the **Row index** text field, type 2.

410 s Char

- 1 In the **Model Builder** window, right-click **270s Char** and choose **Duplicate**.
- 2 In the **Settings** window for **Surface**, type 410 s Char in the **Label** text field.
- 3 Locate the **Data** section. In the **Time** text field, type 410.
- 4 Locate the **Plot Array** section. In the **Row index** text field, type 2.

Solid Species

- 1 In the **Model Builder** window, click **Solid Species**.
- 2 In the **Settings** window for **3D Plot Group**, click to expand the **Title** section.
- 3 From the **Title type** list, choose **None**.

Wood

- 1 Right-click **Solid Species** and choose **Annotation**.
- 2 In the **Settings** window for **Annotation**, type Wood in the **Label** text field.
- 3 Locate the **Data** section. From the **Dataset** list, choose **Half Sphere**.
- 4 Locate the **Annotation** section. In the **Text** text field, type $\frac{\rho_{\omega}}{\rho_{\omega,0}}\$$.
- 5 Select the **LaTeX markup** checkbox.
- 6 Locate the **Position** section. In the **z** text field, type -0.02.
- 7 Locate the **Coloring and Style** section. Clear the **Show point** checkbox.
- 8 From the **Anchor point** list, choose **Center**.
- 9 Click to expand the **Plot Array** section. Select the **Manual indexing** checkbox.

Intermediate Solid

- 1 Right-click **Wood** and choose **Duplicate**.
- 2 In the **Settings** window for **Annotation**, type *Intermediate Solid* in the **Label** text field.
- 3 Locate the **Annotation** section. In the **Text** text field, type $\frac{\rho_{is}}{\rho_{\omega,0}}\$$.
- 4 Locate the **Plot Array** section. In the **Column index** text field, type 1.

Char

- 1 Right-click **Intermediate Solid** and choose **Duplicate**.
- 2 In the **Settings** window for **Annotation**, type *Char* in the **Label** text field.
- 3 Locate the **Annotation** section. In the **Text** text field, type $\frac{\rho_c}{\rho_{\omega,0}}\$$.
- 4 Locate the **Plot Array** section. In the **Column index** text field, type 2.

150 s

- 1 In the **Model Builder** window, right-click **Wood** and choose **Duplicate**.
- 2 In the **Settings** window for **Annotation**, type 150 s in the **Label** text field.
- 3 Locate the **Annotation** section. In the **Text** text field, type 150 s.
- 4 Locate the **Position** section. In the **z** text field, type 0.
- 5 In the **x** text field, type -0.025.

270 s



- 1 Right-click **150 s** and choose **Duplicate**.
- 2 In the **Settings** window for **Annotation**, type 270 s in the **Label** text field.
- 3 Locate the **Annotation** section. In the **Text** text field, type 270 s.
- 4 Locate the **Plot Array** section. In the **Row index** text field, type 1.

410 s

- 1 Right-click **270 s** and choose **Duplicate**.
- 2 In the **Settings** window for **Annotation**, type 410 s in the **Label** text field.
- 3 Locate the **Annotation** section. In the **Text** text field, type 410 s.
- 4 Locate the **Plot Array** section. In the **Row index** text field, type 2.


Solid Species

- 1 In the **Model Builder** window, click **Solid Species**.
- 2 In the **Settings** window for **3D Plot Group**, locate the **Plot Settings** section.

- 3 From the **View** list, choose **View 3D 2**.
- 4 Click the  **Zoom Extents** button in the **Graphics** toolbar.
- 5 In the **Solid Species** toolbar, click  **Plot**.

T, Q_{mass} and Q at 150 s

Having illustrated the progress of the solid reactions, look at the temperature, mass source, and heat source. Follow the steps below to set up [Figure 7–Figure 9](#) in the model documentation.

- 1 In the **Results** toolbar, click  **2D Plot Group**.
- 2 In the **Settings** window for **2D Plot Group**, type T, Q_{mass} and Q at 150 s in the **Label** text field.
- 3 Locate the **Data** section. From the **Dataset** list, choose **Probe Solution 3 (sol1)**.
- 4 From the **Time (s)** list, choose **Interpolation**.
- 5 In the **Time** text field, type 150.
- 6 Click to expand the **Title** section. From the **Title type** list, choose **None**.
- 7 Locate the **Color Legend** section. Select the **Show units** checkbox.
- 8 From the **Position** list, choose **Right double**.
- 9 Click to expand the **Plot Array** section. Select the **Enable** checkbox.
- 10 From the **Array shape** list, choose **Square**.
- 11 From the **Order** list, choose **Column-major**.

Temperature

- 1 Right-click **T, Q_{mass} and Q at 150 s** and choose **Annotation**.
- 2 In the **Settings** window for **Annotation**, type Temperature in the **Label** text field.
- 3 Locate the **Annotation** section. In the **Text** text field, type $\$T\$$.
- 4 Select the **LaTeX markup** checkbox.
- 5 Locate the **Coloring and Style** section. Clear the **Show point** checkbox.
- 6 From the **Anchor point** list, choose **Center**.
- 7 Click to expand the **Plot Array** section. Select the **Manual indexing** checkbox.
- 8 Locate the **Position** section. In the **R** text field, type 0.005.
- 9 In the **Z** text field, type 0.0135.

Mass Source

- 1 Right-click **Temperature** and choose **Duplicate**.

- 2 In the **Settings** window for **Annotation**, type Mass Source in the **Label** text field.
- 3 Locate the **Annotation** section. In the **Text** text field, type $\$Q_{\{mass\}}\$$.
- 4 Locate the **Plot Array** section. In the **Row index** text field, type 1.

Heat Source

- 1 Right-click **Mass Source** and choose **Duplicate**.
- 2 In the **Settings** window for **Annotation**, type Heat Source in the **Label** text field.
- 3 Locate the **Annotation** section. In the **Text** text field, type $\$Q\$$.
- 4 Locate the **Plot Array** section. In the **Row index** text field, type 2.

T

- 1 In the **Model Builder** window, right-click **T, Qmass and Q at 150 s** and choose **Surface**.
- 2 In the **Settings** window for **Surface**, type T in the **Label** text field.
- 3 Locate the **Expression** section. In the **Expression** text field, type T.
- 4 Locate the **Coloring and Style** section. From the **Color table** list, choose **HeatCameraLight**.
- 5 Click to expand the **Plot Array** section. Select the **Manual indexing** checkbox.



dl.Qm


- 1 Right-click **T** and choose **Duplicate**.
- 2 In the **Settings** window for **Surface**, type dl.Qm in the **Label** text field.
- 3 Locate the **Expression** section. In the **Expression** text field, type dl.Qm.
- 4 Locate the **Coloring and Style** section. From the **Color table** list, choose **Crocus**.
- 5 From the **Scale** list, choose **Linear symmetric**.
- 6 Locate the **Plot Array** section. In the **Row index** text field, type 1.

Q

- 1 Right-click **dl.Qm** and choose **Duplicate**.
- 2 In the **Settings** window for **Surface**, type Q in the **Label** text field.
- 3 Locate the **Expression** section. In the **Expression** text field, type Q.
- 4 Locate the **Coloring and Style** section. From the **Color table** list, choose **Avicularia**.
- 5 Locate the **Plot Array** section. In the **Row index** text field, type 2.

T, Qmass and Q at 150 s

- 1 Click the  **Show Grid** button in the **Graphics** toolbar.
- 2 In the **Model Builder** window, click **T, Qmass and Q at 150 s**.
- 3 In the **T, Qmass and Q at 150 s** toolbar, click  **Plot**.

4 Click the  **Zoom Extents** button in the **Graphics** toolbar.


5 In the **T, Qmass and Q at 150 s** toolbar, click  **Plot**.


T, Qmass and Q at 270 s


1 Right-click **T, Qmass and Q at 150 s** and choose **Duplicate**.

2 In the **Settings** window for **2D Plot Group**, type **T, Qmass and Q at 270 s** in the **Label** text field.

3 Locate the **Data** section. In the **Time** text field, type 270.

4 In the **T, Qmass and Q at 270 s** toolbar, click  **Plot**.

5 Click the  **Zoom Extents** button in the **Graphics** toolbar.


6 In the **T, Qmass and Q at 270 s** toolbar, click  **Plot**.


T, Qmass and Q at 433 s

1 Right-click **T, Qmass and Q at 270 s** and choose **Duplicate**.

2 In the **Settings** window for **2D Plot Group**, type **T, Qmass and Q at 433 s** in the **Label** text field.


3 Locate the **Data** section. In the **Time** text field, type 433.

4 Click the  **Zoom Extents** button in the **Graphics** toolbar.

5 In the **T, Qmass and Q at 433 s** toolbar, click  **Plot**.

Pressure, velocity, porosity, and normalized solid mass at 270 s

Now plot the relative pressure, the total Darcy velocity magnitude, porosity, normalized solid mass, and the total Darcy velocity field. This gives [Figure 10](#) in the model documentation.

1 In the **Results** toolbar, click  **2D Plot Group**.

2 In the **Settings** window for **2D Plot Group**, type **Pressure, velocity, porosity, and normalized solid mass at 270 s** in the **Label** text field.

3 Locate the **Data** section. From the **Dataset** list, choose **Probe Solution 3 (sol1)**.

4 From the **Time (s)** list, choose **Interpolation**.

5 In the **Time** text field, type 270.

6 Locate the **Title** section. From the **Title type** list, choose **None**.

7 Locate the **Color Legend** section. Select the **Show units** checkbox.

8 From the **Position** list, choose **Right double**.

9 Locate the **Plot Array** section. Select the **Enable** checkbox.

10 From the **Array shape** list, choose **Square**.

Relative Pressure

- 1 Right-click **Pressure, velocity, porosity, and normalized solid mass at 270 s** and choose **Annotation**.
- 2 In the **Settings** window for **Annotation**, type *Relative Pressure* in the **Label** text field.
- 3 Locate the **Annotation** section. In the **Text** text field, type $\$p/p_{ref}\$$.
- 4 Select the **LaTeX markup** checkbox.
- 5 Locate the **Position** section. In the **R** text field, type 0.005.
- 6 In the **Z** text field, type 0.0135.
- 7 Locate the **Coloring and Style** section. Clear the **Show point** checkbox.
- 8 From the **Anchor point** list, choose **Center**.
- 9 Locate the **Plot Array** section. Select the **Manual indexing** checkbox.

Total Darcy Velocity Magnitude

- 1 Right-click **Relative Pressure** and choose **Duplicate**.
- 2 In the **Settings** window for **Annotation**, type *Total Darcy Velocity Magnitude* in the **Label** text field.
- 3 Locate the **Annotation** section. In the **Text** text field, type $\$U\$$.
- 4 Locate the **Plot Array** section. In the **Column index** text field, type 1.

Porosity

- 1 Right-click **Total Darcy Velocity Magnitude** and choose **Duplicate**.
- 2 In the **Settings** window for **Annotation**, type *Porosity* in the **Label** text field.
- 3 Locate the **Annotation** section. In the **Text** text field, type $\$\epsilon\$\$$.
- 4 Locate the **Plot Array** section. In the **Row index** text field, type 1.
- 5 In the **Column index** text field, type 0.

Normalized Solid Mass

- 1 Right-click **Porosity** and choose **Duplicate**.
- 2 In the **Settings** window for **Annotation**, type *Normalized Solid Mass* in the **Label** text field.
- 3 Locate the **Annotation** section. In the **Text** text field, type $\$Y\$$.
- 4 Locate the **Plot Array** section. In the **Column index** text field, type 1.

dl.pA/dl.pref

- 1 In the **Model Builder** window, right-click **Pressure, velocity, porosity, and normalized solid mass at 270 s** and choose **Surface**.

- 2 In the **Settings** window for **Surface**, type `d1.pA/d1.pref` in the **Label** text field.
- 3 Locate the **Expression** section. In the **Expression** text field, type `d1.pA/d1.pref`.
- 4 Locate the **Coloring and Style** section. From the **Color table** list, choose **Iodinea**.
- 5 Locate the **Plot Array** section. Select the **Manual indexing** checkbox.

d1.U

- 1 Right-click **dl.pA/dl.pref** and choose **Duplicate**.
- 2 In the **Settings** window for **Surface**, type `d1.U` in the **Label** text field.
- 3 Locate the **Expression** section. In the **Expression** text field, type `d1.U`.
- 4 Locate the **Coloring and Style** section. From the **Color table** list, choose **Acanthaster**.
- 5 Locate the **Plot Array** section. In the **Column index** text field, type 1.

d1.u

- 1 In the **Model Builder** window, right-click **Pressure, velocity, porosity, and normalized solid mass at 270 s** and choose **Arrow Surface**.
- 2 In the **Settings** window for **Arrow Surface**, type `d1.u` in the **Label** text field.
- 3 Locate the **Expression** section. In the **R-component** text field, type `d1.u`.
- 4 In the **Z-component** text field, type `d1.w`.
- 5 Locate the **Arrow Positioning** section. Find the **R grid points** subsection. In the **Points** text field, type 10.
- 6 Find the **Z grid points** subsection. In the **Points** text field, type 10.
- 7 Locate the **Coloring and Style** section. From the **Arrow type** list, choose **Cone**.
- 8 From the **Arrow length** list, choose **Normalized**.
- 9 From the **Arrow base** list, choose **Center**.
- 10 Select the **Scale factor** checkbox. In the associated text field, type 0.14.
- 11 From the **Color** list, choose **Black**.
- 12 Click to expand the **Plot Array** section. Select the **Manual indexing** checkbox.
- 13 In the **Column index** text field, type 1.

epsilon



- 1 In the **Model Builder** window, right-click **dl.pA/dl.pref** and choose **Duplicate**.
- 2 In the **Settings** window for **Surface**, type `epsilon` in the **Label** text field.
- 3 Locate the **Expression** section. In the **Expression** text field, type `epsilon`.
- 4 Locate the **Coloring and Style** section. From the **Color table** list, choose **Metasepia**.

- 5 From the **Color table transformation** list, choose **Reverse**.
- 6 Locate the **Plot Array** section. In the **Row index** text field, type 1.

Y

- 1 Right-click **epsilon** and choose **Duplicate**.
- 2 In the **Settings** window for **Surface**, type Y in the **Label** text field.
- 3 Locate the **Expression** section. In the **Expression** text field, type Y.
- 4 Locate the **Coloring and Style** section. From the **Color table** list, choose **Cynanthus**.
- 5 From the **Color table transformation** list, choose **None**.
- 6 Locate the **Plot Array** section. In the **Column index** text field, type 1.

Pressure, velocity, porosity, and normalized solid mass at 270 s

- 1 Click the  **Zoom Extents** button in the **Graphics** toolbar.
- 2 In the **Model Builder** window, click **Pressure, velocity, porosity, and normalized solid mass at 270 s**.
- 3 In the **Pressure, velocity, porosity, and normalized solid mass at 270 s** toolbar, click  **Plot**.