

Two-Phase Flow in Column

Introduction

The following example analyzes two-phase flow in porous media. Describing how immiscible fluids move through porous media is key to answering many environmental and industrial questions. Unfortunately, multiphase analyses are complicated by the need to solve for multiple dependent variables along with a variety of unknowns. Among them are hydraulic properties that depend on the pressure and saturation levels of each fluid phase.

This problem demonstrates two-phase flow following a U.S. Environmental Protection Agency experimental setup (Ref. 1). This straightforward experiment matches observations for a laboratory column to numerical estimates of two-phase flow. With these column experiments, the researchers evaluated flow for varying fluid pairs (air-water, air-oil, and oil-water) and then match the experimental results to those from computer simulations that employ analytic expressions for retention and permeability. This discussion addresses their work for the Lincoln soil and use formulas from Mualem (Ref. 2) and van Genuchten (Ref. 3) to give hydraulic properties.

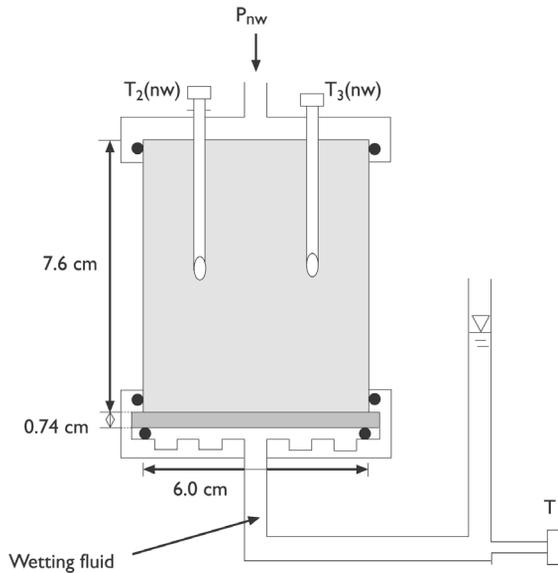


Figure 1: Geometry of the two-phase flow column experiments in Hopmans and others (Ref. 1).

This is a multipart example. The first part sets up the two-phase flow model for water and air; the equations solve for pressures. Saturation varies with the solution. An underlying

assumption is that at least some residual air and water exist throughout the soil column at all times. The model tracks the gas front as it displaces a wetting fluid by observing saturation rather than assuming a discrete interface. The second part modifies the air-water simulation for air-oil and oil-water mixtures.

Model Definition

In the experimental setup for air and water, air enters from the top surface of a column made of water and sand. The incoming air (the nonwetting phase) forces the water (the wetting phase) toward the outlet at the base of the column. At the inlet, air pressure increases by steps in time, and no water exits through the column top. In moving to the outlet, the water passes through a disc that is impermeable to airflow. Neither the air nor the water can pass through the vertical column walls. The water pressure at the outlet, which changes in time, corresponds to the height of fluid rise in a receiving buret. The column has a total height of 8.34 cm, a 6-cm radius, and the disk is 0.74 cm thick. The experiment covers 170 hours.

GOVERNING EQUATIONS AND BOUNDARY CONDITIONS

Two-phase flow in porous media follows separate equations for the wetting (w) and nonwetting (nw) fluids:

$$(\theta_s - \theta_r) \frac{\partial \text{Se}_w}{\partial t} + \nabla \cdot \left[-\frac{\kappa_{\text{int}} k_{r,w}}{\mu_w} \nabla (p_w + \rho_w g \nabla D) \right] = 0 \quad (1)$$

$$(\theta_s - \theta_r) \frac{\partial \text{Se}_{\text{nw}}}{\partial t} + \nabla \cdot \left[-\frac{\kappa_{\text{int}} k_{r,\text{nw}}}{\mu_{\text{nw}}} \nabla (p_{\text{nw}} + \rho_{\text{nw}} g \nabla D) \right] = 0 \quad (2)$$

where θ_s is the total porosity or saturated volume fraction; θ_r is the residual volume fraction, so the difference $\theta_s - \theta_r$ is the available pore space for phases to move; Se is the effective saturation; t is time; κ_{int} is the intrinsic permeability of the porous medium (m^2); k_r is the relative permeability (a function of saturation for a given fluid); μ is the fluid's dynamic viscosity (Pa-s); p is pressure (Pa); ρ is the fluid density (kg/m^3); g is acceleration of gravity; and D is the coordinate (for example, x, y , or z) of vertical elevation (m).

When considering a continuous fluid field, neither phase ever completely fills the pore space, giving a volume fraction for the wetting phase, θ_w , and nonwetting phase, θ_{nw} . For the wetting phase, θ varies from zero or a small residual value θ_r to the total porosity, θ_s . The effective saturation, Se , comes from scaling θ with respect to θ_s and θ_r and so varies from 0 to 1. Both θ and Se are functions of the pressures of both fluids in the system.

The capillary pressure p_c is commonly defined as the difference between the pressure of the nonwetting and wetting phases

$$p_c = p_{nw} - p_w \quad (3)$$

The available pore space can be completely filled with one fluid at a given time, which relates the effective saturations for each phase

$$S_{e_w} + S_{e_{nw}} = 1 \quad (4)$$

The specific capacity of the wetting phase $C_{p,w}$ depends on changes in the effective saturation with respect to the capillary pressure as

$$C_{p,w} = (\theta_r - \theta_s) \frac{\partial S_{e_w}}{\partial p_c} \quad (5)$$

in the same way, the specific capacity of the nonwetting phase $C_{p,nw}$ is defined with the help of Equation 4 as

$$C_{p,nw} = (\theta_s - \theta_r) \frac{\partial S_{e_{nw}}}{\partial p_c} = (\theta_s - \theta_r) \frac{\partial(1 - S_{e_w})}{\partial p_c} = -C_{p,w}$$

Since the specific capacity of the two phases is the same but with opposite sign, it is just denoted as C_p .

Using Equation 3, Equation 4, and Equation 5 in Equation 1 and Equation 2 simplifies the numerical model. The governing equations become:

$$-C_{p,w} \frac{\partial}{\partial t} (p_{nw} - p_w) + \nabla \cdot \left[-\frac{\kappa_{int} k_{r,w}}{\mu_w} (\nabla p_w + \rho_w g \nabla D) \right] = 0$$

$$C_{p,w} \frac{\partial}{\partial t} (p_{nw} - p_w) + \nabla \cdot \left[-\frac{\kappa_{int} k_{r,nw}}{\mu_{nw}} (\nabla p_{nw} + \rho_{nw} g \nabla D) \right] = 0$$

You can solve this system of equations simultaneously for p_w and p_{nw} . In this example, the two fluids are incompressible, but that need not be the case. Rearranging terms, and adding the density of each fluid, we obtain two coupled Darcy's law equations, one for the wetting phase, and another for the nonwetting phase

$$\rho_w C_p \frac{\partial}{\partial t} p_w + \nabla \cdot \left[-\frac{\kappa_{int} k_{r,w}}{\mu_w} (\nabla p_w + \rho_w g \nabla D) \right] = \rho_w C_p \frac{\partial}{\partial t} p_{nw}$$

$$\rho_{nw} C_p \frac{\partial}{\partial t} p_{nw} + \nabla \cdot \rho_{nw} \left[-\frac{\kappa_{int} k_{r,nw}}{\mu_{nw}} (\nabla p_{nw} + \rho_{nw} g \nabla D) \right] = \rho_{nw} C_p \frac{\partial}{\partial t} p_w$$

Initially, the water and air in the column follow hydrostatic distributions. The boundary conditions allow the water to exit only from the base of the soil column. For the wetting phase, the boundary conditions are

$$\begin{aligned} \mathbf{n} \cdot \rho_w \left[-\frac{\kappa}{\mu} (\nabla p_w + \rho_w g \nabla D) \right] &= 0 & \partial\Omega \text{ Inlet} \\ \mathbf{n} \cdot \rho_w \left[-\frac{\kappa}{\mu} (\nabla p_w + \rho_w g \nabla D) \right] &= 0 & \partial\Omega \text{ Sides} \\ p_w &= p_{w0}(t) & \partial\Omega \text{ Base} \end{aligned}$$

where \mathbf{n} is the unit vector normal to the boundary.

Because air enters at the column top but never exits, the boundary conditions for the nonwetting phase are

$$\begin{aligned} \mathbf{n} \cdot \rho_{nw} \left[-\frac{\kappa}{\mu} (\nabla p_{nw} + \rho_{nw} g \nabla D) \right] &= 0 & \partial\Omega \text{ Surface} \\ \mathbf{n} \cdot \rho_{nw} \left[-\frac{\kappa}{\mu} (\nabla p_{nw} + \rho_{nw} g \nabla D) \right] &= 0 & \partial\Omega \text{ Sides} \\ p_{nw} &= p_{nw0}(t) & \partial\Omega \text{ Base} \end{aligned}$$

RETENTION AND PERMEABILITY RELATIONSHIPS

You can set up this two-phase flow analysis using interpolation from experimental data, arbitrary mathematical formulas, or results from other equations in the model to define how θ , C , Se , k_r , and p_c vary simultaneously. The existing model uses retention and permeability relationships from [Ref. 2](#) and [Ref. 3](#) that express changes in θ , C , Se , and k_r as a function of the capillary pressure p_c . Because p_c is large and because changes in θ , C , Se , and k_r are small, these expressions transform capillary pressure to the equivalent height of water or capillary pressure head as in $H_c = p_c / (\rho_{water} g)$. The hydraulic properties relative to the wetting fluid in van Genuchten retention model are

$$\theta_w = \begin{cases} \theta_{r,w} + \text{Se}_w(\theta_{s,w} - \theta_{r,w}) & H_c > 0 \\ \theta_{s,w} & H_c \leq 0 \end{cases}$$

$$\text{Se}_w = \begin{cases} \frac{1}{[1 + |\alpha H_c|^n]^m} & H_c > 0 \\ 1 & H_c \leq 0 \end{cases}$$

$$C_w = \begin{cases} \frac{\alpha m}{1-m}(\theta_{s,w} - \theta_{r,w})\text{Se}_w^{\frac{1}{m}}\left(1 - \text{Se}_w^{\frac{1}{m}}\right)^m & H_c > 0 \\ 0 & H_c \leq 0 \end{cases}$$

$$k_{r,w} = \begin{cases} \text{Se}_w^L \left[1 - \left(1 - \text{Se}_w^{\frac{1}{m}}\right)^m\right]^2 & H_c > 0 \\ 1 & H_c \leq 0 \end{cases}$$

where α , n , m , and L denote soil characteristics. Note that with two-phase flow, the van Genuchten–Mualem formulas hinge on the value of H_c .

For the nonwetting fluid, the properties

$$\begin{aligned} \theta_{nw} &= \theta_{s,w} - \theta_w \\ \text{Se}_{nw} &= 1 - \text{Se}_w \\ C_{nw} &= -C_w \\ k_{r,nw} &= (1 - \text{Se}_w)^L \left(1 - \text{Se}_w^{\frac{1}{m}}\right)^{m2} \end{aligned}$$

arise from the definitions for the wetting phase.

DIFFERENT FLUID PAIRS

When switching between air-water, air-oil, and oil-water experiments, the authors used different scaling with interfacial tensions according to Leverett (Ref. 4). The Leverett scaling adjusts the nonwetting phase pressure at the column top to produce the same volume of wetting fluid outflow at the column bottom regardless of the fluid pair. With

Leverett scaling, switching between fluid pairs requires using the correct fluid properties ρ and μ for the fluid pair and adjusting the boundary and initial pressures according to

$$\sigma_{aw} P_{c, aw} = \sigma_{aw} P_{c, aw}$$

$$\sigma_{aw} P_{c, aw} = \sigma_{aw} P_{c, ao}$$

$$\sigma_{aw} P_{c, aw} = \sigma_{aw} P_{c, ow}$$

In these equations, σ represents the interfacial tension between the different fluids, and the subscripts denote the fluid pair. These values appear in a table at the end of this section. For example, σ_{ao}/σ_{aw} equals 0.373, and σ_{ow}/σ_{aw} equals 0.534; further, the first nonwetting phase pressure head (in meters of water) is 0.4 m for the air-water system, 0.1 m for the air-oil system, and 0.2 m for the water-oil system.

Because relative permeability and retention properties for a porous medium depend on the fluid moving through it, switching fluid pairs also requires switching the retention and permeability properties in the model. This requirement can mean inserting new experimental data or adjusting mathematical formulas. In this model, the authors assessed the permeability and retention parameters were assessed by curve fitting to analytic formulas. They adjusted the parameters α , n , κ_s , and θ_r to get the best fit for each fluid. A review of the data tables that follow reveals that the ratios in the α values for the different fluid pairs roughly equals the σ ratios just given.

Implementation: Step Change on a Boundary

The following step-by-step instructions define the timing of the stepped nonwetting phase pressures at the inlet by using an interpolation function. Interpolating in COMSOL Multiphysics is straightforward. Add an **Interpolation** function under **Global Definitions**, set up the table with the times and corresponding pressure heads, assign a name to the interpolation function, and use it where the function is needed. To activate the functions created, simply enter the function name (for example, `Hp_nw_t`) along with the argument — that is, the time t in parentheses. For example, you define the nonwetting pressure as

$$p_{nw} = Hp_{nw_t}(t) * rho_{water} * g_{const}$$

The density of water appears in the equation because [Ref. 1](#) defines the boundary pressure as a height of water.

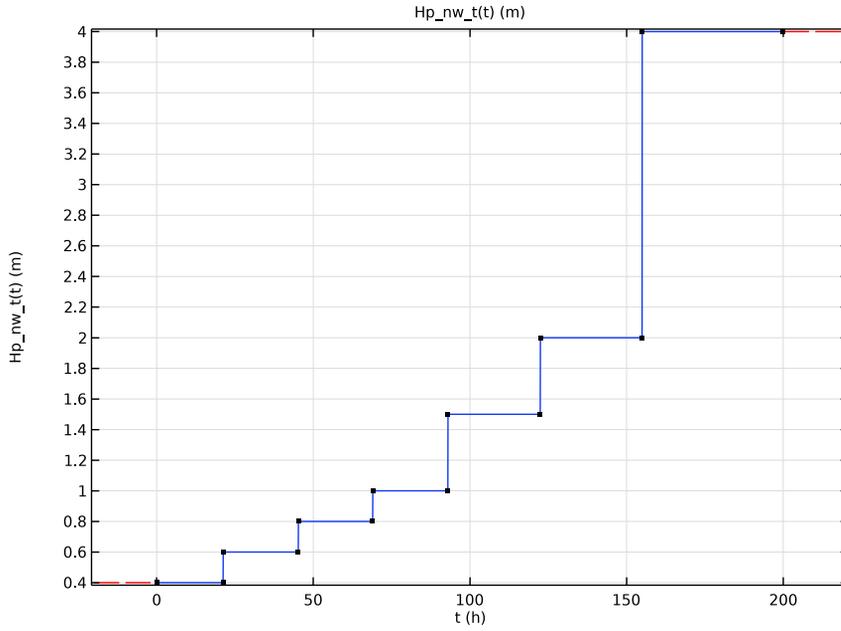


Figure 2: Interpolation function used for $H_{p_nw_t}(t)$.

Data

The data used in this model correspond to the air-water experiments for the Lincoln sand as reported in [Ref. 1](#):

| VARIABLE | EXPRESSION | DESCRIPTION |
|----------------|--|--|
| ρ_w | 1000 kg/m^3 | Fluid density, water |
| μ_w | $1 \cdot 10^{-3} \text{ Pa}\cdot\text{s}$ | Dynamic viscosity, water |
| ρ_a | 1.28 kg/m^3 | Fluid density, air |
| μ_a | $1.81 \cdot 10^{-5} \text{ Pa}\cdot\text{s}$ | Dynamic viscosity, air |
| κ_{int} | 2480 mD | Intrinsic permeability, column |
| κ_s | 13.57 mD | Permeability, disc |
| θ_s | 0.32 | Saturated volume fraction, columnTab |
| $\theta_{s,u}$ | 0.5 | Saturated volume fraction, disc |
| $p_{nw,top}$ | 0.2 m water | Initial pressure head at inlet, nonwetting phase |

The van Genuchten parameters for the different fluid pairs are the following:

| VARIABLE | DESCRIPTION | UNIT | AIR-WATER | AIR-OIL | OIL-WATER |
|------------|--------------------------|----------|-----------------------|-----------------------|-----------------------|
| $q_{r,w}$ | Residual volume fraction | | 0.021 | 0.00001 | 0.0072 |
| α | alpha parameter | m^{-1} | 1.89 | 5.29 | 3.58 |
| n | n parameter, column | | 2.811 | 3.002 | 3.1365 |
| L | L parameter, column | | 0.5 | 0.5 | 0.5 |
| κ_s | Permeability, disc | m^{-2} | $2.48 \cdot 10^{-12}$ | $1.09 \cdot 10^{-12}$ | $0.94 \cdot 10^{-12}$ |

Pressure head at the air inlet increments in time according to the table below, see [Figure 2](#).

| PRESSURE HEAD (m water) | START TIME (hours) |
|-------------------------|--------------------|
| 0.4 | 0 |
| 0.6 | 21.25 |
| 0.8 | 45.25 |
| 1.0 | 69 |
| 1.5 | 93 |
| 2 | 122.5 |
| 4 | 155 |

At the water outlet, the fluid level in the receiving buret increases linearly in time from 0 m to 0.1 m.

Results and Discussion

Figure 3 shows an early-time snapshot from the COMSOL Multiphysics solution for two-phase flow in a laboratory column. The shading depicts the effective saturation of the nonwetting phase (air), while the arrows give the wetting phase (water) velocities.

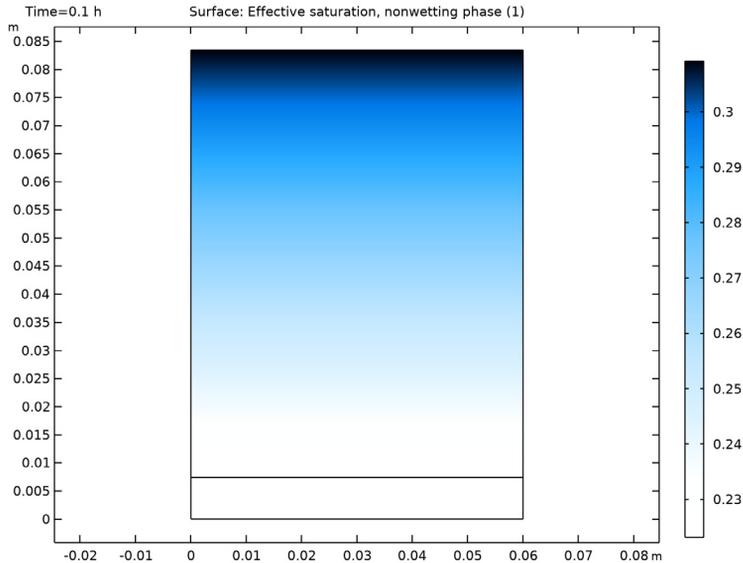


Figure 3: Solution to two-phase flow model at 0.1 hours: nonwetting phase saturation (surface plot). Results correspond to air-water experiment on Lincoln soil from the US EPA.

The image illustrates the nonwetting fluid entering the soil column and displacing the wetting fluid. The nonwetting phase enters because it is being forced into the inlet with a multistep pressure change.

Figure 4 shows the stepped pressure head used at the inlet boundary along with the capillary pressure in the column at various elevations. Specifying the point locations during postprocessing circumvents the need to plan observation sites during input. The solution to the two-phase flow problem provided is an excellent match to the results of Ref. 1.

That the capillary pressure head and the air inlet pressure in Figure 4 track together is what made the laboratory setup successful. To get high resolution on the permeability and retention behaviors, the authors in Ref. 1 set the pressure steps large enough that the

impact is instantaneous in the soil column. As shown in Figure 5, the permeability changes instantaneously throughout the column.

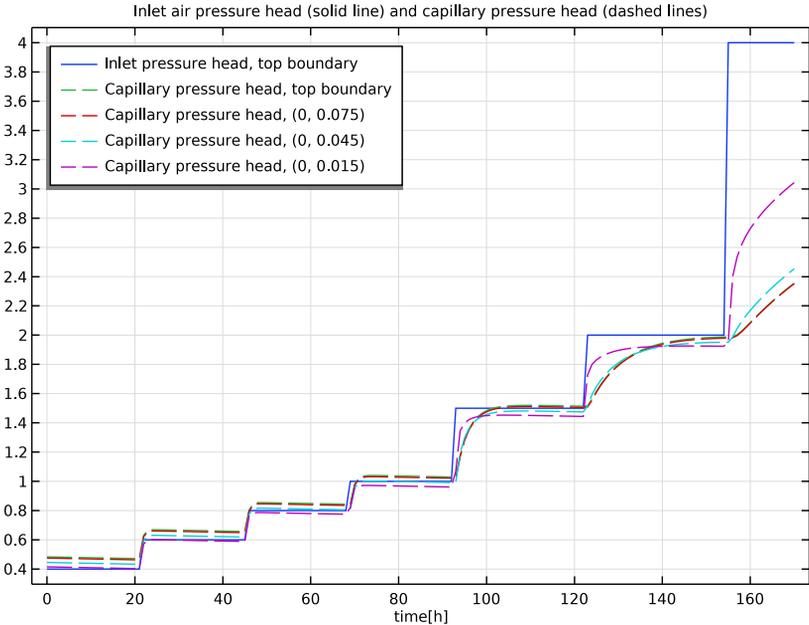


Figure 4: Inlet air pressure head (solid line) and capillary pressure head (dashed lines) for air-water flow in Lincoln soil.

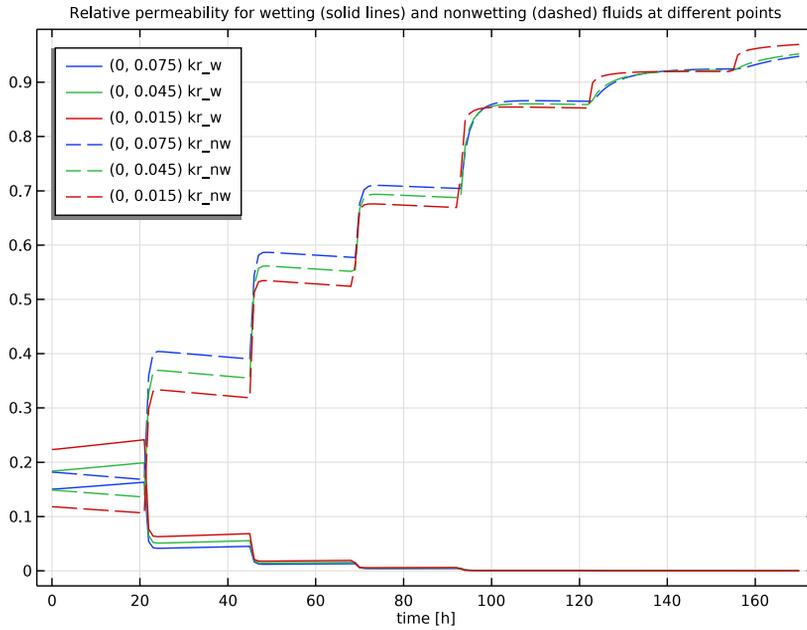


Figure 5: Relative permeability functions for water (solid lines) and air (dashed lines) for Lincoln soil at three different points.

Solutions for two-phase flow for the air-oil and oil-water systems appear in [Figure 6](#) and [Figure 7](#), respectively.

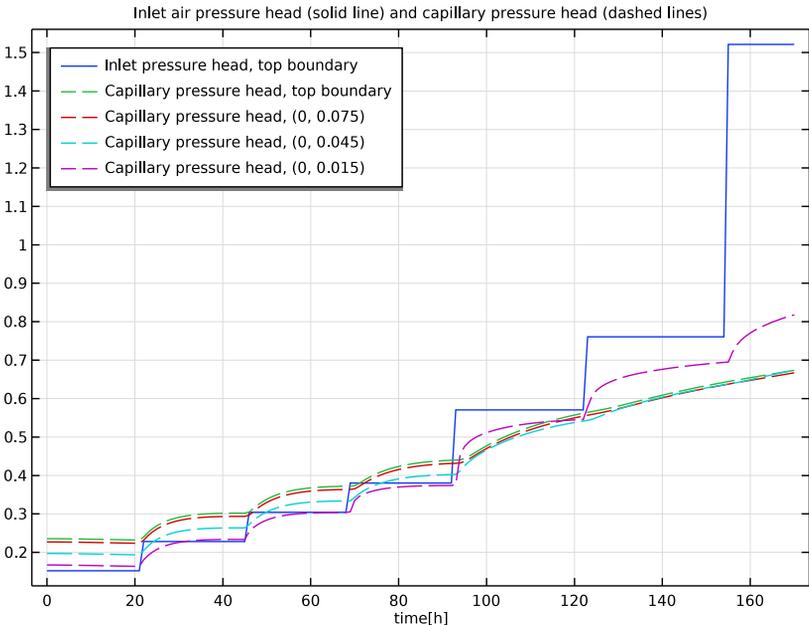


Figure 6: Inlet-air pressure head (solid line) and capillary pressure head (dashed lines) for air-oil flow in Lincoln soil.

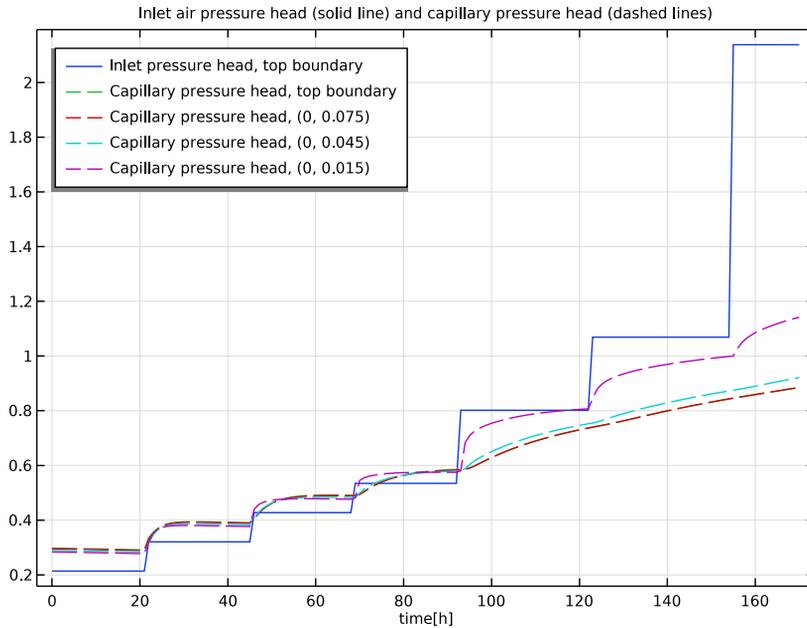


Figure 7: Inlet-air pressure head (solid line) and capillary pressure head (dashed lines) for oil-water flow in Lincoln soil.

The COMSOL Multiphysics results for the air-oil and oil-water two-phase flow problems prove to be in agreement to the results shown in Ref. 1. Through Leverett scaling you set the inlet pressure so that the air-oil and oil-water systems would produce the volume outflow rate from the air-water experiment. As with the air-water system, the capillary pressure head and air-inlet pressure for the air-oil experiment track instantaneously. For the water-oil system, however, there is a lag between the nonwetting and wetting phase pressures.

References

1. J.W. Hopmans, M.E. Grismer, J. Chen, and Y.P. Liu, *Parameter Estimation of Two-fluid Capillary Pressure Saturation and Permeability Functions*, U.S. Environmental Protection Agency EPA/600/R-98/046, Cincinnati, Ohio, 1998.
2. Y. Mualem, “A new model for predicting the hydraulic permeability of unsaturated porous media”, *Water Res. Research*, vol. 12, pp. 513–522, 1976.

3. M.Th. van Genuchten, “A closed-form equation for predicting the hydraulic of conductivity of unsaturated soils”, *Soil Sci. Soc. Am. J.*, vol. 44, pp. 892–898, 1980.
4. M.C. Leverett, “Capillary behavior in porous solids”, *Trans. AIME*, vol. 142, pp. 152–169, 1941.

Application Library path: Subsurface_Flow_Module/Fluid_Flow/
twophase_flow_column

Modeling Instructions

From the **File** menu, choose **New**.

NEW

In the **New** window, click  **Model Wizard**.

MODEL WIZARD

- 1 In the **Model Wizard** window, click  **2D**.
- 2 In the **Select Physics** tree, select **Fluid Flow > Porous Media and Subsurface Flow > Darcy's Law (dl)**.
- 3 Click **Add**.
- 4 In the **Pressure (Pa)** text field, type p_w .
- 5 In the **Select Physics** tree, select **Fluid Flow > Porous Media and Subsurface Flow > Darcy's Law (dl)**.
- 6 Click **Add**.
- 7 In the **Pressure (Pa)** text field, type p_{nw} .
- 8 Click  **Study**.
- 9 In the **Select Study** tree, select **General Studies > Time Dependent**.
- 10 Click  **Done**.

GLOBAL DEFINITIONS

Parameters I

- 1 In the **Model Builder** window, under **Global Definitions** click **Parameters I**.
- 2 In the **Settings** window for **Parameters**, locate the **Parameters** section.

3 Click  **Load from File**.

4 Browse to the model's Application Libraries folder and double-click the file `twophase_flow_column_parameters.txt`.

Define an interpolation function for the stepped pressure on the nonwetting phase boundary using the data available in a file.

Inlet Air Pressure Head

1 In the **Home** toolbar, click  **Functions** and choose **Global > Interpolation**.

2 In the **Settings** window for **Interpolation**, locate the **Definition** section.

3 From the **Data source** list, choose **File**.

4 Click  **Browse**.

5 Browse to the model's Application Libraries folder and double-click the file `twophase_flow_column_interpolation.txt`.

6 Click  **Import**.

7 Locate the **Units** section. In the **Function** table, enter the following settings:

| Function | Unit |
|----------|------|
| int l | m |

8 In the **Argument** table, enter the following settings:

| Argument | Unit |
|----------|------|
| t | h |

9 Locate the **Definition** section. In the **Function name** text field, type `Hp_nw_t`.

10 In the **Label** text field, type `Inlet Air Pressure Head`.

11 Click  **Plot**, and compare with [Figure 2](#)

GEOMETRY I

Rectangle 1 (r1)

1 In the **Geometry** toolbar, click  **Rectangle**.

2 Click the  **Zoom Extents** button in the **Graphics** toolbar.

3 In the **Settings** window for **Rectangle**, locate the **Size and Shape** section.

4 In the **Height** text field, type `0.0834`.

5 In the **Width** text field, type `0.06`.

6 Click to expand the **Layers** section. In the table, enter the following settings:

| Layer name | Thickness (m) |
|------------|---------------|
| Layer 1 | 0.0074 |

7 Click  **Build All Objects**.

DEFINITIONS

The following modeling steps create a step function that is used later to create a smooth ramp for the effective saturation.

Ramp 1 (rml)

- 1 In the **Definitions** toolbar, click  **More Functions** and choose **Ramp**.
- 2 In the **Settings** window for **Ramp**, click to expand the **Smoothing** section.
- 3 Select the **Size of transition zone at start** checkbox. In the associated text field, type 1e-3.
Add variables to simulate two-phase flow for the air-water system.

Air-Water Experiment

- 1 In the **Definitions** toolbar, click  **Local Variables**.
- 2 In the **Settings** window for **Variables**, type Air-Water Experiment in the **Label** text field.
- 3 Locate the **Variables** section. Click  **Load from File**.
- 4 Browse to the model's Application Libraries folder and double-click the file `twophase_flow_column_air_water.txt`.

Import the variables that define the Van Genuchten retention model, initial and boundary conditions as well as the material properties of the lower and the upper layers. The parameters are presented in the [Data](#) section.

Van Genuchten Retention Model

- 1 In the **Definitions** toolbar, click  **Local Variables**.
- 2 In the **Settings** window for **Variables**, type Van Genuchten Retention Model in the **Label** text field.
- 3 Locate the **Variables** section. Click  **Load from File**.
- 4 Browse to the model's Application Libraries folder and double-click the file `twophase_flow_column_retention_model.txt`.

Initial and Boundary Conditions

- 1 In the **Definitions** toolbar, click  **Local Variables**.
- 2 In the **Settings** window for **Variables**, type Initial and Boundary Conditions in the **Label** text field.
- 3 Locate the **Variables** section. Click  **Load from File**.
- 4 Browse to the model's Application Libraries folder and double-click the file `twophase_flow_column_initial_conditions.txt`.

Lower Layer

- 1 In the **Definitions** toolbar, click  **Local Variables**.
- 2 In the **Settings** window for **Variables**, type Lower Layer in the **Label** text field.
- 3 Locate the **Geometric Entity Selection** section. From the **Geometric entity level** list, choose **Domain**.
- 4 Select Domain 1 only.
- 5 Locate the **Variables** section. Click  **Load from File**.
- 6 Browse to the model's Application Libraries folder and double-click the file `twophase_flow_column_lower_layer.txt`.

Upper Layer

- 1 In the **Definitions** toolbar, click  **Local Variables**.
- 2 In the **Settings** window for **Variables**, type Upper Layer in the **Label** text field.
- 3 Locate the **Geometric Entity Selection** section. From the **Geometric entity level** list, choose **Domain**.
- 4 Select Domain 2 only.
- 5 Locate the **Variables** section. Click  **Load from File**.
- 6 Browse to the model's Application Libraries folder and double-click the file `twophase_flow_column_upper_layer.txt`.

DARCY'S LAW (DL)

- 1 In the **Model Builder** window, under **Component 1 (comp1)** click **Darcy's Law (dl)**.
- 2 In the **Settings** window for **Darcy's Law**, locate the **Gravity Effects** section.
- 3 Select the **Include gravity** checkbox.

Fluid 1

- 1 In the **Model Builder** window, under **Component 1 (comp1) > Darcy's Law (dl) > Porous Medium 1** click **Fluid 1**.

- 2 In the **Settings** window for **Fluid**, locate the **Fluid Properties** section.
- 3 From the ρ list, choose **User defined**. In the associated text field, type rho_w.
- 4 From the μ list, choose **User defined**. In the associated text field, type mu_w.

Porous Matrix 1

- 1 In the **Model Builder** window, click **Porous Matrix 1**.
- 2 In the **Settings** window for **Porous Matrix**, locate the **Matrix Properties** section.
- 3 From the ϵ_p list, choose **User defined**. In the associated text field, type 0.25.
- 4 From the κ list, choose **User defined**. In the associated text field, type kap_s.

Porous Medium 2

- 1 In the **Model Builder** window, under **Component 1 (comp1) > Darcy's Law (dl)** right-click **Porous Medium 1** and choose **Duplicate**.
- 2 Select Domain 2 only.
- 3 In the **Settings** window for **Porous Medium**, locate the **Porous Medium** section.
- 4 From the **Storage model** list, choose **User defined**. In the S_p text field, type Cp.

Porous Matrix 1

- 1 In the **Model Builder** window, expand the **Porous Medium 2** node, then click **Porous Matrix 1**.
- 2 In the **Settings** window for **Porous Matrix**, locate the **Matrix Properties** section.
- 3 In the κ text field, type kap_s*kr_w.

Initial Values 1

- 1 In the **Model Builder** window, under **Component 1 (comp1) > Darcy's Law (dl)** click **Initial Values 1**.
- 2 In the **Settings** window for **Initial Values**, locate the **Initial Values** section.
- 3 In the p_w text field, type p_w_init.

Pressure 1

- 1 In the **Physics** toolbar, click  **Boundaries** and choose **Pressure**.
- 2 Select Boundary 2 only.
- 3 In the **Settings** window for **Pressure**, locate the **Pressure** section.
- 4 In the p_0 text field, type p_w0.

Mass Source 1

- 1 In the **Physics** toolbar, click  **Domains** and choose **Mass Source**.

- 2 Select Domain 2 only.
- 3 In the **Settings** window for **Mass Source**, locate the **Mass Source** section.
- 4 In the Q_m text field, type $C_p * p_{nw} * \rho_w$.

DARCY'S LAW 2 (DL2)

- 1 In the **Model Builder** window, under **Component 1 (comp1)** click **Darcy's Law 2 (dl2)**.
- 2 Select Domain 2 only.
- 3 In the **Settings** window for **Darcy's Law**, locate the **Gravity Effects** section.
- 4 Select the **Include gravity** checkbox.

Porous Medium 1

- 1 In the **Model Builder** window, under **Component 1 (comp1)** > **Darcy's Law 2 (dl2)** click **Porous Medium 1**.
- 2 In the **Settings** window for **Porous Medium**, locate the **Porous Medium** section.
- 3 From the **Storage model** list, choose **User defined**. In the S_p text field, type C_p .

Fluid 1

- 1 In the **Model Builder** window, click **Fluid 1**.
- 2 In the **Settings** window for **Fluid**, locate the **Fluid Properties** section.
- 3 From the ρ list, choose **User defined**. In the associated text field, type ρ_{nw} .
- 4 From the μ list, choose **User defined**. In the associated text field, type μ_{nw} .

Porous Matrix 1

- 1 In the **Model Builder** window, click **Porous Matrix 1**.
- 2 In the **Settings** window for **Porous Matrix**, locate the **Matrix Properties** section.
- 3 From the ϵ_p list, choose **User defined**. In the associated text field, type 0.25.
- 4 From the κ list, choose **User defined**. In the associated text field, type $\kappa_{s*kr_{nw}}$.

Initial Values 1

- 1 In the **Model Builder** window, under **Component 1 (comp1)** > **Darcy's Law 2 (dl2)** click **Initial Values 1**.
- 2 In the **Settings** window for **Initial Values**, locate the **Initial Values** section.
- 3 In the p_{nw} text field, type p_{nw_init} .

Pressure 1

- 1 In the **Physics** toolbar, click  **Boundaries** and choose **Pressure**.
- 2 Select Boundary 5 only.

- 3 In the **Settings** window for **Pressure**, locate the **Pressure** section.
- 4 In the p_0 text field, type p_{nw_top} .

Mass Source 1

- 1 In the **Physics** toolbar, click  **Domains** and choose **Mass Source**.
- 2 Select Domain 2 only.
- 3 In the **Settings** window for **Mass Source**, locate the **Mass Source** section.
- 4 In the Q_m text field, type $Cp * p_wt * rho_nw$.

MESH 1

Mapped 1

- 1 In the **Mesh** toolbar, click  **Mapped**.
- 2 In the **Settings** window for **Mapped**, locate the **Domain Selection** section.
- 3 From the **Geometric entity level** list, choose **Entire geometry**.

Size

- 1 In the **Model Builder** window, click **Size**.
- 2 In the **Settings** window for **Size**, locate the **Element Size** section.
- 3 From the **Predefined** list, choose **Extra fine**.
- 4 Click  **Build All**.

AIR-WATER

- 1 In the **Model Builder** window, click **Study 1**.
- 2 In the **Settings** window for **Study**, type Air-Water in the **Label** text field.
- 3 Locate the **Study Settings** section. Clear the **Generate default plots** checkbox.

Step 1: Time Dependent

- 1 In the **Model Builder** window, under **Air-Water** click **Step 1: Time Dependent**.
- 2 In the **Settings** window for **Time Dependent**, locate the **Study Settings** section.
- 3 From the **Time unit** list, choose **h**.
- 4 In the **Output times** text field, type 0 0.001 0.01 0.1 range(1,170).
- 5 In the **Study** toolbar, click  **Compute**.

RESULTS

Create point datasets for plotting the capillary pressure head and the relative permeabilities at several points.

Cut Point 2D 1

- 1 In the **Model Builder** window, expand the **Results** node.
- 2 Right-click **Results > Datasets** and choose **Cut Point 2D**.
- 3 In the **Settings** window for **Cut Point 2D**, locate the **Point Data** section.
- 4 In the **X** text field, type 0 0 0.
- 5 In the **Y** text field, type 0.075 0.045 0.015.
- 6 Click  **Plot**.

Next, reproduce the plot in [Figure 4](#).

Inlet Air Pressure and Capillary Pressure, Air-Water

- 1 In the **Results** toolbar, click  **ID Plot Group**.
- 2 In the **Settings** window for **ID Plot Group**, type Inlet Air Pressure and Capillary Pressure, Air-Water in the **Label** text field.
- 3 Locate the **Plot Settings** section.
- 4 Select the **x-axis label** checkbox. In the associated text field, type time[h].
- 5 Click to expand the **Title** section. From the **Title type** list, choose **Manual**.
- 6 In the **Title** text area, type Inlet air pressure head (solid line) and capillary pressure head (dashed lines).
- 7 Locate the **Legend** section. From the **Position** list, choose **Upper left**.

Point Graph 1

- 1 Right-click **Inlet Air Pressure and Capillary Pressure, Air-Water** and choose **Point Graph**.
- 2 Select Point 6 only.
- 3 In the **Settings** window for **Point Graph**, locate the **y-Axis Data** section.
- 4 In the **Expression** text field, type $H_{p_nw_t}(t)$.
- 5 Click to expand the **Legends** section. Select the **Show legends** checkbox.
- 6 From the **Legends** list, choose **Manual**.
- 7 In the table, enter the following settings:

Legends

Inlet pressure head, top boundary

- 8 In the **Inlet Air Pressure and Capillary Pressure, Air-Water** toolbar, click  **Plot**.

Point Graph 2

- 1 Right-click **Point Graph 1** and choose **Duplicate**.

- 2 In the **Settings** window for **Point Graph**, click **Replace Expression** in the upper-right corner of the **y-Axis Data** section. From the menu, choose **Component 1 (comp1) > Definitions > Variables > Hc - Capillary pressure head - m**.
- 3 Click to expand the **Coloring and Style** section. Find the **Line style** subsection. From the **Line** list, choose **Dashed**.
- 4 Locate the **Legends** section. From the **Legends** list, choose **Automatic**.
- 5 Find the **Include** subsection. Clear the **Point** checkbox.
- 6 Select the **Description** checkbox.
- 7 Find the **Prefix and suffix** subsection. In the **Suffix** text field, type , top boundary.
- 8 In the **Inlet Air Pressure and Capillary Pressure, Air-Water** toolbar, click  **Plot**.

Point Graph 3

- 1 Right-click **Point Graph 2** and choose **Duplicate**.
- 2 In the **Settings** window for **Point Graph**, locate the **Data** section.
- 3 From the **Dataset** list, choose **Cut Point 2D 1**.
- 4 Locate the **Legends** section. Find the **Include** subsection. Select the **Point** checkbox.
- 5 Clear the **Description** checkbox.
- 6 Find the **Prefix and suffix** subsection. Clear the **Suffix** text field.
- 7 In the **Prefix** text field, type Capillary pressure head, .
- 8 In the **Inlet Air Pressure and Capillary Pressure, Air-Water** toolbar, click  **Plot**.

To generate the plots in [Figure 5](#) and [Figure 3](#), continue with the steps below.

Relative Permeabilities at 3 Points

- 1 In the **Results** toolbar, click  **ID Plot Group**.
- 2 In the **Settings** window for **ID Plot Group**, type Relative Permeabilities at 3 Points in the **Label** text field.
- 3 Locate the **Data** section. From the **Dataset** list, choose **Cut Point 2D 1**.
- 4 Locate the **Title** section. From the **Title type** list, choose **Manual**.
- 5 In the **Title** text area, type Relative permeability for wetting (solid lines) and nonwetting (dashed) fluids at different points.
- 6 Locate the **Plot Settings** section.
- 7 Select the **x-axis label** checkbox. In the associated text field, type time [h].
- 8 Locate the **Legend** section. From the **Position** list, choose **Upper left**.

Point Graph 1

- 1 Right-click **Relative Permeabilities at 3 Points** and choose **Point Graph**.
- 2 In the **Settings** window for **Point Graph**, click **Replace Expression** in the upper-right corner of the **y-Axis Data** section. From the menu, choose **Component 1 (comp1) > Definitions > Variables > kr_w - Relative permeability, wetting phase - 1**.
- 3 Locate the **Legends** section. Select the **Show legends** checkbox.
- 4 Find the **Include** subsection. Select the **Expression** checkbox.
- 5 In the **Relative Permeabilities at 3 Points** toolbar, click  **Plot**.

Point Graph 2

- 1 Right-click **Point Graph 1** and choose **Duplicate**.
- 2 In the **Settings** window for **Point Graph**, click **Replace Expression** in the upper-right corner of the **y-Axis Data** section. From the menu, choose **Component 1 (comp1) > Definitions > Variables > kr_nw - Relative permeability, nonwetting phase - 1**.
- 3 Locate the **Coloring and Style** section. Find the **Line style** subsection. From the **Line** list, choose **Dashed**.
- 4 From the **Color** list, choose **Cycle (reset)**.
- 5 In the **Relative Permeabilities at 3 Points** toolbar, click  **Plot**.

2D Plot Group 3

- 1 In the **Results** toolbar, click  **2D Plot Group**.
- 2 In the **Settings** window for **2D Plot Group**, locate the **Data** section.
- 3 From the **Time (h)** list, choose **0.1**.

Surface 1

- 1 Right-click **2D Plot Group 3** and choose **Surface**.
- 2 In the **Settings** window for **Surface**, click **Replace Expression** in the upper-right corner of the **Expression** section. From the menu, choose **Component 1 (comp1) > Definitions > Variables > Se_nw - Effective saturation, nonwetting phase - 1**.
- 3 Locate the **Coloring and Style** section. From the **Color table** list, choose **JupiterAuroraBorealis**.
- 4 From the **Color table transformation** list, choose **Reverse**.
- 5 In the **2D Plot Group 3** toolbar, click  **Plot**.
- 6 Click the  **Zoom Extents** button in the **Graphics** toolbar.

Effective Saturation, Nonwetting Phase

- 1 In the **Model Builder** window, under **Results** click **2D Plot Group 3**.

- 2 In the **Settings** window for **2D Plot Group**, type Effective Saturation, Nonwetting Phase in the **Label** text field.

Perform similar studies with air-oil and oil-water to generate the plots in [Figure 6](#) and [Figure 7](#).

DEFINITIONS

Air-Oil Experiment

- 1 In the **Definitions** toolbar, click  **Local Variables**.
- 2 In the **Settings** window for **Variables**, type Air-Oil Experiment in the **Label** text field.
- 3 Locate the **Variables** section. Click  **Load from File**.
- 4 Browse to the model's Application Libraries folder and double-click the file `twophase_flow_column_air_oil.txt`.

Oil-Water Experiment

- 1 In the **Definitions** toolbar, click  **Local Variables**.
- 2 In the **Settings** window for **Variables**, type Oil-Water Experiment in the **Label** text field.
- 3 Locate the **Variables** section. Click  **Load from File**.
- 4 Browse to the model's Application Libraries folder and double-click the file `twophase_flow_column_oil_water.txt`.

AIR-WATER

Step 1: Time Dependent

- 1 In the **Model Builder** window, under **Air-Water** click **Step 1: Time Dependent**.
- 2 In the **Settings** window for **Time Dependent**, locate the **Physics and Variables Selection** section.
- 3 Select the **Modify model configuration for study step** checkbox.
- 4 In the tree, select **Component 1 (comp1) > Definitions > Air-Oil Experiment** and **Component 1 (comp1) > Definitions > Oil-Water Experiment**.
- 5 Right-click and choose **Disable**.

ADD STUDY

- 1 In the **Home** toolbar, click  **Add Study** to open the **Add Study** window.
- 2 Go to the **Add Study** window.

- 3 Find the **Studies** subsection. In the **Select Study** tree, select **General Studies > Time Dependent**.
- 4 Click the **Add Study** button in the window toolbar.
- 5 In the **Home** toolbar, click  **Add Study** to close the **Add Study** window.

AIR-OIL

- 1 In the **Settings** window for **Study**, type Air-Oil in the **Label** text field.
- 2 Locate the **Study Settings** section. Clear the **Generate default plots** checkbox.
 - 1 In the **Model Builder** window, under **Air-Oil** click **Step 1: Time Dependent**.
 - 2 In the **Settings** window for **Time Dependent**, locate the **Study Settings** section.
 - 3 From the **Time unit** list, choose **h**.
 - 4 In the **Output times** text field, type 0 0.001 0.01 0.1 range(1,170).
 - 5 Locate the **Physics and Variables Selection** section. Select the **Modify model configuration for study step** checkbox.
 - 6 In the tree, select **Component 1 (comp1) > Definitions > Air-Water Experiment** and **Component 1 (comp1) > Definitions > Oil-Water Experiment**.
 - 7 Right-click and choose **Disable**.
 - 8 In the **Study** toolbar, click  **Compute**.

RESULTS

Cut Point 2D 2

- 1 In the **Model Builder** window, under **Results > Datasets** right-click **Cut Point 2D 1** and choose **Duplicate**.
- 2 In the **Settings** window for **Cut Point 2D**, locate the **Data** section.
- 3 From the **Dataset** list, choose **Air-Oil/Solution 2 (sol2)**.

Inlet Air Pressure and Capillary Pressure, Air-Oil

- 1 In the **Model Builder** window, right-click **Inlet Air Pressure and Capillary Pressure, Air-Water** and choose **Duplicate**.
- 2 In the **Settings** window for **ID Plot Group**, type Inlet Air Pressure and Capillary Pressure, Air-Oil in the **Label** text field.
- 3 Locate the **Data** section. From the **Dataset** list, choose **Air-Oil/Solution 2 (sol2)**.

Point Graph 1

- 1 In the **Model Builder** window, expand the **Inlet Air Pressure and Capillary Pressure, Air-Oil** node, then click **Point Graph 1**.
- 2 In the **Settings** window for **Point Graph**, locate the **y-Axis Data** section.
- 3 In the **Expression** text field, type $H_{p_nw_t}(t) * \sigma$.

Point Graph 3

- 1 In the **Model Builder** window, click **Point Graph 3**.
- 2 In the **Settings** window for **Point Graph**, locate the **Data** section.
- 3 From the **Dataset** list, choose **Cut Point 2D 2**.
- 4 In the **Inlet Air Pressure and Capillary Pressure, Air-Oil** toolbar, click  **Plot**.

ADD STUDY

- 1 In the **Home** toolbar, click  **Add Study** to open the **Add Study** window.
- 2 Go to the **Add Study** window.
- 3 Find the **Studies** subsection. In the **Select Study** tree, select **General Studies > Time Dependent**.
- 4 Click the **Add Study** button in the window toolbar.
- 5 In the **Home** toolbar, click  **Add Study** to close the **Add Study** window.

OIL-WATER

- 1 In the **Settings** window for **Study**, type Oil-Water in the **Label** text field.
- 2 Locate the **Study Settings** section. Clear the **Generate default plots** checkbox.

Step 1: Time Dependent

- 1 In the **Model Builder** window, under **Oil-Water** click **Step 1: Time Dependent**.
- 2 In the **Settings** window for **Time Dependent**, locate the **Study Settings** section.
- 3 From the **Time unit** list, choose **h**.
- 4 In the **Output times** text field, type $0 \ 0.001 \ 0.01 \ 0.1 \ \text{range}(1, 170)$.
- 5 Locate the **Physics and Variables Selection** section. Select the **Modify model configuration for study step** checkbox.
- 6 In the tree, select **Component 1 (comp1) > Definitions > Air-Water Experiment** and **Component 1 (comp1) > Definitions > Air-Oil Experiment**.
- 7 Right-click and choose **Disable**.
- 8 In the **Study** toolbar, click  **Compute**.

RESULTS

Cut Point 2D 3

- 1 In the **Model Builder** window, under **Results > Datasets** right-click **Cut Point 2D 2** and choose **Duplicate**.
- 2 In the **Settings** window for **Cut Point 2D**, locate the **Data** section.
- 3 From the **Dataset** list, choose **Oil-Water/Solution 3 (sol3)**.

Inlet Air Pressure and Capillary Pressure, Oil-Water

- 1 In the **Model Builder** window, right-click **Inlet Air Pressure and Capillary Pressure, Air-Oil** and choose **Duplicate**.
- 2 In the **Settings** window for **ID Plot Group**, type Inlet Air Pressure and Capillary Pressure, Oil-Water in the **Label** text field.
- 3 Locate the **Data** section. From the **Dataset** list, choose **Oil-Water/Solution 3 (sol3)**.

Point Graph 3

- 1 In the **Model Builder** window, expand the **Inlet Air Pressure and Capillary Pressure, Oil-Water** node, then click **Point Graph 3**.
- 2 In the **Settings** window for **Point Graph**, locate the **Data** section.
- 3 From the **Dataset** list, choose **Cut Point 2D 3**.
- 4 In the **Inlet Air Pressure and Capillary Pressure, Oil-Water** toolbar, click  **Plot**.